


Overview

At A Glance

- Supports up to two Intel® Xeon™ processors, up to 3.06 GHz
- 512 KB L2 cache integrated on processor
- Intel E7505 chipset with dual memory channels (4.2 GB/s throughput) and 533 MHz front side bus
- PC2100 ECC registered DDR-266 expandable to 12 GB (with 2GB DIMMs)
- Ultra320 SCSI hard drives (10,000 or 15,000 rpm) or Ultra ATA/100 hard drives (7200 rpm)
- Integrated dual-channel Ultra320 SCSI and Ultra ATA/100 controllers
- Up to 730 GB of high-performance internal storage
- Choice of leadership graphics:
 - NVIDIA Quadro NVS 200,
 - NVIDIA Quadro NVS 400,
 - NVIDIA Quadro4 380XGL,
 - NVIDIA Quadro2 EX,
 - ATI FIRE GL 8800,
 - ATI FIRE GL Z1-128p
 - NVIDIA Quadro4 750 XGL,
 - NVIDIA Quadro4 980 XGL,
 - NVIDIA Quadro4 900 XGL,
 - 3Dlabs Wildcat III 6110,
 - ATI FIRE GL X1-256p,
 - NVIDIA Quadro FX2000
- Support for up to 8 displays
- Integrated Intel 10/100/1000 Mb Ethernet adapter
- Six total slots – five PCI and one AGP 8X
- Eight bays (five internal, three external)
- CD-ROM, CD-RW, DVD-ROM, or DVD+RW
- Windows® XP Professional, Windows 2000 Professional, or Red Hat Linux
- Protected by HP services, including a three-year limited warranty in many countries. Certain restrictions and exclusions apply. Three-year onsite labor not available in all countries.

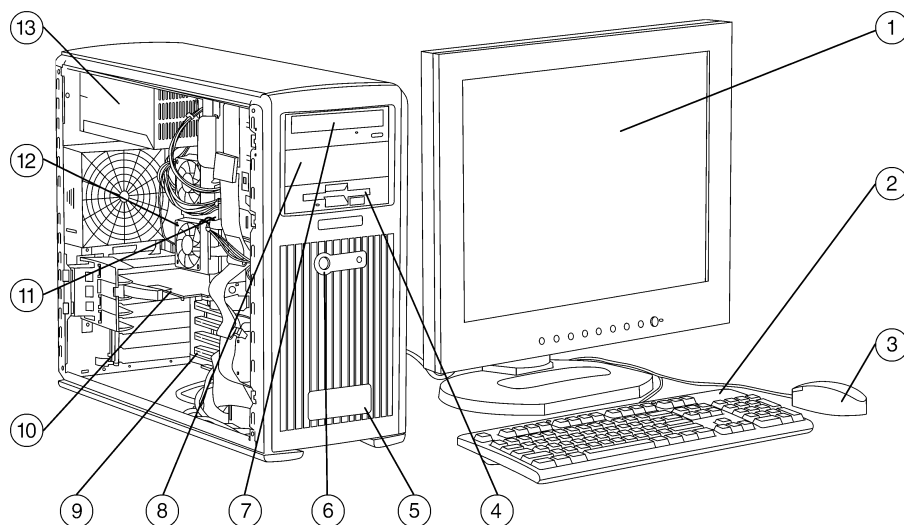

1. HP monitor (optional)
2. HP keyboard
3. HP mouse
4. Floppy drive
5. Port cover: USB, IEEE-1394, microphone, headphone
6. On-off button
7. Optical drive
8. Available drive bay
9. Expansion slots
10. Graphics slot
11. Memory sockets
12. Processor(s)
13. Power supply



Standard Features

Processor	Intel Xeon processor 2.4-GHz, 512-KB cache, 533-MHz front side bus Intel Xeon processor 2.66-GHz, 512-KB cache, 533-MHz front side bus Intel Xeon processor 2.8-GHz, 512-KB cache, 533-MHz front side bus Intel Xeon processor 3.06-GHz, 512-KB cache, 533-MHz front side bus	
Cache Memory	512-KB integrated, full speed Level 2 cache per processor	
Chipset	Intel E7505 chipset	
Processor Upgradability	Upgradable to dual processor	
Memory	Standard	512-MB of PC2100 ECC registered DDR-266
	Maximum	12-GB of PC2100 ECC registered DDR-266*
Network Controller	Integrated Intel 10/100/1000 Mb Ethernet adapter	
Expansion Slots	I/O (Total)	6, up to 5 available
	PCI-X 1.0 64b/133MHz	1, up to 1 depending on model
	PCI-X 1.0 64b/100MHz	2, up to 2 depending on model
	PCI 2.2 32b/33MHz	2, up to 2 depending on model
	AGP 8x Pro 50 (50w)	1, up to 1 depending on model
Expansion Bays	(Total/Available)	8 total / 5 available
	Internal 3.5 inch	5 bays / 4 available
	External 5.25 inch	2 bays / 1 available
	External 3.5 inch	1 external floppy drive
Controllers	SCSI	Integrated dual channel Ultra320 SCSI controller
	Ultra ATA/100	Integrated Ultra ATA/100
Storage	Diskette Drive	1.44 MB
	Removable Media	CD-ROM, DVD-ROM, CD-RW, or DVD+RW
	Hard Drive	40-GB, 80-GB, 120-GB, 160-GB Ultra ATA/100 EIDE (7,200 rpm) 18-GB, 36-GB, or 73-GB Ultra320 SCSI (15,000 rpm); 36-GB, 73-GB, or 146-GB Ultra320 SCSI (10,000 rpm)
Interfaces	Parallel	One 25-pin DIN (rear)
	USB 2.0	6 (2 front, 4 rear)
	Serial	One 9-pin DIN (rear)
	Ultra320 SCSI	2 (68-pin internal and optional 68-pin external)
	Ultra ATA/100	2 (internal)
	IEEE 1394	2 (1 front, 1 back)
	Keyboard (PS/2)	1 (rear)
	Pointing Device (PS/2 mouse)	1 (rear)
	Video	choice of professional graphics options
	Network	1 RJ-45 connector (rear)
	Microphone Jack	2 (front & rear)
	Headphone Jack	1 (front)
	Line-In Jack	1 (rear)
	Line-Out Jack	1 (rear)

Standard Features

Graphics <i>One of the following:</i>	NVIDIA Quadro NVS 200 (AGP) NVIDIA Quadro NVS 400 (AGP) NVIDIA Quadro2 EX (AGP) NVIDIA Quadro4 380 XGL (AGP) ATI FIRE GL 8800 (AGP) ATI FIRE GL Z1-128p (AGP) NVIDIA Quadro4 750 XGL (AGP) NVIDIA Quadro4 980 XGL (AGP) NVIDIA Quadro4 900 XGL (AGP) 3Dlabs Wildcat III 6110 (AGP) ATI FIRE GL X1-256p (AGP) NVIDIA Quadro FX2000
Input devices	Easy Access Keyboard (PS/2) 3-Button Mouse (PS/2)
Audio	AC97/16-bit stereo full-duplex and Integrated speaker
Software	Microsoft Windows XP Professional preinstall Microsoft Windows 2000 Professional, service pack 3, preinstall Red Hat Linux 7.3 preinstalled, preconfigured and supported Red Hat Linux 8.0 supported
Management	Bios Features Advanced Configuration and Power Interface (ACPI) 1.0b Desktop Management Interface (DMI) 2.0 System Management (SM) Bios 2.3 NIC Hardware Remote Wakeup Wake on LAN (WoL) Web downloads System Software Manager Insight Management Agent Altiris Express Remote ROM Flash Remote Shut Down
Security	Diskette write and boot control Flash ROM lock Network server mode Parallel interface control Power-on password Serial interface control Setup password Cable lock provision
Power Supply	450 watts, with Power Factor Correction
Service and Support	Protected by HP services including a three-year, limited warranty with three-year parts coverage, three year, on-site service, and three-year labor (in many countries); 7 x 24 hardware technical phone support and on-line support through the Internet; Pre-Failure Warranty coverage of hard drives, memory. NOTE: Certain restrictions and exclusions apply. Consult the customer support center for details. Three-year, onsite and labor not available in all countries.

Standard Features – Pre-configured Global Models

X8X/2.4/36S/512/Xd 470047-461	Processor	Intel Xeon processor 2.4-GHz
	Cache Memory	512-KB integrated L2
	Memory	512MB (2x256-MB) PC2100 ECC registered DDR-266
	Optical Drive	16X/40X DVD-ROM Drive
	Hard Drive	36-GB Ultra320 SCSI (10,000 rpm)
	Graphics	Not included in base configuration – Please choose a graphics card option below: NVIDIA Quadro NVS 200 NVIDIA Quadro NVS 400 NVIDIA Quadro2 EX LP NVIDIA Quadro4 380XGL ATI FIRE GL 8800 ATI FIRE GL Z1-128p NVIDIA Quadro4 750 XGL NVIDIA Quadro4 980 XGL NVIDIA Quadro4 900 XGL 3DLabs Wildcat III 6110 ATI FIRE GL X1-256p NVIDIA Quadro FX2000 NOTE: Please see Part Numbers in After market options/Standalone accessories section.
	Mouse	HP 3-button mouse (PS/2)
	OS	Microsoft Windows XP Professional

X8K/2.4/18K/512/Xd 470046-976	Processor	Intel Xeon processor 2.4-GHz
	Cache Memory	512-KB integrated L2
	Memory	512MB (2x256-MB) PC2100 ECC registered DDR-266
	Optical Drive	16X/40X DVD-ROM Drive
	Hard Drive	18-GB Ultra320 SCSI (15,000 rpm)
	Graphics	ATI FIRE GL X1 Not included in base configuration – Please choose a graphics card option below: NVIDIA Quadro NVS 200 NVIDIA Quadro NVS 400 NVIDIA Quadro2 EX LP NVIDIA Quadro4 380XGL ATI FIRE GL 8800 ATI FIRE GL Z1-128p NVIDIA Quadro4 750 XGL NVIDIA Quadro4 980 XGL NVIDIA Quadro4 900 XGL 3DLabs Wildcat III 6110 ATI FIRE GL X1-256p NVIDIA Quadro FX2000 NOTE: Please see Part Numbers in After market options/Standalone accessories section.
	Mouse	HP 3-button mouse (PS/2)
	OS	Microsoft Windows 2000 Professional

Standard Features – Pre-configured Global Models

X8X/2.4/18K/512/Xd 470046-977	Processor Cache Memory Memory Optical Drive Hard Drive Graphics	Intel Xeon processor 2.4-GHz 512-KB integrated L2 512MB (2x256-MB) PC2100 ECC registered DDR-266 16X/40X DVD-ROM Drive 18-GB Ultra320 SCSI (15,000 rpm) Not included in base configuration – Please choose a graphics card option below: NVIDIA Quadro NVS 200 NVIDIA Quadro NVS 400 NVIDIA Quadro2 EX LP NVIDIA Quadro4 380XGL ATI FIRE GL 8800 ATI FIRE GL Z1-128p NVIDIA Quadro4 750 XGL NVIDIA Quadro4 980 XGL NVIDIA Quadro4 900 XGL 3DLabs Wildcat III 6110 ATI FIRE GL X1-256p NVIDIA Quadro FX2000 NOTE: Please see Part Numbers in After market options/Standalone accessories section. Mouse HP 3-button mouse (PS/2) OS Microsoft Windows XP Professional
X8X/2.4/36S/512/Xc 470046-978	Processor Cache Memory Memory Optical Drive Hard Drive Graphics	Intel Xeon processor 2.4-GHz 512-KB integrated L2 512MB (2x256-MB) PC2100 ECC registered DDR-266 CD-ROM 36-GB Ultra320 SCSI (10,000 rpm) Not included in base configuration – Please choose a graphics card option below: NVIDIA Quadro NVS 200 NVIDIA Quadro NVS 400 NVIDIA Quadro2 EX LP NVIDIA Quadro4 380XGL ATI FIRE GL 8800 ATI FIRE GL Z1-128p NVIDIA Quadro4 750 XGL NVIDIA Quadro4 980 XGL NVIDIA Quadro4 900 XGL 3DLabs Wildcat III 6110 ATI FIRE GL X1-256p NVIDIA Quadro FX2000 NOTE: Please see Part Numbers in After market options/Standalone accessories section. Mouse HP 3-button mouse (PS/2) OS Microsoft Windows XP Professional

Standard Features – Pre-configured Global Models

X8K/2.4/40A/512/Xc 470046-979	Processor	Intel Xeon processor 2.4-GHz
	Cache Memory	512-KB integrated L2
	Memory	512MB (2x256-MB) PC2100 ECC registered DDR-266
	Optical Drive	CD-ROM
	Hard Drive	40-GB Ultra ATA/100 EIDE (7,200 rpm)
	Graphics	Not included in base configuration – Please choose a graphics card option below: NVIDIA Quadro NVS 200 NVIDIA Quadro NVS 400 NVIDIA Quadro2 EX LP NVIDIA Quadro4 380XGL ATI FIRE GL 8800 ATI FIRE GL Z1-128p NVIDIA Quadro4 750 XGL NVIDIA Quadro4 980 XGL NVIDIA Quadro4 900 XGL 3DLabs Wildcat III 6110 ATI FIRE GL X1-256p NVIDIA Quadro FX2000 NOTE: Please see Part Numbers in After market options/Standalone accessories section.
	Mouse	HP 3-button mouse (PS/2)
	OS	Microsoft Windows 2000 Professional

X8X2.4/40A/512/Xc 470046-980	Processor	Intel Xeon processor 2.4-GHz
	Cache Memory	512-KB integrated L2
	Memory	512MB (2x256-MB) PC2100 ECC registered DDR-266
	Optical Drive	CD-ROM
	Hard Drive	40-GB Ultra ATA/100 EIDE (7,200 rpm)
	Graphics	Not included in base configuration – Please choose a graphics card option below: NVIDIA Quadro NVS 200 NVIDIA Quadro NVS 400 NVIDIA Quadro2 EX LP NVIDIA Quadro4 380XGL ATI FIRE GL 8800 ATI FIRE GL Z1-128p NVIDIA Quadro4 750 XGL NVIDIA Quadro4 980 XGL NVIDIA Quadro4 900 XGL 3DLabs Wildcat III 6110 ATI FIRE GL X1-256p NVIDIA Quadro FX2000 NOTE: Please see Part Numbers in After market options/Standalone accessories section.
	Mouse	HP 3-button mouse (PS/2)
	OS	Microsoft Windows XP Professional

Standard Features – Pre-configured Global Models

X8K/2.4/36S2/Xc 470046-981	Processor	Intel Xeon processor 2.4-GHz
	Cache Memory	512-KB integrated L2
	Memory	512MB (2x256-MB) PC2100 ECC registered DDR-266
	Optical Drive	CD-ROM
	Hard Drive	36-GB Ultra320 SCSI (10,000 rpm)
	Graphics	Not included in base configuration – Please choose a graphics card option below: NVIDIA Quadro NVS 200 NVIDIA Quadro NVS 400 NVIDIA Quadro2 EX LP NVIDIA Quadro4 380XGL ATI FIRE GL 8800 ATI FIRE GL Z1-128p NVIDIA Quadro4 750 XGL NVIDIA Quadro4 980 XGL NVIDIA Quadro4 900 XGL 3DLabs Wildcat III 6110 ATI FIRE GL X1-256p NVIDIA Quadro FX2000 NOTE: Please see Part Numbers in After market options/Standalone accessories section.
	Mouse	HP 3-button mouse (PS/2)
	OS	Microsoft Windows 2000 Professional

X8X/2.66/36S/512/Xd 470047-466	Processor	Intel Xeon processor 2.66-GHz
	Cache Memory	512-KB integrated L2
	Memory	512MB (2x256-MB) PC2100 ECC registered DDR-266
	Optical Drive	16X/40X DVD-ROM Drive
	Hard Drive	36-GB Ultra320 SCSI (10,000 rpm)
	Graphics	Not included in base configuration – Please choose a graphics card option below: NVIDIA Quadro NVS 200 NVIDIA Quadro NVS 400 NVIDIA Quadro2 EX LP NVIDIA Quadro4 380XGL ATI FIRE GL 8800 ATI FIRE GL Z1-128p NVIDIA Quadro4 750 XGL NVIDIA Quadro4 980 XGL NVIDIA Quadro4 900 XGL 3DLabs Wildcat III 6110 ATI FIRE GL X1-256p NVIDIA Quadro FX2000 NOTE: Please see Part Numbers in After market options/Standalone accessories section.
	Mouse	HP 3-button mouse (PS/2)
	OS	Microsoft Windows XP Professional

Standard Features – Pre-configured Global Models

X8K/2.66/18K/512/Xd 470046-998	Processor	Intel Xeon processor 2.66-GHz
	Cache Memory	512-KB integrated L2
	Memory	512MB (2x256-MB) PC2100 ECC registered DDR-266
	Optical Drive	16X/40X DVD-ROM Drive
	Hard Drive	18-GB Ultra320 SCSI (15,000 rpm)
	Graphics	Not included in base configuration – Please choose a graphics card option below: NVIDIA Quadro NVS 200 NVIDIA Quadro NVS 400 NVIDIA Quadro2 EX LP NVIDIA Quadro4 380XGL ATI FIRE GL 8800 ATI FIRE GL Z1-128p NVIDIA Quadro4 750 XGL NVIDIA Quadro4 980 XGL NVIDIA Quadro4 900 XGL 3DLabs Wildcat III 6110 ATI FIRE GL X1-256p NVIDIA Quadro FX2000 NOTE: Please see Part Numbers in After market options/Standalone accessories section.
	Mouse	HP 3-button mouse (PS/2)
	OS	Microsoft Windows 2000 Professional

X8X/2.66/18K/512/Xd 470047-001	Processor	Intel Xeon processor 2.66-GHz
	Cache Memory	512-KB integrated L2
	Memory	512MB (2x256-MB) PC2100 ECC registered DDR-266
	Optical Drive	DVD-ROM
	Hard Drive	18-GB Ultra320 SCSI (15,000 rpm)
	Graphics	Not included in base configuration – Please choose a graphics card option below: NVIDIA Quadro NVS 200 NVIDIA Quadro NVS 400 NVIDIA Quadro2 EX LP NVIDIA Quadro4 380XGL ATI FIRE GL 8800 ATI FIRE GL Z1-128p NVIDIA Quadro4 750 XGL NVIDIA Quadro4 980 XGL NVIDIA Quadro4 900 XGL 3DLabs Wildcat III 6110 ATI FIRE GL X1-256p NVIDIA Quadro FX2000 NOTE: Please see Part Numbers in After market options/Standalone accessories section.
	Mouse	HP 3-button mouse (PS/2)
	OS	Microsoft Windows XP Professional

Standard Features – Pre-configured Global Models

X8K/2.66/18K/512/Xr 470047-002	Processor	Intel Xeon processor 2.66-GHz	
	Cache Memory	512-KB integrated L2	
	Memory	512MB (2x256-MB) PC2100 ECC registered DDR-266	
	Optical Drive	CD-RW Drive	
	Hard Drive	18-GB Ultra320 SCSI (15,000 rpm)	
	Graphics	Not included in base configuration – Please choose a graphics card option below: NVIDIA Quadro NVS 200 NVIDIA Quadro NVS 400 NVIDIA Quadro2 EX LP NVIDIA Quadro4 380XGL ATI FIRE GL 8800 ATI FIRE GL Z1-128p NVIDIA Quadro4 750 XGL NVIDIA Quadro4 980 XGL NVIDIA Quadro4 900 XGL 3DLabs Wildcat III 6110 ATI FIRE GL X1-256p NVIDIA Quadro FX2000 NOTE: Please see Part Numbers in After market options/Standalone accessories section.	
	Mouse	HP 3-button mouse (PS/2)	
	OS	Microsoft Windows 2000 Professional	
	X8X/2.66/18K/512/Xr 470047-003	Processor	Intel Xeon processor 2.66-GHz
		Cache Memory	512-KB integrated L2
Memory		512MB (2x256-MB) PC2100 ECC registered DDR-266	
Optical Drive		CD-RW Drive	
Hard Drive		18-GB Ultra320 SCSI (15,000 rpm)	
Graphics		Not included in base configuration – Please choose a graphics card option below: NVIDIA Quadro NVS 200 NVIDIA Quadro NVS 400 NVIDIA Quadro2 EX LP NVIDIA Quadro4 380XGL ATI FIRE GL 8800 ATI FIRE GL Z1-128p NVIDIA Quadro4 750 XGL NVIDIA Quadro4 980 XGL NVIDIA Quadro4 900 XGL 3DLabs Wildcat III 6110 ATI FIRE GL X1-256p NVIDIA Quadro FX2000 NOTE: Please see Part Numbers in After market options/Standalone accessories section.	
Mouse		HP 3-button mouse (PS/2)	
OS		Microsoft Windows XP Professional	

Standard Features – Pre-configured Global Models

X8K/2.66/36S/512/Xc 470047-004	Processor	Intel Xeon processor 2.66-GHz	
	Cache Memory	512-KB integrated L2	
	Memory	512MB (2x256-MB) PC2100 ECC registered DDR-266	
	Optical Drive	CD-ROM	
	Hard Drive	36-GB Ultra320 SCSI (10,000 rpm)	
	Graphics	Not included in base configuration – Please choose a graphics card option below: NVIDIA Quadro NVS 200 NVIDIA Quadro NVS 400 NVIDIA Quadro2 EX LP NVIDIA Quadro4 380XGL ATI FIRE GL 8800 ATI FIRE GL Z1-128p NVIDIA Quadro4 750 XGL NVIDIA Quadro4 980 XGL NVIDIA Quadro4 900 XGL 3DLabs Wildcat III 6110 ATI FIRE GL X1-256p NVIDIA Quadro FX2000 NOTE: Please see Part Numbers in After market options/Standalone accessories section.	
	Mouse	HP 3-button mouse (PS/2)	
	OS	Microsoft Windows 2000 Professional	
	X8X/2.66/36S/512/Xc 470047-005	Processor	Intel Xeon processor 2.66-GHz
		Cache Memory	512-KB integrated L2
Memory		512MB (2x256-MB) PC2100 ECC registered DDR-266	
Optical Drive		CD-ROM	
Hard Drive		36-GB Ultra320 SCSI (10,000 rpm)	
Graphics		Not included in base configuration – Please choose a graphics card option below: NVIDIA Quadro NVS 200 NVIDIA Quadro NVS 400 NVIDIA Quadro2 EX LP NVIDIA Quadro4 380XGL ATI FIRE GL 8800 ATI FIRE GL Z1-128p NVIDIA Quadro4 750 XGL NVIDIA Quadro4 980 XGL NVIDIA Quadro4 900 XGL 3DLabs Wildcat III 6110 ATI FIRE GL X1-256p NVIDIA Quadro FX2000 NOTE: Please see Part Numbers in After market options/Standalone accessories section.	
Mouse		HP 3-button mouse (PS/2)	
OS		Microsoft Windows XP Professional	

Standard Features – Pre-configured Global Models

X8X/2.8/36S/512/Xd 470047-471	Processor	Intel Xeon processor 2.8-GHz
	Cache Memory	512-KB integrated L2
	Memory	512MB (2x256-MB) PC2100 ECC registered DDR-266
	Optical Drive	16X/40X DVD-ROM Drive
	Hard Drive	36-GB Ultra320 SCSI (10,000 rpm)
	Graphics	Not included in base configuration – Please choose a graphics card option below: NVIDIA Quadro NVS 200 NVIDIA Quadro NVS 400 NVIDIA Quadro2 EX LP NVIDIA Quadro4 380XGL ATI FIRE GL 8800 ATI FIRE GL Z1-128p NVIDIA Quadro4 750 XGL NVIDIA Quadro4 980 XGL NVIDIA Quadro4 900 XGL 3DLabs Wildcat III 6110 ATI FIRE GL X1-256p NVIDIA Quadro FX2000 NOTE: Please see Part Numbers in After market options/Standalone accessories section.
	Mouse	HP 3-button mouse (PS/2)
	OS	Microsoft Windows XP Professional

X8K/2.8/18K/512/Xd 470047-019	Processor	Intel Xeon processor 2.8-GHz
	Cache Memory	512-KB integrated L2
	Memory	512MB (2x256-MB) PC2100 ECC registered DDR-266
	Optical Drive	16X/40X DVD-ROM Drive
	Hard Drive	18-GB Ultra320 SCSI (15,000 rpm)
	Graphics	Not included in base configuration – Please choose a graphics card option below: NVIDIA Quadro NVS 200 NVIDIA Quadro NVS 400 NVIDIA Quadro2 EX LP NVIDIA Quadro4 380XGL ATI FIRE GL 8800 ATI FIRE GL Z1-128p NVIDIA Quadro4 750 XGL NVIDIA Quadro4 980 XGL NVIDIA Quadro4 900 XGL 3DLabs Wildcat III 6110 ATI FIRE GL X1-256p NVIDIA Quadro FX2000 NOTE: Please see Part Numbers in After market options/Standalone accessories section.
	Mouse	HP 3-button mouse (PS/2)
	OS	Microsoft Windows 2000 Professional

Standard Features – Pre-configured Global Models

X8X/2.8/18K/512/Xd 470047-020	Processor	Intel Xeon processor 2.8-GHz
	Cache Memory	512-KB integrated L2
	Memory	512MB (2x256-MB) PC2100 ECC registered DDR-266
	Optical Drive	16X/40X DVD-ROM Drive
	Hard Drive	18-GB Ultra320 SCSI (15,000 rpm)
	Graphics	Not included in base configuration – Please choose a graphics card option below: NVIDIA Quadro NVS 200 NVIDIA Quadro NVS 400 NVIDIA Quadro2 EX LP NVIDIA Quadro4 380XGL ATI FIRE GL 8800 ATI FIRE GL Z1-128p NVIDIA Quadro4 750 XGL NVIDIA Quadro4 980 XGL NVIDIA Quadro4 900 XGL 3DLabs Wildcat III 6110 ATI FIRE GL X1-256p NVIDIA Quadro FX2000 NOTE: Please see Part Numbers in After market options/Standalone accessories section.
	Mouse	HP 3-button mouse (PS/2)
	OS	Microsoft Windows XP Professional

X8K/2.8+/18K/1/Xr 470047-021	Processor	2 Intel Xeon processors 2.8-GHz
	Cache Memory	512-KB integrated L2
	Memory	1GB (2x512-MB) PC2100 ECC registered DDR-266
	Optical Drive	CD-RW Drive
	Hard Drive	18-GB Ultra320 SCSI (15,000 rpm)
	Graphics	Not included in base configuration – Please choose a graphics card option below: NVIDIA Quadro NVS 200 NVIDIA Quadro NVS 400 NVIDIA Quadro2 EX LP NVIDIA Quadro4 380XGL ATI FIRE GL 8800 ATI FIRE GL Z1-128p NVIDIA Quadro4 750 XGL NVIDIA Quadro4 980 XGL NVIDIA Quadro4 900 XGL 3DLabs Wildcat III 6110 ATI FIRE GL X1-256p NVIDIA Quadro FX2000 NOTE: Please see Part Numbers in After market options/Standalone accessories section.
	Mouse	HP 3-button mouse (PS/2)
	OS	Microsoft Windows 2000 Professional

Standard Features – Pre-configured Global Models

X8X/2.8+18K/1/Xr 470047-022	Processor	2 Intel Xeon processors 2.8-GHz
	Cache Memory	512-KB integrated L2
	Memory	1GB (2x512-MB) PC2100 ECC registered DDR-266
	Optical Drive	CD-RW Drive
	Hard Drive	18-GB Ultra320 SCSI (15,000 rpm)
	Graphics	Not included in base configuration – Please choose a graphics card option below: NVIDIA Quadro NVS 200 NVIDIA Quadro NVS 400 NVIDIA Quadro2 EX LP NVIDIA Quadro4 380XGL ATI FIRE GL 8800 ATI FIRE GL Z1-128p NVIDIA Quadro4 750 XGL NVIDIA Quadro4 980 XGL NVIDIA Quadro4 900 XGL 3DLabs Wildcat III 6110 ATI FIRE GL X1-256p NVIDIA Quadro FX2000 NOTE: Please see Part Numbers in After market options/Standalone accessories section.
	Mouse	HP 3-button mouse (PS/2)
	OS	Microsoft Windows XP Professional

X8X/2.8/36S/512/Xc 470047-023	Processor	Intel Xeon processor 2.8-GHz
	Cache Memory	512-KB integrated L2
	Memory	512MB (2x256-MB) PC2100 ECC registered DDR-266
	Optical Drive	CD-ROM
	Hard Drive	36-GB Ultra320 SCSI (10,000 rpm)
	Graphics	Not included in base configuration – Please choose a graphics card option below: NVIDIA Quadro NVS 200 NVIDIA Quadro NVS 400 NVIDIA Quadro2 EX LP NVIDIA Quadro4 380XGL ATI FIRE GL 8800 ATI FIRE GL Z1-128p NVIDIA Quadro4 750 XGL NVIDIA Quadro4 980 XGL NVIDIA Quadro4 900 XGL 3DLabs Wildcat III 6110 ATI FIRE GL X1-256p NVIDIA Quadro FX2000 NOTE: Please see Part Numbers in After market options/Standalone accessories section.
	Mouse	HP 3-button mouse (PS/2)
	OS	Microsoft Windows XP Professional

Standard Features – Pre-configured Global Models

X8K/2.8/36S/512/Xc 470047-024	Processor	Intel Xeon processor 2.8-GHz	
	Cache Memory	512-KB integrated L2	
	Memory	512MB (2x256-MB) PC2100 ECC registered DDR-266	
	Optical Drive	CD-ROM	
	Hard Drive	36-GB Ultra320 SCSI (10,000 rpm)	
	Graphics	Not included in base configuration – Please choose a graphics card option below: NVIDIA Quadro NVS 200 NVIDIA Quadro NVS 400 NVIDIA Quadro2 EX LP NVIDIA Quadro4 380XGL ATI FIRE GL 8800 ATI FIRE GL Z1-128p NVIDIA Quadro4 750 XGL NVIDIA Quadro4 980 XGL NVIDIA Quadro4 900 XGL 3DLabs Wildcat III 6110 ATI FIRE GL X1-256p NVIDIA Quadro FX2000 NOTE: Please see Part Numbers in After market options/Standalone accessories section.	
	Mouse	HP 3-button mouse (PS/2)	
	OS	Microsoft Windows 2000 Professional	
	X8X/3.06/36S/512/Xd 470054-343	Processor	Intel Xeon processor 3.06-GHz
		Cache Memory	512-KB integrated L2
Memory		512MB (2x256-MB) PC2100 ECC registered DDR-266	
Optical Drive		16X/40X DVD-ROM Drive	
Hard Drive		36-GB Ultra320 SCSI (10,000 rpm)	
Graphics		Not included in base configuration – Please choose a graphics card option below: NVIDIA Quadro NVS 200 NVIDIA Quadro NVS 400 NVIDIA Quadro2 EX LP NVIDIA Quadro4 380XGL ATI FIRE GL 8800 ATI FIRE GL Z1-128p NVIDIA Quadro4 750 XGL NVIDIA Quadro4 980 XGL NVIDIA Quadro4 900 XGL 3DLabs Wildcat III 6110 ATI FIRE GL X1-256p NVIDIA Quadro FX2000 NOTE: Please see Part Numbers in After market options/Standalone accessories section.	
Mouse		HP 3-button mouse (PS/2)	
OS		Microsoft XP Professional	

Standard Features – Pre-configured Global Models

X8K/3.06/18K/1/Xd 470056-556	Processor	Intel Xeon processor 3.06-GHz
	Cache Memory	512-KB integrated L2
	Memory	1-GB (2x512-MB) PC2100 ECC registered DDR-266
	Optical Drive	16X/40X DVD-ROM Drive
	Hard Drive	18-GB Ultra320 SCSI (15,000 rpm)
	Graphics	Not included in base configuration – Please choose a graphics card option below: NVIDIA Quadro NVS 200 NVIDIA Quadro NVS 400 NVIDIA Quadro2 EX LP NVIDIA Quadro4 380XGL ATI FIRE GL 8800 ATI FIRE GL Z1-128p NVIDIA Quadro4 750 XGL NVIDIA Quadro4 980 XGL NVIDIA Quadro4 900 XGL 3DLabs Wildcat III 6110 ATI FIRE GL X1-256p NVIDIA Quadro FX2000 NOTE: Please see Part Numbers in After market options/Standalone accessories section.
	Mouse	HP 3-button mouse (PS/2)
	OS	Microsoft Windows 2000 Professional

X8X/3.06/18K/1/Xd 470056-557	Processor	Intel Xeon processor 3.06-GHz
	Cache Memory	512-KB integrated L2
	Memory	1-GB (2x512-MB) PC2100 ECC registered DDR-266
	Optical Drive	16X/40X DVD-ROM Drive
	Hard Drive	18-GB Ultra320 SCSI (15,000 rpm)
	Graphics	Not included in base configuration – Please choose a graphics card option below: NVIDIA Quadro NVS 200 NVIDIA Quadro NVS 400 NVIDIA Quadro2 EX LP NVIDIA Quadro4 380XGL ATI FIRE GL 8800 ATI FIRE GL Z1-128p NVIDIA Quadro4 750 XGL NVIDIA Quadro4 980 XGL NVIDIA Quadro4 900 XGL 3DLabs Wildcat III 6110 ATI FIRE GL X1-256p NVIDIA Quadro FX2000 NOTE: Please see Part Numbers in After market options/Standalone accessories section.
	Mouse	HP 3-button mouse (PS/2)
	OS	Microsoft Windows XP Professional

Standard Features – Pre-configured Global Models

X8K/3.06+/18K/1/Xr 470056-559	Processor	2 Intel Xeon processor 3.06-GHz	
	Cache Memory	512-KB integrated L2	
	Memory	1-GB (2x512-MB) PC2100 ECC registered DDR-266	
	Optical Drive	CD-RW Drive	
	Hard Drive	18-GB Ultra320 SCSI (15,000 rpm)	
	Graphics	Not included in base configuration – Please choose a graphics card option below: NVIDIA Quadro NVS 200 NVIDIA Quadro NVS 400 NVIDIA Quadro2 EX LP NVIDIA Quadro4 380XGL ATI FIRE GL 8800 ATI FIRE GL Z1-128p NVIDIA Quadro4 750 XGL NVIDIA Quadro4 980 XGL NVIDIA Quadro4 900 XGL 3DLabs Wildcat III 6110 ATI FIRE GL X1-256p NVIDIA Quadro FX2000 NOTE: Please see Part Numbers in After market options/Standalone accessories section.	
	Mouse	HP 3-button mouse (PS/2)	
	OS	Microsoft Windows 2000 Professional	
	X8X/3.06+/18K/1/Xr 470056-560	Processor	2 Intel Xeon processor 3.06-GHz
		Cache Memory	512-KB integrated L2
Memory		1-GB (2x512-MB) PC2100 ECC registered DDR-266	
Optical Drive		CD-RW Drive	
Hard Drive		18-GB Ultra320 SCSI (15,000 rpm)	
Graphics		Not included in base configuration – Please choose a graphics card option below: NVIDIA Quadro NVS 200 NVIDIA Quadro NVS 400 NVIDIA Quadro2 EX LP NVIDIA Quadro4 380XGL ATI FIRE GL 8800 ATI FIRE GL Z1-128p NVIDIA Quadro4 750 XGL NVIDIA Quadro4 980 XGL NVIDIA Quadro4 900 XGL 3DLabs Wildcat III 6110 ATI FIRE GL X1-256p NVIDIA Quadro FX2000 NOTE: Please see Part Numbers in After market options/Standalone accessories section.	
Mouse		HP 3-button mouse (PS/2)	
OS		Microsoft Windows XP Professional	

Standard Features – Pre-configured Global Models

X8K/3.06+/18K/1/Xr 470056-560	Processor	2 Intel Xeon processor 3.06-GHz	
	Cache Memory	512-KB integrated L2	
	Memory	1-GB (2x512-MB) PC2100 ECC registered DDR-266	
	Optical Drive	CD-RW Drive	
	Hard Drive	18-GB Ultra320 SCSI (15,000 rpm)	
	Graphics	<p>Not included in base configuration – Please choose a graphics card option below:</p> NVIDIA Quadro NVS 200 NVIDIA Quadro NVS 400 NVIDIA Quadro2 EX LP NVIDIA Quadro4 380XGL ATI FIRE GL 8800 ATI FIRE GL Z1-128p NVIDIA Quadro4 750 XGL NVIDIA Quadro4 980 XGL NVIDIA Quadro4 900 XGL 3DLabs Wildcat III 6110 ATI FIRE GL X1-256p NVIDIA Quadro FX2000	
	Mouse	HP 3-button mouse (PS/2)	
	OS	Microsoft Windows 2000 Professional	
	X8X/3.06/36S/512/Xc 470056-561	Processor	Intel Xeon processor 3.06-GHz
		Cache Memory	512-KB integrated L2
Memory		512-MB (2x256-MB) PC2100 ECC registered DDR-266	
Optical Drive		CD-ROM Drive	
Hard Drive		36-GB Ultra320 SCSI (10,000 rpm)	
Graphics		<p>Not included in base configuration – Please choose a graphics card option below:</p> NVIDIA Quadro NVS 200 NVIDIA Quadro NVS 400 NVIDIA Quadro2 EX LP NVIDIA Quadro4 380XGL ATI FIRE GL 8800 ATI FIRE GL Z1-128p NVIDIA Quadro4 750 XGL NVIDIA Quadro4 980 XGL NVIDIA Quadro4 900 XGL 3DLabs Wildcat III 6110 ATI FIRE GL X1-256p NVIDIA Quadro FX2000	
Mouse		HP 3-button mouse (PS/2)	
OS		Microsoft Windows XP Professional	

Standard Features – Pre-configured Global Models

X8K/3.06/36S/512/Xc 470056-562	Processor	Intel Xeon processor 3.06-GHz
	Cache Memory	512-KB integrated L2
	Memory	512-MB (2x256-MB) PC2100 ECC registered DDR-266
	Optical Drive	CD-ROM Drive
	Hard Drive	36-GB Ultra320 SCSI (10,000 rpm)
	Graphics	Not included in base configuration – Please choose a graphics card option below: NVIDIA Quadro NVS 200 NVIDIA Quadro NVS 400 NVIDIA Quadro2 EX LP NVIDIA Quadro4 380XGL ATI FIRE GL 8800 ATI FIRE GL Z1-128p NVIDIA Quadro4 750 XGL NVIDIA Quadro4 980 XGL NVIDIA Quadro4 900 XGL 3DLabs Wildcat III 6110 ATI FIRE GL X1-256p NVIDIA Quadro FX2000
	Mouse	NOTE: Please see Part Numbers in After market options/Standalone accessories section. HP 3-button mouse (PS/2)
	OS	Microsoft Windows 2000 Professional

Configure-to-order options

When buying a system, you have many configuration options.

Processor	Intel Xeon processor 2.4-GHz, 512-KB cache, 533-MHz front side bus
	Intel Xeon processor 2.66-GHz, 512-KB cache, 533-MHz front side bus
	Intel Xeon processor 2.8-GHz, 512-KB cache, 533-MHz front side bus
	Intel Xeon processor 3.06-GHz, 512-KB cache, 533-MHz front side bus
	2 nd Xeon processor 2.4-GHz, 512-KB cache, 533-MHz front side bus
	2 nd Xeon processor 2.66-GHz, 512-KB cache, 533-MHz front side bus
	2 nd Xeon processor 2.8-GHz, 512-KB cache, 533-MHz front side bus
	2 nd Xeon processor 3.06-GHz, 512-KB cache, 533-MHz front side bus
NOTE: When adding an additional processor, both processors must have the same speed and cache size.	

Memory (DDR-SDRAM)	128-MB PC2100 ECC registered DDR-266
	256-MB PC2100 ECC registered DDR-266
	512-MB PC2100 ECC registered DDR-266
	1-GB PC2100 ECC registered DDR-266
	1.5-GB PC2100 ECC registered DDR-266
	2-GB PC2100 ECC registered DDR-266
	3-GB PC2100 ECC registered DDR-266
	4-GB PC2100 ECC registered DDR-266

Monitors	HP L1825 Flat Panel Color Monitor (18-inch, Carbon/Silver)
	HP L1925 Flat Panel Color Monitor (19-inch, Carbon/Silver)
	HP L2025 Flat Panel Color Monitor (20-inch, Carbon/Silver)
	HP p930 Flat screen CRT Monitor (19-inch, Carbon/Silver)
	HP p1130 Flat screen CRT Monitor (21-inch, Carbon/Silver)

Graphics	NVIDIA Quadro NVS 200 (AGP)
	NVIDIA Quadro NVS 400 (AGP)
	NVIDIA Quadro2 EX (AGP)
	NVIDIA Quadro4 380XGL (AGP)
	ATI FIRE GL 8800 (AGP)
	ATI FIRE GL Z1-128p (AGP)
	NVIDIA Quadro4 750 XGL (AGP)
	NVIDIA Quadro4 980 XGL (AGP)
	NVIDIA Quadro4 900 XGL (AGP)
	3DLabs Wildcat III 6110
	ATI FIRE GL X1-256p (AGP)
	NVIDIA Quadro FX2000 (AGP)

Primary hard disks	40-GB Ultra ATA/100 EIDE (7,200 rpm)
	80-GB Ultra ATA/100 EIDE (7,200 rpm)
	120-GB Ultra ATA/100 EIDE (7,200 rpm)
	36-GB Ultra320 SCSI (10,000 rpm)
	73-GB Ultra320 SCSI (10,000 rpm)
	146-GB Ultra320 SCSI (10,000 rpm)
	18-GB Ultra320 SCSI (15,000 rpm)
	36-GB Ultra320 SCSI (15,000 rpm)
73-GB Ultra320 SCSI (15,000 rpm)	

Configure-to-order options

Secondary hard disks	40-GB Ultra ATA/100 EIDE (7,200 rpm)
	80-GB Ultra ATA/100 EIDE (7,200 rpm)
	120-GB Ultra ATA/100 EIDE (7,200 rpm)
	36-GB Ultra320 SCSI (10,000 rpm)
	73-GB Ultra320 SCSI (10,000 rpm)
	146-GB Ultra320 SCSI (10,000 rpm)
	18-GB Ultra320 SCSI (15,000 rpm)
	36-GB Ultra320 SCSI (15,000 rpm)
73-GB Ultra320 SCSI (15,000 rpm)	
Third hard disks (SCSI only)	36-GB Ultra320 SCSI (10,000 rpm)
	73-GB Ultra320 SCSI (10,000 rpm)
	146-GB Ultra320 SCSI (10,000 rpm)
	18-GB Ultra320 SCSI (15,000 rpm)
	36-GB Ultra320 SCSI (15,000 rpm)
	73-GB Ultra320 SCSI (15,000 rpm)
Optical Drives	48X CD-ROM
	48X CD-RW
	16X DVD-ROM
	48X CD-RW/DVD-ROM combo
	4.7GB DVD+RW
Input devices	Easy Access Keyboard (PS/2)
	3-Button Mouse (PS/2)
	Scroll Mouse (PS/2)
External SCSI connector	Ultra320 SCSI back panel connect on chassis (2nd channel of dual-channel Ultra320)
Operating System	Windows XP Professional preloaded; incl. Windows XP recovery CD
	Windows 2000 Professional SP3 preloaded; incl. Windows 2000 recovery CD

After-market options/Standalone accessories

2nd Processor	Intel Xeon processor 2.4-GHz, 512-KB cache, 533-MHz front side bus	310485-B21
	Intel Xeon processor 2.66-GHz, 512-KB cache, 533-MHz front side bus	310486-B21
	Intel Xeon processor 2.8-Hz, 512-KB cache, 533-MHz front side bus	310487-B21
	Intel Xeon processor 3.06-Hz, 512-KB cache, 533-MHz front side bus	AA849A
NOTE: When adding an additional processor, both processors must have the same speed and cache size.		
Memory	128 MB PC2100 ECC registered DDR-266	310478-B21
	256 MB PC2100 ECC registered DDR-266	310479-B21
	512 MB PC2100 ECC registered DDR-266	310480-B21
	1 GB PC2100 ECC registered DDR-266	310481-B21
	2 GB PC2100 ECC registered DDR-266	313305-B21
Graphics	NVIDIA Quadro NVS 200 (AGP)	273304-B21
	NVIDIA Quadro NVS 200 DVI Cables	284281-B21
	NVIDIA Quadro NVS 400 (AGP)	273305-B21
	NVIDIA Quadro2 EX LP (AGP)	250066-B21
	NVIDIA Quadro4 380XGL (AGP)	310477-B21
	ATI FIRE GL 8800 (AGP)	314650-B21
	ATI FIRE GL Z1-128p (AGP)	AA624A
	NVIDIA Quadro4 980 XGL (AGP)	310517-B21
	3DLabs Wildcat III 6110 (AGP)	271685-B21
	ATI FIRE GL X1-256p(AGP)	310519-B21
	NVIDIA Quadro FX2000	DE806A
Hard Drives	Ultra320 SCSI Drives	
	36-GB Ultra320 SCSI (10,000 rpm)	310503-B21
	73-GB Ultra320 SCSI (10,000 rpm)	310504-B21
	146-GB Ultra320 SCSI (10,000 rpm)	310505-B21
	18-GB Ultra320 SCSI (15,000 rpm)	310506-B21
	36-GB Ultra320 SCSI (15,000 rpm)	310507-B21
	73-GB Ultra320 SCSI (15,000 rpm)	310508-B21
	Ultra ATA Drives	
	40-GB Ultra ATA/100 EIDE (7,200 rpm)	310498-B21
	80-GB Ultra ATA/100 EIDE (7,200 rpm)	310499-B21
	120-GB Ultra ATA/100 EIDE (7,200 rpm)	310500-B21
	160-GB Ultra ATA/100 EIDE (7,200 rpm)	DE204A
	Optical Drives	48x CD-ROM Drive
48X/24X/48X CD-RW		DE205A
16X DVD-ROM Drive		311963-B21
48X CD-RW/DVD-ROM Drive		DE206A
4.7GB DVD+R/RW Drive – 300i		AA851A

After-market options/Standalone accessories

Storage Controllers	Ultra320 Dual Channel SCSI Controller Card (PCI)	310502-B21
	Ultra320 SCSI back panel connect on chassis (2nd channel of dual-channel U320)	310482-B21
	Adaptec SCSI RAID 2120S Card	AA850A
	5-device SCSI cable	312205-B21
Rack options	StorageWorks Enclosure 4314R	190209-001
	Rack mounting kits	308288-B21
	Fixed shelf kit	253449-B21
	Sliding Shelf Kit	234672-B21
	Depth Adjustable Rails	332558-B21
Backup Devices	Exabyte 33/66-GB VXA-1 IDE Tape Drive	237109-B22
	Exabyte 33/66-GB VXA-1 SCSI Tape Drive	237108-B22
	TR5 10/20-GB iTape Drive (IDE, carbon)	294243-B22
	Imagemaster ZIP 250-MB (internal, IDE, carbon)*	294416-B22
Communications	Intel Pro/100+ 10/100 PCI card	310483-B21
	Intel Pro/1000 XT Server Adapter Gigabit PCI card	310484-B21
	Intel Pro 1000 MT NIC	DC193A
	V90 56K PCI WIN Modem	239137-xxx
	V90 56K International Soft WIN Modem*	259032-B24
Input devices	PS/2 Easy Access keyboard (carbon/silver)	267145-xx5
	Three button mouse-carbon (PS2)	269192-B24
	Scroll Mouse-Carbon (PS2)	170299-B23
	Spaceball 4000	112138-B23
	Spaceball 5000	DE934A
	USB optical mouse (carbon/silver)	265985-B21
	USB scroll mouse (carbon)	195255-B25
	Mercury wireless keyboard with wireless optical mouse	300403-xx8
Security	USB Fingerprint Identification	240238-B21
	USB SmartCard Keyboard	267147-008
	Corvadis USB Enhanced SmartCard Reader	240154-B21
Monitors	HP L1825 Flat Panel Color Monitor (18-inch, Carbon/Silver)	303486-003
	HP L1925 flat panel color monitor (19-inch, carbon/silver)	P9626A
	HP L2025 Flat Panel Color Monitor (20-inch, Carbon/Silver)	303102-003
	HP p930 Flat screen CRT Monitor (19-inch, Carbon/Silver)	302268-003
	HP p1130 Flat screen CRT Monitor (21-inch, Carbon/Silver)	302270-003

Memory


STANDARD MEMORY

This system supports PC-2100 DDR-266 DDR-SDRAM ECC. The mainboard is based on the E7505 chipset and has 6 DIMM slots with dual memory channels (4.2 GB/s throughput). It ships with 512-MB as standard. It can support a maximum of 12-GB of RAM when optional memory upgrades are included. Memory must be installed in like pairs. Only 266-MHz memory speed is supported.

Following are memory options available from HP:

- | | |
|--|------------|
| • 128 MB upgrade kit PC2100 ECC registered DDR-266 | 310478-B21 |
| • 256 MB upgrade kit PC2100 ECC registered DDR-266 | 310479-B21 |
| • 512 MB upgrade kit PC2100 ECC registered DDR-266 | 310480-B21 |
| • 1 GB upgrade kit PC2100 ECC registered DDR-266 | 310481-B21 |
| • 2 GB upgrade kit PC2100 ECC registered DDR-266 | 313305-B21 |

Storage

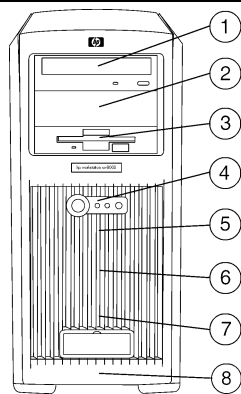

DRIVE SUPPORT

	Quantity Supported	Position Supported	Controller
Removable Media			
1.44-MB Diskette Drive	Up to 1	3	Integrated
Optical Drives			
Up to 2 total		1, 2	Integrated Ultra ATA/100
CD-ROM Drive		1, 2	Integrated Ultra ATA/100
DVD-ROM Drive		1, 2	Integrated Ultra ATA/100
CD-RW Drive		1, 2	Integrated Ultra ATA/100
16x CD-RW/DVD-ROM		1, 2	Integrated Ultra ATA/100
DVD+RW		1, 2	Integrated Ultra ATA/100
Hard Drives			
<i>Ultra320 SCSI Drives</i>			
1-inch	Up to 5	4, 5, 6, 7, 8	Integrated dual channel Ultra320 SCSI controller
146-GB 10,000 rpm			
73-GB 15,000 rpm			
73-GB 10,000 rpm			
36-GB 15,000 rpm			
36-GB 10,000 rpm			
18-GB 15,000 rpm			
<i>Ultra ATA Drives</i>			
1-inch	Up to 2	5, 6	Integrated Ultra ATA/100 controller
160-GB 7200 rpm			
120-GB 7200 rpm			
80-GB 7200 rpm			
40-GB 7200 rpm			
Maximum Storage Capacity			
Internal	730-GB SCSI (assumes 5 SCSI drives installed) 320-GB Ultra ATA		

Technical Specifications

System Unit	Tower Dimensions (HxWxD)	17.7 x 8.3 x 20.30 in/44.9 x 21.0 x 51.5 cm		
	Weight (standard configuration)	40 lb/18 kg		
	Power Supply	Operating Voltage Range	100 VAC to 240 VAC	
		Rated Voltage Range	100- VAC to 120 VAC; 200 VAC to 240 VAC	
		Rated Line Frequency	50 Hz to 60 Hz	
		Rated Input Current	6.4A @ 100 VAC; 3.2A @ 240 VAC	
		Maximum Rated Power	692-Watt input, 450-Watt output	
		Physical Dimensions (HxWxD)	3.85 x 6.3 x 7.35 in/9.78 x 16 x 18.67 cm	
		Weight	<5.7 lb; <2.6 kg	
	Temperature (Values are subject to change)	Operating	50° to 95°F/10° to 35 °C	
		Non-operating	-40° to 158°F/-40° to 70 °C	
Humidity (non-condensing) (Values are subject to change)	Operating	15% to 80%		
	Non-operating	10% to 90%		
Maximum Altitude (nonpressurized)	Operating	10,000 ft/3048 m		
	Storage	15,000 ft/4600 m		
HP Easy Access Keyboard	Dimensions (HxWxD)	18.3 x 6.3 x 1.4 in/46.5 x 16 x 3.6 cm		
	Weight	Approximately 2 lb/0.9 kg	Approximately 2 lb/0.9 kg	
	Electrical	Operating Voltage	+5VDC ± 5%	
		Power Consumption	50 mA maximum (with 3 LEDs on)	
		System Interface	PS/2 mini-din connector	
		ESD	CE level 4, 15 kV air discharge	
		EMI-RFI	Conforms to FCC rules for a Class B computing device	
		PC98	Functionally compliant	
	Mechanical	Languages	18 available	
		Keycaps	Low-profile design	
		Switch Actuation	55 g nominal peak force with tactile feedback	
		Switch Life	20 million keystrokes (using Hasco modified tester)	
		Switch Type	Contamination resistant membrane	
		Key Leveling Mechanism	For all double wide and greater length keys	
		Cable Length	6 ft/1.8 m	
		PC98-99	Mechanically compliant	
		Acoustics	50 dBA maximum sound pressure level	
	Environmental	Operating Temperature	50° to 122° F/10° to 50° C	
		Non-operating Temperature	-22° to 140° F/-30° to 60° C	
Operating Humidity		10% to 90% (non condensing at ambient)		
Non-operating Humidity		20% to 80% (non condensing at ambient)		
Operating Shock		40 g, 6 surfaces		
Non-operating Shock		80 g, 6 surfaces		
Operating Vibration		2 g peak acceleration		
Non-operating Vibration		50° to 122° F/10° to 50° C		

Technical Specifications

1.44 MB Diskette Drive	Diskette Size	3.5 in		
	LED Indicators (front panel)	Green		
	Read/Write Capacity per Diskette (high/low)	1.44 MB/720 KB		
	Drive Height	One-third		
	Drive Rotation	300 rpm		
	Transfer Rate (high/low)	500/250 Kb/s		
	Bytes/Sector	512		
	Sectors/Track (high/low)	18/9		
	Tracks/Side (high/low)	80/80		
	Access Times	Track-to-Track (high/low)	3/6 ms	
		Average (high/low)	94/173 ms	
		Settling Time	15 ms	
		Latency Average	100 ms	
Cylinders (high/low)	80/80			
Read/Write Heads	Two			
HP 3-Button Mouse	Dimensions/Weight	Height	1.42 in/3.6 cm	
		Length	4.17 in/10.7 cm	
		Width	2.87 in/7.4 cm	
		Weight	5.20 oz/150 g	
	Environmental	Operating Temperature	32° to 104° F/0°C to 40° C	
		Non-operating Temperature	-4° to 140° F/-20° to 60°C	
		Operating Humidity	10% to 90% (non condensing at ambient)	
	Mechanical	Resolution	400 ± 20% DPI	
		Tracking Speed	10 in/s Maximum	
		Switch Life	1,000,000 operations (using Hasco modified tester)	
		Switch Type	Micro-switches	
		Tracking Mechanism Life	155 miles/250 km at average speed of 10 in/s	
		Cable Length	6 ft/1.8 m	
		PC98-99	Mechanically compliant	
	Regulatory Approvals	Compliant	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick	

Technical Specifications

HP 2-button scroll mouse	Scroll Wheel	8 mm	
	Maximum Rotation Speed	30 mm/s	
	Switch Type	Light force micro-switch	
	Switch Life	1 million operations	
	Mechanical Life	Minimum 200,000 revolutions	
	Environmental	Operating Temperature	50° to 122° F/10° to 50° C
		Non-operating Temperature	-22° to 140° F/-30° to 60° C
		Operating Humidity	10% to 90% (non condensing at ambient)
		Non-operating Humidity	20% to 80% (non condensing at ambient)
		Operating Shock	40 g, 6 surfaces
		Non-operating Shock	80 g, 6 surfaces
		Operating Vibration	2 g peak acceleration
		Non-operating Vibration	4 g peak acceleration
	Electrical	Operating Voltage	+5VDC ± 10%
		Power Consumption	15mA
		System Consumption	PS/2 mini-din connector
		ESD	CE level 4, 15 kV air discharge
		EMI-RFI	Conforms to FCC rules for a Class B computing device
		PC98	Functionally compliant
	Mechanical	Resolution	400 ± 20% DPI
Tracking Speed		10 in/s maximum	
Acceleration		100 in/s	
Switch Actuation		85 g nominal peak force	
Switch Life		1,000,000 operations (using Hasco modified tester)	
Cable Length		2 m	
PC98-99		Mechanically compliant	
Regulatory approvals	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BCIQ, C -Tick		
SpaceBall 4000	Features	Six degrees of freedom motion control through the X, Y, Z axis (pitch, roll, yaw) Certified for leading CAD and DCC applications	
	Dimensions/Weight	Height	3.0 in/7.6 cm
		Length	8.4 in/21.3 cm
		Width	6.0 in/15.2 cm
		Weight	1.4 lb/0.64 kg
	Mechanical	Force range	0.5 - 8.2N (1.8 – 29.5 oz)
		Torque range	6.91 Nmm (0.085 – 0.33 oz-in.)
		Resolution	10-bits
	Serial Specifications	Connector	9-pin D-subminiature receptacle (DB9S)
		Cable Length	Approx. 3.9m (12.8 ft) captive
		Data rate	9600 bps
		Flow control	Xon/Xoff
	Regulatory Approvals	Compliant	UL, cUL, EN 950, EN 60950, CSA, FCC, CE Mark, TUV, CISPR 22, EN 50082, IEC 1000 4-2, IEC 1000-4-3, AS/NZS, VCCI, BSMI, C-Tick

Technical Specifications

SpaceBall 5000	Features	Six degrees of freedom motion control through the X, Y, Z axis (pitch, roll, yaw)		
	Ball Diameter	2.2 in (5.6 cm)		
	Dimensions/Weight	Height	3.0 in/7.6 cm	
		Length	6.0 in/15.2 cm	
		Width	8.4 in/21.3 cm	
		Weight	2.1 lbs (9.94 kg)	
	Environmental	Operating Temperature	50° to 104° F (10° to 40° C)	
		Non-operating Temperature	43° to 140° F (6° to 60° C)	
		Operating Humidity	8% to 80% (non-condensing at ambient)	
		Non-operating Humidity	5% to 80% (non-condensing at ambient)	
	Mechanical	Force range	0.5 - 8.2N / 1.8 – 29.5 oz	
Torque range		0.085 – 0.33 oz-in. (6.91 Nmm)		
Resolution		10 bits		
Serial Specifications	Connector	9-pin D-subminiature receptacle (DB9S)		
	Cable Length	12.8 ft. (3.9 m)		
	Data rate	9600 bps		
	Flow control	Xon/Xoff		
Regulatory Approvals	Compliant	UL, cUL, EN 950, EN 60950, CSA, FCC, CE Mark, TUV, CISPR 22, EN 50082, IEC 1000 4-2, IEC 1000-4-3, AS/NZS, VCCI, BSMI, C-Tick		

Technical Specifications

Adaptec SCSI RAID 2120S Card	Dimensions (H x D)	2.5in x 6.6in (6.4cm x 16.8cm) Low profile card
	RAID level	0, 1, 10, 5, JBOD
	Data Transfer Rate	Up to 320 MB/s
	Cache Memory	64 MB (onboard)
	Device Support	Up to 15 SCSI devices
	Bus Type	64-bit/66MHz PCI (Also support 32-bit/33MHz PCI)
	Internal Connectors	One 68-pin high-density
	External Connectors	One 68-pin VHDCI
	System Requirements	Intel PC or equivalent with available PCI slot
	Operating Temperature	0° C to 55° C
	Power Requirements	4 amps @ +5V
	Operating System Support	Windows 2000 Professional, Windows XP Professional
	Other	Optimized disk utilization Online RAID Level Migration Online capacity expansion Immediate RAID availability (background initialization) S.M.A.R.T. support

Ultra320 SCSI Hard Drives	146 GB, 10K	Capacity	146,815,737,856 bytes	
		Height	1 in/2.54 cm	
	Width	3.5 in/8.89 cm		
	Interface	Ultra320 SCSI 68-pin		
	Synchronous Transfer Rate (Maximum)	320 MB/s		
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.55 ms	
		Average	4.9 ms	
		Full-Stroke	9.20 ms	
	Rotational Speed	10,000 rpm		
	Logical Blocks	286,749,488		
	Operating Temperature	41° to 131° F/5° to 55°C		
	73 GB, 15K	Capacity	73,407,865,856 bytes	
		Height	1 in/2.54 cm	
		Width	4 in/10.16 cm	
Interface		Ultra320 SCSI 68-pin		
Synchronous Transfer Rate (Maximum)		320 MB/s		
Seek Time (typical reads, includes controller overhead, including settling)		Single Track	0.4 ms	
		Average	3.8 ms	
		Full-Stroke	6.7 ms	
Rotational Speed		15,000 rpm		
Logical Blocks		143,374,738		
Operating Temperature	41° to 131° F/5° to 55°C			

Technical Specifications

Ultra320 SCSI Hard Drives (continued)	73 GB, 10K	Capacity	73,407,865,856 bytes		
		Height	1 in/2.54 cm		
		Width	3.5 in/8.89 cm		
		Interface	Ultra320 SCSI 68-pin		
		Synchronous Transfer Rate (Maximum)	320 MB/s		
		Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.55 ms	
			Average	4.90 ms	
			Full-Stroke	9.20 ms	
		Rotational Speed	10,000 rpm		
		Logical Blocks	143,374,738		
Operating Temperature	41° to 131° F/5° to 55°C				
	36 GB, 15K	Capacity	36,420,075,520 bytes		
		Height	1 in/2.54 cm		
		Width	3.5 in/8.89 cm		
		Interface	Ultra320 SCSI 68-pin		
		Synchronous Transfer Rate (Maximum)	320 MB/s		
		Seek Time (typical reads, including settling)	Single Track	0.4 ms	
			Average	3.8 ms	
			Full-Stroke	6.7 ms	
		Rotational Speed	15,000 rpm		
		Logical Blocks	71,132,960		
Operating Temperature	41° to 131° F/5° to 55°C				
	36 GB, 10K	Capacity	36,420,075,520 bytes		
		Height	1 in/2.54 cm		
		Width	3.5 in/8.89 cm		
		Interface	Ultra320 SCSI 68-pin		
		Synchronous Transfer Rate (Maximum)	320 MB/s		
		Seek Time (typical reads, including settling)	Single Track	0.55 ms	
			Average	4.90 ms	
			Full-Stroke	9.20 ms	
		Rotational Speed	10,000 rpm		
		Logical Blocks	71,132,960		
Operating Temperature	41° to 131° F/5° to 55°C				
	18 GB	Capacity	18,210,037,760 bytes		
		Height	1 in/2.54 cm		
		Width	3.5 in/8.89 cm		
		Interface	Ultra320 SCSI 68-pin		
		Synchronous Transfer Rate (Maximum)	320 MB/s		
		Seek Time (typical reads, including settling)	Single Track	0.4 ms	
			Average	3.8 ms	
			Full-Stroke	6.7 ms	
		Rotational Speed	15,000 rpm		
		Logical Blocks	35,566,480		
Operating Temperature	41° to 131° F/5° to 55°C				

Technical Specifications

Ultra ATA Hard Drives	Capacity	Capacity	Height	Width	Interface	Synchronous Transfer Rate (Maximum)	Seek Time (typical reads, including settling)	Rotational Speed	Operating Temperature	
160 GB	Capacity	160,000 MB	1 in/2.54 cm	4 in/10.16 cm	Ultra ATA/100	100 MB/s	Single Track	0.8 ms		
	Height	1 in/2.54 cm					Average	< 9.1 ms		
	Width	4 in/10.16 cm					Full-Stroke	17.0 ms		
	Interface	Ultra ATA/100								
	Synchronous Transfer Rate (Maximum)	100 MB/s								
	Seek Time (typical reads, including settling)									
	Rotational Speed	7,200 rpm								
	Operating Temperature	41° to 131° F/5° to 55°C								
	120 GB	Capacity	122,942 MB	1 in/2.54 cm	4 in/10.16 cm	Ultra ATA/100	100 MB/s	Single Track	0.8 ms	
		Height	1 in/2.54 cm					Average	< 9.1 ms	
Width		4 in/10.16 cm					Full-Stroke	17.0 ms		
Interface		Ultra ATA/100								
Synchronous Transfer Rate (Maximum)		100 MB/s								
Seek Time (typical reads, including settling)										
Rotational Speed		7,200 rpm								
Operating Temperature		41° to 131° F/5° to 55°C								
80 GB		Capacity	81,964 MB	1 in/2.54 cm	4 in/10.16 cm	Ultra ATA/100	100 MB/s	Single Track	0.8 ms	
		Height	1 in/2.54 cm					Average	< 9.1 ms	
	Width	4 in/10.16 cm					Full-Stroke	17.0 ms		
	Interface	Ultra ATA/100								
	Synchronous Transfer Rate (Maximum)	100 MB/s								
	Seek Time (typical reads, including settling)									
	Rotational Speed	7,200 rpm								
	Logical Blocks	81,964,302,336								
	Operating Temperature	41° to 131° F/5° to 55°C								
	40 GB	Capacity	80,293 MB	1 in/2.54 cm	4 in/10.16 cm	Ultra ATA/100	100 MB/s	Single Track	0.8 ms	
Height		1 in/2.54 cm					Average	< 9.1 ms		
Width		4 in/10.16 cm					Full-Stroke	17.0 ms		
Interface		Ultra ATA/100								
Synchronous Transfer Rate (Maximum)		100 MB/s								
Seek Time (typical reads, including settling)										
Rotational Speed		7,200 rpm								
Logical Blocks		80,293,248								
Operating Temperature		41° to 131° F/5° to 55°C								

Technical Specifications

48X CD-ROM Drive	Height	5.25-inch, half-height		
	Interface type	EIDE/ATAPI		
	Dimensions— External, Excluding Bezel (W x H)	5.74 x 1.62 in/14.6 x 4.13 cm		
	Weight	1.6 lb/0.75 kg		
	Disc diameter	5 in, 3 in (12 cm, 8 cm)		
	Disc thickness	0.05 inch (1.2 mm)		
	Disk	Applicable Disk	Mixed Mode (Audio and Data Combined) CD-DA, Mode 1(basic format), Mode2 form1& form2 Photo-CD (Multi-Session), CD-XA Ready CD-I Ready, CD-Plus/CD-Extra, CD-RW	
		Capacity (yellow book)	2,048 bytes/block (Mode1&Mode2 Form 1) 2,340, 2,336 bytes/block (Mode2) 2,332 bytes/block (Mode2 Form2) 2,352 bytes/block (CD-DA)	
		Rotational Speed	22X- 48X(CAV) 10,000 rpm maximum	
	Block Size	Mode 1	2,048 bytes	
		Mode 2	2,340, 2,336 bytes	
		CD-DA	2,352 bytes	
		CD-XA	2,328 bytes	
	Data transfer rate	Sustained	3,300 to 7,200 KB/s	
Data buffer	128 KB			
Access Times (typical)	Random	75 ms (typical)		
Audio Output Level	Line-Out	0.7 VRMS		
Start-up Time (typical)	< 3.3 s			
Stop Time	< 3.6 s			
Operating Conditions	Temperature	41° to 122° F/5° to 50° C		
	Humidity	10% to 80%		

Technical Specifications

48/24/48X CD-RW	Capacity	700 MB CD disc		
	Dimensions (HxWxD)	1.63 x 5.75 x 7.27 in/4.13 x 14.6 x 18.5 cm		
	Weight	2.0 lb/0.9 kg		
	Interface	ATAPI/EIDE		
	Mounting Orientation	Horizontal or vertical		
	Data Transfer Rates – Read	Digital audio extraction (minimum) —1,800 KB/s (12X) CD read — up to 7,200 KB/s (48X) DVD read — up to 21,600 KB/s (16X)		
	Media and Formats - Read	Formats: CD-DA, CD-ROM (Mode 1 and 2), CD-ROM XA (Mode 2, Form 1 and 2), Mixed Mode, CD-Plus, CD-Extra, CD-I FMV, Video CD, CD-Text, Photo CD (single and multisession); Media: stamped, CD-R, CD-RW		
	Data Transfer Rates - Write	CD-R write — 1200 KB/s (8X) CD-R write — 1800 KB/s (12X) CD-R write — 2400 KB/s (16X) CD-R write — 3000 KB/s (20X) to 6000 KB/s (40X) CD-R write — 7200 KB/s (48X) CD-RW write — 600 KB/s (4X) CD-RW write — 1500 KB/s (10X) CD-RW write — 2400 KB/s (16X) CD-RW write — 3600 KB/s (24X)		
	Media and Formats - Write	Formats: CD-DA, CD-ROM (Mode 1 and 2), CD-ROM XA (Mode 2, Form 1 and 2), Mixed Mode, CD-Plus, CD-Extra, CD-I FMV, Video CD, CD-Text; Media: CD-R, CD-RW (including ultra-speed)		
	Write Methods	Disc-at-once, session-at-once,, track-at-once, incremental fixed and variable packet, multisession		
	Data Transfer Modes	PIO Mode 4 (16.6 MB/s); Multi-word DMA mode 2 (16.6 MB/s); UltraDMA Mode 2 (33.3 MB/s)		
	Access Times	CD-ROM Mode 1	100 ms	
	(typical reads, including settling)	Full Stroke CD	160 ms (seek)	
	Start-up Time (typical)	<4 s (single session), <30 s (multisession)		
	Stop Time (typical)	<3 s		
	Write Buffer Size	2 MB		
	Audio Output	Line-Out	0.7 VRMS	
		Signal-to-Noise Ratio	80 dB	
		Channel Separation	70 dB	
	Configuration Jumper Block	Master, slave, and cable select modes		
Operating Conditions	Temperature	41° to 113° F/5° to 45° C		
	Humidity	10% to 80%		
Approvals/Environmental	MPC-3 compliant, multi-read requirements, UL 1950, ACA AS/NZS 3548, ANSI C63.4–1992, ATAPI Spec SFF-8020, ATA Spec X3T9.2, CB Bulletin No. 92A, CSA C22.2 No. 950-1995, C.I.S.P.R. Pub 22, DHHS/FDA, EMKO-TSE 07/94, TUV, EN60825-1			
Operating Systems Supported	Microsoft Windows 2000, Windows XP			
Supplied software	Roxio Easy CD Creator 5.3.4: Create or copy CDs and DVDs, including music and data CDs, and data DVDs; Dantz Retrospect Express 6.0: Back up systems to CD, DVD, or tape media.			

Technical Specifications

16X/40 DVD-ROM Read	Height	5.25-inch, half-height		
	Interface type	ATAPI		
	Dimensions— External, Excluding Bezel (W x H)	5.88 x 1.71 in/14.94 x 4.34 cm		
	Disc diameter	5 in, 3 in (12 cm, 8 cm)		
	Disc thickness	0.05 inch (1.2 mm)		
	Track pitch	1.6 µm (CD), 0.74 µm (DVD)		
	Disc center hole diameter	0.6 inch (15 mm)		
	Disc formats	DVD-ROM (single and dual layer); DVD-video; DVD-R version 1.0 and 2.0; DVD-RW version 1.0 and 1.1; DVD-R/RW multi-border; DVD+RW; CD-ROM Mode 1 and 2; CD-DA; CD-ROM XA Mode 2, Form 1 and 2; CD-extra; CD-text; CD-I Mode 2, Form 1 and 2; CD-I ready; video CD, CD-bridge; PhotoCD (single and multi-session); CD-R; CD-RW		
	Disc capacity	DVD-ROM	4.7 GB (DVD-5), 8.54 GB (DVD-9), 9.4 GB (DVD-10), 3.95 GB (DVD-R version 1.0), 4.7 GB (DVD-R version 2.0), 4.7 GB (DVD-RW version 1.0 and 1.1), 4.7 GB (DVD+RW)	
		CD-ROM	540 MB (Mode 1, 12 cm), 640 MB (Mode 2, 12 cm), 700 MB (80 minimum CD-R and CD-RW), 180 MB (8 cm)	
	Block size (bytes)	DVD-ROM – 2048; CD-ROM Mode 0 – 2352; CD-ROM Mode 1 – 2352, 2340, 2336, 2048; CD-ROM Mode 2 – 2352, 2340, 2336, 2048		
	Access times (typical reads, including settling)	DVD-ROM single layer	< 120 ms	
		CD-ROM Mode 1	< 90 ms	
		Full stroke DVD	< 240 ms (seek)	
		Full stroke CD	< 160 ms (seek)	
	Data transfer rates	2600 – 6000 KB/s (40X CAV CD-ROM mode)		
		8100 – 21,600 KB/s (16X CAV DVD-ROM mode)		
	Data transfer modes	PIO Mode 4 (16.6 MB/s); Multi-word DMA mode 2 (16.6 MB/s); UltraDMA Mode 3 (44.4 MB/s)		
	Power	Source	Four-pin, DC power receptacle	
DC power requirement		5 VDC ± 5%—100 mV ripple p-p		
		12 VDC ± 5%—200 mV ripple p-p		
DC current		5 VDC – <800 mA typical, < 1000 mA maximum		
	12 VDC – < 870 mA typical			
Audio Output Level	0.7 Vrms (typical)			
Configuration Jumper Block	Master, slave, and cable select modes			
Data interface connector	40-pin, shrouded and keyed, flat ribbon			
Environmental (all conditions non-condensing)	Temperature (operating)	41° to 122° F/5° to 50° C		
	Relative humidity (operating)	10% to 85%		
	Maximum wet bulb temperature (operating)	86° F/30° C		
Certifications, approvals	MMC II support, multi-read certification, Microsoft WHQL certification, ACA AS/NZS 3548 class B, CNS 13438, C.I.S.P.R. Pub 22, TUV or VDE EN60950, EN 55022, EN55024, SEMKO, NEMKO, DEMKO, FIMKO, EN 60825-1, UL 60950, CSA C22.2 60950-2000,			
Operating systems supported	Microsoft Windows 98, Microsoft Windows NT 4.0, Microsoft Windows 2000, Windows XP Professional			

Technical Specifications

48/24/48+16X Combo CD-RW/DVD-ROM	Capacity	4.7 and 9.4 GB DVD disc / 700 MB CD disc	
	Dimensions (HxWxD)	4.13 x 14.6 x 18.5 cm / 1.63 x 5.75 x 7.27 in	
	Weight	0.9 kg / 2.0 lb	
	Interface	ATAPI/EIDE	
	Mounting Orientation	Horizontal or vertical	
	Data Transfer Rates - Read	Digital audio extraction (minimum) —1,200 KB/s (8X) CD read — up to 7,200 KB/s (48X) DVD read — up to 21,600 KB/s (16X)	
	Media and Formats - Read	CD Formats: CD-DA, CD-ROM (Modes 1 and 2), CD-ROM XA (Mode 2, Form 1 and 2), Mixed mode, CD-Extra, CD-I FMV, Video CD, Photo CD (single and multi-session), CD-Text, CD-Plus; CD Media: stamped, CD-R; CD-RW DVD Formats: DVD-ROM, DVD-Video (with application support), DVD-R (version 1.0 and 2.0), DVD-RW (version 1.0 and 1.1), DVD-R multi-border; DVD Media: stamped (single or dual layer, single sided), DVD+RW, DVD+R, DVD-R, DVD-RW	
	Data Transfer Rates - Write	CD-R write — 600 KB/s (4X) CD-R write — 1200 KB/s (8X) CD-R write — 1800 KB/s (12X) CD-R write — 2400 KB/s (16X) CD-R write — 3600 KB/s (24X) CD-R write — 4800 KB/s (32X) CD-R write — 6000 KB/s (40X) CD-R write — 7200 KB/s (48X) CD-RW write — 600 KB/s (4X) CD-RW write — 1500 KB/s (10X) CD-RW write — 2400 KB/s (16X) CD-RW write — 3600 KB/s (24X)	
	Media Formats - Write	CD Formats: CD-DA, CD-ROM (Mode 1), CD-ROM XA (Mode 2, Form 1 and 2), Mixed mode, CD-Extra, CD-I FMV, Video CD, CD-Plus; CD Media: CD-R; CD-RW	
	Write Methods	Disc-at-once, session-at-once,, track-at-once, incremental fixed and variable packet, multisession	
	Data Transfer Modes	PIO Mode 4 (16.6 MB/s); Multi-word DMA mode 2 (16.6 MB/s); UltraDMA Mode 2 (33.3 MB/s)	
	Access Times (typical reads, including settling)	DVD-ROM Single Layer	120 ms
		Random	
		CD-ROM Mode 1	110 ms
		Full Stroke DVD	210 ms
		Full Stroke CD	160 ms
	Start-up Time (typical)	<4 seconds (single session), <30 seconds (multisession)	
	Stop Time (typical)	4 s	
	Write Buffer Size	2 MB (minimum)	
	Audio Output	Line-Out	0.7 VRMS
		Signal-to-Noise Ratio	74 dB
		Channel Separation	65 dB
	Configuration Jumper Block	Master, slave, and cable select modes	
	Operating Conditions	Temperature	5° to 50° C / 41° to 122° F
		Humidity	10% to 85%

Technical Specifications

16/10/40+4/2.4/8x 4.7 GB DVD+RW – 300i	Capacity	4.7 GB DVD disc / 700 MB CD disc
	Dimensions (HxWxD)	4.23 x 14.6 x 19.8 cm / 1.66 x 5.83 x 7.74 in
	Weight	1.06 kg / 2.3 lb
	Interface	ATAPI/EIDE
	Mounting Orientation	Horizontal (80 or 120 mm discs) or vertical (120 mm discs only)
	Data Transfer Rates - Read	Digital audio extraction (minimum) —1,200 KB/s (8X) CD read — up to 6,000 KB/s (40X) DVD read — up to 10,800 KB/s (8X)
	Media and Formats - Read	CD formats: CD-DA (Red Book), CD-ROM (Modes 1 and 2 - Yellow Book), CD-ROM XA (Mode 2, Forms 1 and 2), CD-I (FMV), Photo CD (single and multi-session), Video CD, CD-Text, CD Extra; CD media: stamped, CD-R, CD-RW DVD formats: DVD-ROM, DVD-Video (with application support); DVD media: stamped (single or dual layer, single sided), DVD+RW, DVD+R, DVD-R, DVD-RW
	Data Transfer Rates - Write	DVD+R write — 5,412 KB/s (4X) DVD+RW write or rewrite — 3,247 KB/s (2.4X) CD-R write — 600 KB/s (4X) CD-R write — 1200 KB/s (8X) CD-R write — 2,400 KB/s (16X) CD-RW write — 600 KB/s (4X) CD-RW write — 1500 KB/s (10X)
	Media and Formats - Write	CD formats: CD-DA (Red Book), CD-ROM (Modes 1 and 2 - Yellow Book), CD-ROM XA (Mode 2, Forms 1 and 2), CD-I (FMV), Photo CD (single and multi-session), Video CD, CD-Text, CD Extra; CD media: CD-R, CD-RW DVD formats: DVD-ROM, DVD-Video (with application support); DVD media: DVD+RW, DVD+R
	Write Methods	Disc-at-once, track-at-once, incremental fixed and variable packet, random access write (DVD+RW only), sequential write (DVD +R, +RW)
	Data Transfer Modes	ATA PIO mode 4—16.7-Mbps, ATA UltraDMA mode 2—33-Mbps (default)
	Access Times (typical)	DVD-ROM Single Layer 140 ms Random CD-ROM Random 120 ms CD-ROM Full stroke 200 ms
	Start-up Time (typical)	< 5 s
	Stop Time (typical)	< 6 s
	Write Buffer Size	2 MB (minimum)
	Audio Output	Line-Out 0.75 VRMS Signal-to-Noise Ratio 75 dB Channel Separation 60 dB
	Configuration Jumper Block	Master, slave, and cable select modes
	Operating Conditions	Temperature 0° to 50°C / 32° to 122°F Humidity 10% to 70% (non-condensing)

Technical Specifications

Intel PRO/100 + Management Adapter	Network Interface	10Base-T or 100Base-TX		
	Expansion Bus Architecture	PCI 2.2		
	Network Transfer Rate	10Base-T (Half-Duplex)	10 MB/s	
		10Base-T (Full-Duplex)	20 MB/s	
		100Base-TX (Half-Duplex)	100 MB/s	
		100Base-TX (Full-Duplex)	200 MB/s	
	Connectors	RJ-45		
	Standards Compliance	10 MB/s Ethernet	IEEE 802.3	
		100 MB/s Ethernet	IEEE 802.3 μ	
	I/O Address	Auto-configured		
	Remote Wakeup	Yes		
	Operating Temperature	0° to 55° F/10° to 35° C		
	Operating Humidity (non-condensing)	85% at 131° F/55° C		
	Operating Altitude	10,000 ft/3,048 m		
	Communication Processor	Intel 82559		
	OS Driver Support	Windows NT 4.0	NDIS 3.0, 4.0 Compliant	
		Windows 95, 98, 2000, XP Pro	NDIS 3.0, 4.0, 5.0 Compliant	
Novell NetWare Server v. 3.x, 4.x and 5.0		ODI Compliant		
SunSoft Solaris		Not supported		
SCO UnixWare [®] , OpenDesktop, OpenServer		Supported		
Intel Pro/1000 XT Server Adapter Gigabit PCI card	Network Interface	10Base-T, 100Base-TX, 1000Base-T		
	Expansion Bus Architecture	PCI 2.2, PCI-X 1.0		
	Network Transfer Rate	10Base-T (Half-Duplex)	10 MB/s	
		10Base-T (Full-Duplex)	20 MB/s	
		100Base-TX (Half-Duplex)	100 MB/s	
		100Base-TX (Full-Duplex)	200 MB/s	
		1000Base-T	1000 MB/s	
	Connectors	RJ-45		
	Standards Compliance	10 MB/s Ethernet	IEEE 802.3	
		100 MB/s Ethernet	IEEE 802.3 μ	
		1000 MB/s Ethernet	IEEE 802.3 μ	
	I/O Address	Auto-configured		
	Remote Wakeup	Yes		
	Management capabilities	Wired for management (WfM) Baseline v2.0; DMI 2.0 support, WMI and SNMP-manageable; Offline diagnostics; ACPI Power Management; WoL		
	Operating Temperature	0° to 55° F/10° to 35° C		
	Operating Humidity (non-condensing)	85% at 131° F/55° C		
	Communication Processor	Intel 82544EI		
Memory	64KB integrated			

Technical Specifications

Intel Pro 1000 MT NIC DC193A	Dimensions	6.4 x 4.8 x 0.8 inches (16.3 x 12.1 x 1.9 cm)		
	Connector	RJ-45		
	Controller	Intel 82540EM Gigabit Controller		
	Memory	Integrated 96 Kb frame buffer memory		
	Data rates supported	10/100/1000 Mbps		
	Compliance	IEEE 802.1A, 802.1P, 802.1P, 802.1Q, 802.2, 802.3, 802.3AB and 802.3u compliant, 802.3x flow control		
	Bus architecture	PCI 2.2		
	Data path width	32-bit, 33/66 MHz bus interface		
	Data transfer mode	Bus-master DMA		
	Hardware certifications	FCC, B, CE, TUV- cTUVus Mark Canada and United States, TUV- GS Mark for European Union		
	Power requirement	1.48 watts @ +3.3V AUX supply with 5V tolerance		
	Boot ROM support	Yes		
	Network transfer rate	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T, 1000 Mbps		
	Environmental	Operating temperature	32° to 131°F (0° to 55° C)	
		Operating humidity	85% at 131° F (55° C)	
	Environmental	Operating temperature	32° to 131°F (0° to 55° C)	
	Management capabilities	ACPI, WOL and DMI 2.0, PXE 2.0, WfM 2.0, Intel PROset II utility		
	Kit contents	The Intel Pro 1000 MT NIC, CD containing Intel PROset II NIC drivers, quick install guide, product warranty statement		

Technical Specifications

NVIDIA Quadro NVS 200 Graphics Card	Form Factor	Low profile
	Graphics Controller	Integrated Quadro4 2D/3D 128-bit graphics processor unit (GPU)
	Bus Type	AGP 4x
	RAMDAC	Dual 350 MHz
	Memory	64 MB 166MHz 4 M x 16 SDR 6ns unified frame buffer
	Connectors	Single LFH-60
	Dimensions	low-profile form factor
	Multi-monitor support	Dual monitors with NVIDIA's nView
	nView Hardware Architecture	Dual 350MHz RAMDACs Integrated TMDS Digital Vibrance Control (DVC) 32-bit color 2048 x 1536 @ 60 Hz maximum resolution 2D rendering engine optimized for 32-, 24-, 16-, 15-, and 8-bpp modes Unified driver architecture (UDA) provides easy installation and manageability
	High definition video processor	Full-screen, full-frame video playback of HDTV and DVD content DVD-ready motion compensation for MPEG-2 Independent hardware color controls for video overlay Hardware color-space conversion (YUV 4:2:2 and 4:2:0) IDCT motion compensation 5-tap horizontal by 3-tap vertical filtering 8:1 up/down scaling
	Supported graphics APIs	Fully compliant with OpenGL 1.3 and DirectX 8.1
	Available graphics drivers	Microsoft Windows XP and Microsoft Windows 2000

NVIDIA Quadro NVS 200 display resolutions & refresh rates

SINGLE CRT DISPLAY		
Resolution	Maximum Refresh Rate	Bits per Pixel
640 x 480	120 Hz	8, 16, 24
800 x 600	120 Hz	8, 16, 24
1024 x 768	120 Hz	8, 16, 24
1152 x 864	120 Hz	8, 16, 24
1280 x 1024	120 Hz	8, 16, 24
1600 x 1200	100 Hz	8, 16
1600 x 1200	85 Hz	8, 16, 24
1920 x 1080	100 Hz	8, 16
1920 x 1080	75 Hz	8, 16, 24
1920 x 1200	85 Hz	8, 16
1920 x 1200	70 Hz	8, 16, 24
1920 x 1440	75Hz	8, 16
1920 x 1440	60Hz	8, 16, 24
2048 x 1536	60Hz	8, 16

Technical Specifications

NVIDIA Quadro NVS 400 Graphics Card	Form Factor	ATX
	Graphics Controller	Integrated Quadro4 2D/3D 128-bit graphics processor unit (GPU)
	Bus Type	PCI
	RAMDAC	Dual 350 MHz
	Memory	64 MB 220 MHz, 4mx 32 DDR per GPU, 32 MB per GPU unified frame buffer
	Connectors	Dual LFH-60
	Dimensions	Low-profile form factor
	Multi-monitor support	1 to 4 displays with nView – with two cards (1 PCI per card), up to 8 monitors can be driven
	nView Hardware Architecture	32-bit color 2048x1536 @ 75Hz maximum resolution Dual 350MHz RAMDACs Integrated TMDS Digital Vibrance Control (DVC) High-performance 2D rendering engine Optimized for 32-, 24-, 16-, 15- and 8-bpp modes
	High-definition video processor (HDVP)	Full-screen, full-frame video playback of HDTV and DVD content DVD-ready motion compensation for MPEG-2 Independent hardware color controls for video overlay Hardware color-space conversion (YUV 4:2:2 and 4:2:0) IDCT Motion compensation 5-tap horizontal by 3-tap vertical filtering 8:1 up/down scaling
	Supported graphics APIs	Fully compliant with OpenGL 1.3 and DirectX 8.1
	Available graphics drivers	Microsoft Windows XP and Microsoft Windows 2000, Linux See: http://www.hp.com/workstations/support

NVIDIA Quadro NVS 400 display resolutions & refresh rates

SINGLE CRT DISPLAY		
Resolution	Maximum Refresh Rate	Bits per Pixel
640 x 480	120 Hz	8, 16, 24
800 x 600	120 Hz	8, 16, 24
1024 x 768	120 Hz	8, 16, 24
1152 x 864	120 Hz	8, 16, 24
1280 x 1024	120 Hz	8, 16, 24
1600 x 1200	100 Hz	8, 16
1600 x 1200	85 Hz	8, 16, 24
1920 x 1080	100 Hz	8, 16
1920 x 1080	75 Hz	8, 16, 24
1920 x 1200	85 Hz	8, 16
1920 x 1200	70 Hz	8, 16, 24
1920 x 1440	75Hz	8, 16
1920 x 1440	60Hz	8, 16, 24
2048 x 1536	60Hz	8, 16

Technical Specifications

NVIDIA Quadro2 EX Graphics Card	Form Factor	ATX
	Graphics Controller	NVIDIA NV11GL GPU
	Bus Type	AGP 2x/4x Version 2.0 compliant
	RAMDAC	350MHz
	Memory	32MB SDR SDRAM unified frame buffer, Z-buffer and Texture storage
	Connectors	DB-15 analog monitor output
	Dimensions (LxWxH)	Single short form factor AGP Low Profile card. 6.5 x 2.5 x 0.6 in/16.51 x 6.35 x 1.5 cm
	Multi-monitor support	
	Additional product features	32MB SDR SDRAM unified frame buffer, Z-buffer and Texture storage VESA 3 (flash ROM) BIOS 24-bit Z, 8-bit stored alpha and 8-bit Stencil planes Compliant with Microsoft/Intel PC2001 Workstation requirements Video Timings compliant with VESA DMT 1.0 and VESA GTF 1.0 specifications DDC2B+ Monitor support on all OS platforms ACPI Version 1.0b Power Management support (all modes)
	AGP 2X/4X Version 2.0 compliant including	Sideband Addressing AGP Texturing (Execute Mode) Fast writes support
	NVIDIA NV11GL GPU featuring:	175 MHz engine clock rate 128-bit external frame buffer interface running at a clock rate of 166 MHz VGA controller 2D Engine with 128-bit datapath processing multiple pixels per clock Integrated transform and lighting engines NVIDIA Shading Rasterizer enabling real-time per-pixel effects Cube environment mapping Microsoft DirectX and SCTC Texture compression High performance 2D rendering engine High-Definition Video Processor for full-screen, full-frame DVD playback
	Supported graphics APIs	OpenGL 1.2 and below DirectX 7 and below
	Available graphics drivers	HP-tested Windows XP HP-tested Windows 2000 HP qualified drivers may be preloaded or available from the HP support Web site: http://www.hp.com/workstations/support

NVIDIA Quadro2 EX Graphics Card display resolutions & refresh rates	SINGLE CRT DISPLAY		
	Resolution	Maximum Refresh Rate	Bits per Pixel
	640x480	240Hz	8, 16, 24/8
	800x600	240Hz	8, 16, 24/8
	1024x768	200Hz	8, 16, 24/8
	1152x864	170Hz	8, 16, 24/8
	1280x1024	150Hz	8, 16, 24/8
	1600x900	120Hz	8, 16, 24/8
	1600x1200	100Hz	8, 16, 24/8
	1600x1280	127Hz	8, 16, 24/8
	1920x1080	85Hz	8, 16, 24/8
	1920x1200	85Hz	8, 16, 24/8
	1920x1440	85Hz	8, 16
	1920x1440	75Hz	24/8
	2048x1536	75Hz	8, 16
	2048x1536	60Hz	24/8

Technical Specifications

NVIDIA Quadro4 380 XGL Graphics Card	Form Factor	ATX
	Graphics Controller	NVIDIA NV18GL GPU
	Bus Type	AGP 8x Version 3.0 compliant AGP 4x/2x Version 2.0 compliant
	Memory	64MB DDR SDRAM unified frame buffer, Z-buffer and Texture storage
	RAMDAC	Dual 350MHz integrated
	Connectors	VGA DB-15 and DVI-I analog/digital monitor outputs, 4-pin mini DIN providing TV output
	Dimensions	AGP full height ATX card. 4.25" x 6.875"
	Multi-monitor support	Dual monitor
	Additional product features	64 MB DDR SDRAM unified frame buffer, Z-buffer and Texture storage 128 KB BIOS 3.3V Flash ROM reprogrammable by SW Hardware Overlay Planes Hardware two-sided lighting Hardware accelerated antialiased points and lines TV Output Diamond exit rule line rasterization for improved line quality 3D Texture support Occlusion Culling Compliant with Microsoft/Intel PC2001 Workstation requirements Video Timings compliant with VESA DMT 1.0 and VESA GTF 1.0 specifications DDC2B+ Monitor support for Windows 2000 and Windows XP ACPI Version 1.0b Power Management support (all modes)
	AGP 8x Version 3.0 compliant and 2x/4x Version 2.0 compliant including	Sideband Addressing AGP Texturing (Execute Mode) Fast writes support
NV18GL GPU featuring:	275 MHz engine clock rate 250 MHz memory clock rate 128-bit memory interface VGA controller Dual integrated display controllers supporting up to 1920x1440 @ 85Hz and 2048x1536 @ 75Hz on both displays 4 parallel pixel pipelines 2 parallel geometry engines nfiniteFX II programmable vertex shader technology and NVIDIA OpenGL extensions Full hardware support for NVIDIA Cg shader programming language	
Supported graphics APIs	OpenGL 1.3 (and OpenGL 2.0 when available) ICD with immediate mode support for all OGL primitive types DirectX 8 and above	
Available graphics drivers	HP-tested Windows XP, HP-tested Windows 2000, HP-tested Linux (1st Calendar Quarter 2003) HP qualified drivers may be preloaded or available from the HP support web site: http://www.hp.com/workstations/support	

Technical Specifications

NVIDIA Quadro4 380 XGL
Graphics Card display
resolutions & refresh rates

MONITOR 1, 2 ANALOG/DIGITAL		
Resolution	Maximum Refresh Rate	Bits per Pixel
640x480	240Hz/240Hz	8, 16, 24
800x600	240Hz/200Hz	8, 16, 24
1024x768	170Hz/140Hz	8, 16, 24
1152x864	170Hz/100Hz	8, 16, 24
1280x720	150Hz/120Hz	8, 16, 24
1280x960	150Hz/85Hz	8, 16, 24
1280x1024	150Hz/75Hz	8, 16, 24
1600x900	120Hz/75Hz/ NoDigitalDisplaySupport (unbold)	8, 16, 24
1600x1024	100Hz/72Hz/ NoDigitalDisplaySupport	8, 16, 24
1600x1200	120Hz/60Hz/ NoDigitalDisplaySupport	8, 16
1600x1200	100Hz/60Hz/ NoDigitalDisplaySupport	24
1920x1080	100Hz/ NoDigitalDisplaySupport	8, 16
1920x1080	85Hz/ NoDigitalDisplaySupport	24
1920x1200	100Hz/ NoDigitalDisplaySupport	8, 16
1920x1200	85Hz/ NoDigitalDisplaySupport	24
1920x1440	85Hz/ NoDigitalDisplaySupport	8, 16
1920x1440	75Hz/ NoDigitalDisplaySupport	24
2048x1536	75Hz/ NoDigitalDisplaySupport	8, 16
2048x1536	60Hz/ NoDigitalDisplaySupport	24

Technical Specifications

ATI FIRE GL 8800 Graphics Card	Form Factor	ATX
	Graphics Controller	ATI Radeon 8800 GPU
	Bus Type	AGP 1x/2x/4x Version 2.0 compliant
	RAMDAC	400MHz/30-bit
	Memory	128MB DDR SGRAM unified frame buffer, Z-buffer and Texture storage
	Connectors	DB-15 analog and DVI-I analog/digital monitor outputs
	Dimensions	Single short form factor AGP/ATX card. 174.63mm x 107.96mm
	Multi-monitor support	Dual Screen output for resolutions up to 2x1600x1200x32 bit
	Additional product features	128 MB DDR SGRAM unified frame buffer, Z-buffer and Texture storage 64 KB BIOS Serial Flash ROM, reprogrammable by SW, 3.3V only, no Jumpers 2D and 3D acceleration provided for 16-bit and 32-bit RGB modes Hardware cursor with full color alpha channel (64x64x32bpp) 24-bit Z, 8-bit stored alpha and 8-bit Stencil planes Bus mastering support for 2D/3D display lists and local memory vertex list execution Hardware lighting support for up to 8 lights Cubic Environment Mapping and 3D Texture support Full Scene Anti-Aliasing (FSAA) support with multisampling up to 6x Video Engine supports YCrCb (4:2:2, 4:1:0, 4:2:0) conversion Video scaling and up to 8x4 tap filtering supported for all YUV and RGB16/32 formats Dual Screen output for resolutions up to 2x1600x1200x32 bit Per window double buffering on all screen resolutions Compliant with Microsoft/Intel PC2001 Workstation requirements Video Timings compliant with VESA DMT 1.0 and VESA GTF 1.0 specifications DDC2B+ Monitor support on all OS platforms ACPI Version 1.0b Power Management support (all modes)
	AGP1x/2x/4x Version 2.0 compliant including	Sideband Addressing AGP Texturing (Execute Mode) Fast writes support
Radeon 8800 GPU featuring:	275 MHz engine clock rate VGA controller 2D Engine with 128-bit datapath processing multiple pixels per clock PIXEL TAPESTRY II, 3D rendering engine utilizing 4 parallel pipelines each capable of handling up to 6 textures in a single pass, delivering 2.4 Gigatexels/s fill rate CHARISMA ENGINE II, geometry engine delivering up to 75 million transformed, clipped and lit triangles per second peak processing capability VIDEO IMMERSION II, industry leading video technology Dual independent display controllers 128-bit external frame buffer interface running at a clock rate of 300 MHz DDR provides a memory bandwidth of up to 9.6 GB per second	
Supported graphics APIs	OpenGL 1.3 ICD with immediate mode support for all OGL primitive types DirectX 8.1	
Available graphics drivers	HP-tested Windows XP HP-tested Windows 2000 HP-tested Linux HP qualified drivers may be preloaded or available from the HP support Web site: http://www.hp.com/workstations/support	

Technical Specifications

ATI FIRE GL 8800 Graphics Card
display resolutions & refresh
rates

SINGLE CRT DISPLAY		
Resolution	Maximum Refresh Rate	Bits per Pixel
640x480	100Hz	16, 24
800x600	100Hz	16, 24
1024x768	100Hz	16, 24
1152x864	100Hz	16, 24
1280x960	100Hz	16, 24
1280x1024	100Hz	16, 24
1600x1000	100Hz	16, 24
1600x1024	100Hz	16, 24
1600x1200	100Hz	16, 24
1792x1344	85Hz	16, 24
1920x1080	100Hz	16, 24
1920x1200	100Hz	16, 24
2048x1536	75Hz	16, 24

SINGLE DIGITAL DISPLAY		
Single CRT Display Resolution	Maximum Refresh Rate	Bits per Pixel
640x480	75Hz	16, 24
800x600	75Hz	16, 24
1024x768	75Hz	16, 24
1152x864	75Hz	16, 24
1280x960	75Hz	16, 24
1280x1024	75Hz	16, 24
1600x1000	75Hz	16, 24
1600x1024	75Hz	16, 24
1600x1200	75Hz	16, 24

DUAL DISPLAY			
Resolution	Monitor 1 Maximum Refresh Rate	Monitor 2 Analog/Digital Maximum Refresh Rate	Bits per Pixel
640x480	100Hz	100Hz/75Hz	16, 24
800x600	100Hz	100Hz/75Hz	16, 24
1024x768	100Hz	100Hz/75Hz	16, 24
1280x1024	100Hz	85Hz/75Hz	16, 24
1600x1200	100Hz	85Hz/75Hz	16, 24

Technical Specifications

ATI FIRE GL Z1-128p Graphics Card	Form Factor	ATX
	Graphics Controller	ATI FGL 9700 GPU
	Bus Type	AGP-Pro50 1x/2x/4x/8x Version 3.0 compliant
	RAMDAC	Dual 400MHz / 30-bit
	Memory	256MB DDR SDRAM unified frame buffer, Z-buffer and Texture storage
	Connectors	Dual DVI-I analog/digital monitor outputs
	Dimensions	Single AGP/ATX card. 230.28mm x 107.96mm
	Multi-monitor support	Dual Screen output for resolutions up to 2x2048x1536x32 bit
	Additional product features	256MB DDR SDRAM unified frame buffer, Z-buffer and Texture storage 64-KB BIOS Serial Flash ROM, reprogrammable by SW, 3.3V only, no Jumpers 2D and 3D acceleration provided for 16-bit and 32-bit RGB? modes Hardware cursor with full color alpha channel 16/32 bit Z buffer, 16/32 bit W-buffer, 8-bit stored alpha and 8-bit Stencil planes Bus mastering support for 2D/3D display lists and local memory vertex list execution Hardware lighting support for up to 8 lights Bilinear, Trilinear and Anisotropic texturing Cubic Environment and Perturbation Bump Mapping Projective Texture, 3D Texture and Video Texture support Full Scene Anti-Aliasing (FSAA) support with up to 6 subsamples Video Engine supports YCrCb (4:2:2, 4:1:0, 4:2:0) to RGB conversion Video scaling and up to 4x4 tap filtering supported for all YUV and RGB16/32 formats Per pixel quad buffering on all screen resolutions VESA compliant Stereoscopic Interface on MiniDin Connector Compliant with Microsoft/Intel PC2001 Workstation requirements Video Timings compliant with VESA DMT 1.0 and VESA GTF 1.0 specifications DDC2B+ Monitor support on all OS platforms ACPI Version 1.0b Power Management support (all modes)
	AGP1x/2x/4x/8x Version 3.0 compliant including	Sideband Addressing AGP Texturing (Execute Mode) AGP Read and AGP Write Support 8X Fast write support
FGL 9700 GPU featuring:	VGA controller supporting full standard feature set 2D Engine with 128-bit datapath processing multiple pixels per clock PIXEL TAPESTRY III, 3D rendering engine utilizing 2 parallel pipelines with two texture blending units each capable, of handling up to 8 texels in a single pass, delivering 2.4 Gigatexels/s fill rate CHARISMA ENGINE III, geometry unit utilizing 4 vertex processing engines, capable of executing two instructions per clock cycle each, thus yielding up to 200 million transformed, clipped and lit triangles per second. VIDEO IMMERSION III, industry leading video technology supporting MPEG 2 encode/decode Dual independent display controllers with 4K x 4K address space each of up to 20 GB per second	
Supported graphics APIs	OpenGL 1.3 ICD with immediate mode support for all OGL primitive types DirectX 8.1	
Available graphics drivers	Windows 2000 Windows XP Linux HP qualified drivers may be preloaded or available from the HP support web site: See: http://h20000.www2.hp.com/bizsupport/TechSupport/Product.jsp?prodTypeld=12454&prodCatId=296719&locale=en_US&taskId=135	

Technical Specifications

ATI Fire GL Z1-128p
Graphics Card display,
resolutions & refresh rates

CRT Display (Single or Dual)		
Resolution	Maximum Refresh Rate	Bits per Pixel
640x480	100Hz	16, 24, 32
800x600	100Hz	16, 24, 32
1024x768	100Hz	16, 24, 32
1152x864	100Hz	16, 24, 32
1280x960	100Hz	16, 24, 32
1280x1024	100Hz	16, 24, 32
1600x1000	100Hz	16, 24, 32
1600x1024	76Hz	16, 24, 32
1600x1200	100Hz	16, 24, 32
1792x1344	100Hz	16, 24, 32
1920x1080	100Hz	16, 24, 32
1920x1200	100Hz	16, 24, 32
2048x1536	85Hz	16, 24, 32

Digital Display (Single or Dual)		
Single CRT Display Resolution	Maximum Refresh Rate	Bits per Pixel
640x480	75Hz	16, 24, 32
800x600	75Hz	16, 24, 32
1024x768	75Hz	16, 24, 32
1280x1024	75Hz	16, 24, 32
1600x1000	60Hz	16, 24, 32
1600x1200	60Hz	16, 24, 32
1920x1080	60Hz	16, 24, 32
1920x1200	60Hz	16, 24, 32

Technical Specifications

NVIDIA Quadro4 980 XGL Graphics Card	Form Factor	ATX
	Graphics Controller	NVIDIA NV25GL GPU
	Bus Type	AGP 8X
	RAMDAC	Dual 350MHz integrated
	Memory	128MB DDR SDRAM unified frame buffer, Z-buffer and Texture storage
	Connectors	2 DVI-I analog/digital monitor outputs, 1 3-pin Mini DIN stereo output
	Dimensions	AGP full height ATX card. 4.25 x 8.5 in/10.80 x 21.59 cm
	Multi-monitor support	Dual integrated display controllers supporting up to 1920x1440 @ 85Hz on both displays
	Additional product features	128 MB DDR SDRAM unified frame buffer, Z-buffer and Texture storage 128 KB BIOS 3.3V Flash ROM reprogrammable by SW Hardware Overlay Planes Hardware two-sided lighting Hardware accelerated antialiased points and lines Quad-buffered Stereo Diamond exit rule line rasterization for improved line quality 3D Texture support Occlusion Culling Frame synchronization Compliant with Microsoft/Intel PC2001 Workstation requirements Video Timings compliant with VESA DMT 1.0 and VESA GTF 1.0 specifications DDC2B+ Monitor support on all OS platforms ACPI Version 1.0b Power Management support (all modes)
	AGP1x/2x/4x Version 2.0 compliant including	Sideband Addressing AGP Texturing (Execute Mode) Fast writes support
NV25GL GPU featuring:	300 MHz engine clock rate 325 MHz memory clock rate 128-bit memory interface VGA controller 4 parallel pixel pipelines 2 parallel geometry engines nfiniteFX II programmable vertex and pixel shader technology	
Supported graphics APIs	OpenGL 1.3 ICD with immediate mode support for all OGL primitive types DirectX 8	
Available graphics drivers	HP-tested Windows XP HP-tested Windows 2000 HP-tested Linux HP qualified drivers may be preloaded or available from the HP support Web site: http://www.hp.com/workstations/support	

Technical Specifications

NVIDIA Quadro4 980 XGL Graphics Card display resolutions & refresh rates	MONITOR 1, 2 ANALOG/DIGITAL		
	Resolution	Maximum Refresh Rate	Bits per Pixel
	640x480	240Hz/240Hz	8, 16, 24
	800x600	240Hz/200Hz	8, 16, 24
	1024x768	170Hz/140Hz	8, 16, 24
	1152x864	170Hz/100Hz	8, 16, 24
	1280x720	150Hz/120Hz	8, 16, 24
	1280x960	150Hz/85Hz	8, 16, 24
	1280x1024	150Hz/75Hz	8, 16, 24
	1600x900	120Hz/75Hz	8, 16, 24
	1600x1024	100Hz/72Hz	8, 16, 24
	1600x1200	120Hz/60Hz	8, 16
	1600x1200	100Hz/60Hz	24
	1920x1080	100Hz/ NoDigitalDisplaySupport	8, 16
	1920x1080	85Hz/ NoDigitalDisplaySupport	24
	1920x1200	100Hz/ NoDigitalDisplaySupport	8, 16
	1920x1200	85Hz/ NoDigitalDisplaySupport	24
	1920x1440	85Hz/ NoDigitalDisplaySupport	8, 16
	1920x1440	75Hz/ NoDigitalDisplaySupport	24
	2048x1536	75Hz/ NoDigitalDisplaySupport	8, 16
	2048x1536	60Hz/ NoDigitalDisplaySupport	24

Technical Specifications

3Dlabs Wildcat III 6110 Graphics Card	Form Factor	ATX
	Graphics Controller	3Dlabs' multi-chip design feature separate Bus Controller and Geometry/Rasterizer GPU
	Bus Type	AGP-Pro50/4x. Version 2.0 Compliant.
	RAMDAC	Dual 300 MHz
	Memory	64 MB DDR SDRAM frame buffer, Z-buffer. 128MB DDR SDRAM Texture storage. 16MB Direct Burst Memory
	Connectors	2 DVI-I analog/digital monitor outputs, 1 3-pin Mini DIN stereo output
	Dimensions	AGP-Pro50 full height/length card.
	Multi-monitor support	Dual monitor
	Additional product features	64 MB DDR SDRAM frame buffer, Z-buffer storage. Allocated as 32MB/display when operating in dual display mode. Hardware Overlay Planes Quad-buffered, frame-sequential and interlaced Stereo Occlusion Culling Frame synchronization DDC Monitor support ACPI Version 1.0b Power Management support (D1, D2, D3)
	AGP1x/2x/4x Version 2.0 compliant including:	Sideband Addressing AGP Texturing (Execute Mode) Fast writes support
Geometry Acceleration Featuring:	Model view matrix transformation of vertex and normal coordinates Texture matrix transformation of texture coordinates Full lighting calculations. Up to 32 lights. Local Display List and processing	
2D Acceleration Featuring:	16/32-bit Color Depths Area Fills, Block Moves, Vectors, Bilinear Scaling	
"SuperScene" Full Scene Antialiasing Featuring:	Point sampled with 16 samples Dynamic sample allocation and backoff Sample location jittering 1D, 2D, 3D and 4D texturing Multi-texture support 2 video look-up tables 10-bit gamma correction Hardware Cursor	
Product Compliance Features	Compliant with Microsoft/Intel PC2001 Workstation requirements Video Timings compliant with VESA DMT 1.0 and VESA GTF 1.0 specifications	
Supported graphics APIs	OpenGL 1.3 Complaint DirectX 7 Compliant	
Available graphics drivers	HP-tested Windows XP HP-tested Windows 2000 HP qualified drivers may be preloaded or available from the HP support Web site: http://www.hp.com/workstations/support	

Technical Specifications

3DLabs Wildcat III 6110 Graphics
Card display resolutions &
refresh rates

HIGHEST RESOLUTIONS AVAILABLE FOR SINGLE DISPLAY

Resolution	Maximum Refresh Rate	Bits per Pixel
1920x1440	75Hz	24
1600x1280	76Hz	24
2048x1152	75Hz	24
1920x1200	76Hz	24

HIGHEST RESOLUTIONS AVAILABLE FOR SINGLE DISPLAY STEREO

Single CRT Display Resolution	Maximum Refresh Rate	Bits per Pixel
1280x1024	60Hz	24
1280x960	60Hz	24

HIGHEST RESOLUTIONS AVAILABLE FOR SINGLE DISPLAY AND FULL SCENE ANTIALIASING

Resolution	Maximum Refresh Rate	Bits per Pixel
1200x900	60Hz	24
1376x768	60Hz	24
1280x800	90Hz	24
1920x1200	76Hz	24

HIGHEST RESOLUTIONS AVAILABLE FOR SINGLE DISPLAY STEREO AND FSAA

Resolution	Maximum Refresh Rate	Bits per Pixel
1024x768	60Hz	24

HIGHEST RESOLUTIONS AVAILABLE FOR DUAL DISPLAY

Resolution	Maximum Refresh Rate	Bits per Pixel
1600x1200	90Hz	24
1600x1280	76Hz	24
1920x1080	85Hz	24
1824x1128	75Hz	24

HIGHEST RESOLUTIONS AVAILABLE FOR DUAL DISPLAY STEREO

Resolution	Maximum Refresh Rate	Bits per Pixel
1024x768	60Hz	24

HIGHEST RESOLUTIONS AVAILABLE FOR DIGITAL OUTPUT

Resolution	Maximum Refresh Rate	Bits per Pixel
1600x1200	60Hz	24

Technical Specifications

ATI FIRE GL X-256p Graphics Card	Form Factor	ATX
	Graphics Controller	ATI FGL 9700 GPU
	Bus Type	AGP-Pro50 1x/2x/4x/8x Version 3.0 compliant
	RAMDAC	Dual 400MHz / 30-bit
	Memory	256MB DDR SDRAM unified frame buffer, Z-buffer and Texture storage
	Connectors	Dual DVI-I analog/digital monitor outputs
	Dimensions	Single AGP/ATX card. 230.28mm x 107.96mm
	Multi-monitor support	Dual Screen output for resolutions up to 2x2048x1536x32 bit
	Additional product features	256MB DDR SDRAM unified frame buffer, Z-buffer and Texture storage 64 KB BIOS Serial Flash ROM, reprogrammable by SW, 3.3V only, no Jumpers 2D and 3D acceleration provided for 16-bit and 32-bit RGB α modes Hardware cursor with full color alpha channel 16/32 bit Z buffer, 16/32 bit W-buffer, 8-bit stored alpha and 8-bit Stencil planes Bus mastering support for 2D/3D display lists and local memory vertex list execution Hardware lighting support for up to 8 lights Bilinear, Trilinear and Anisotropic texturing Cubic Environment and Perturbation Bump Mapping Projective Texture, 3D Texture and Video Texture support Full Scene Anti-Aliasing (FSAA) support with up to 6 subsamples Video Engine supports YCrCb (4:2:2, 4:1:0, 4:2:0) to RGB conversion Video scaling and up to 4x4 tap filtering supported for all YUV and RGB16/32 formats Per pixel quad buffering on all screen resolutions VESA compliant Stereoscopic Interface on MiniDin Connector Compliant with Microsoft/Intel PC2001 Workstation requirements Video Timings compliant with VESA DMT 1.0 and VESA GTF 1.0 specifications DDC2B+ Monitor support on all OS platforms ACPI Version 1.0b Power Management support (all modes)
	AGP1x/2x/4x/8x Version 3.0 compliant including:	Sideband Addressing AGP Texturing (Execute Mode) AGP Read and AGP Write Support 8X Fast write support
FGL 9700 GPU featuring:	VGA controller supporting full standard feature set 2D Engine with 128-bit datapath processing multiple pixels per clock PIXEL TAPESTRY III, 3D rendering engine utilizing 2 parallel pipelines with two texture blending units each capable, of handling up to 8 texels in a single pass, delivering 2.4 Gigatexels/s fill rate CHARISMA ENGINE III, geometry unit utilizing 4 vertex processing engines, capable of executing two instructions per clock cycle each, thus yielding up to 200 million transformed, clipped and lit triangles per second. VIDEO IMMERSION III, industry leading video technology supporting MPEG 2 encode/decode Dual independent display controllers with 4K x 4K address space each 256-bit external frame buffer interface providing memory bandwidth of up to 20 GB per second	
Supported graphics APIs	OpenGL 1.3 ICD with immediate mode support for all OGL primitive types DirectX 8.1	
Available graphics drivers	Windows 2000 Windows XP Linux See: http://www.hp.com/workstations/support	

Technical Specifications

ATI FIRE GL X1 Graphics Card
display resolutions & refresh
rates

CRT DISPLAY (SINGLE OR DUAL)

Resolution	Maximum Refresh Rate	Bits per Pixel
640x480	100Hz	16, 24
800x600	100Hz	16, 24
1024x768	100Hz	16, 24
1152x864	100Hz	16, 24
1280x960	100Hz	16, 24
1280x1024	100Hz	16, 24
1600x1000	100Hz	16, 24
1600x1024	76Hz	16, 24
1600x1200	100Hz	16, 24
1792x1344	100Hz	16, 24
1920x1080	100Hz	16, 24
1920x1200	100Hz	16, 24
2048x1536	85Hz	16, 24

DIGITAL DISPLAY (SINGLE OR DUAL)

Single CRT Display Resolution	Maximum Refresh Rate	Bits per Pixel
640x480	75Hz	16, 24
800x600	75Hz	16, 24
1024x768	75Hz	16, 24
1280x1024	75Hz	16, 24
1600x1000	60Hz	16, 24
1600x1200	60Hz	16, 24
1920x1080	60Hz	16,24
1920x1200	60Hz	16, 24

Technical Specifications

NVIDIA Quadro FX2000	Form Factor	ATX
	Graphics Controller	NVIDIA NV30GL GPU
	Bus Type	AGP 8X Version 3.0 compliant
	RAMDAC	Dual 400MHz integrated
	Memory	128MB DDR2 SDRAM unified frame buffer, Z-buffer and Texture storage
	Connectors	2 DVI-I analog/digital monitor outputs, 1 3-pin Mini DIN stereo output
	Multi-monitor support	Dual integrated display controllers supporting up to 2048x1536 @ 85Hz on both displays
	Additional product features	128 MB DDR2 SDRAM unified frame buffer, Z-buffer and Texture storage 128 KB BIOS 3.3V Flash ROM reprogrammable by SW Hardware Overlay Planes Hardware two-sided lighting Hardware accelerated antialiased points and lines Quad-buffered Stereo Diamond exit rule line rasterization for improved line quality 3D Texture support Occlusion Culling Dual Link DVI on one output enabling driving digital displays up to 2048x1536 Compliant with Microsoft/Intel PC2001 Workstation requirements Video Timings compliant with VESA DMT 1.0 and VESA GTF 1.0 specifications DDC2B+ Monitor support on all OS platforms ACPI Version 1.0b Power Management support (all modes)
	AGP8xVersion 3.0 compliant including:	Sideband Addressing AGP Texturing (Execute Mode) Fast write support
	NV30GL GPU featuring:	400 MHz engine clock rate 400 MHz memory clock rate 128-bit memory interface VGA controller 8 parallel pixel pipelines 3 parallel geometry engines nfiniteFX II programmable vertex and pixel shader technology
	Supported graphics APIs	OpenGL 1.3 ICD with immediate mode support for all OGL primitive types DirectX 8,9
	Available graphics drivers	Windows 2000 Windows XP HP-tested Linux HP qualified drivers may be preloaded or available from the HP support web site: See: http://h20000.www2.hp.com/bizsupport/TechSupport/Product.jsp?prodTypeId=12454&prodCatId=296719&locale=en_US&taskId=135 See: http://www.hp.com/workstations/support

Technical Specifications

NVIDIA Quadro FX2000 Display Resolutions & Refresh Rates	MONITOR 1, 2 ANALOG/DIGITAL		
	Resolution	Maximum Refresh Rate	Bits per Pixel
	640x480	240Hz/240Hz	8, 16, 32
	800x600	240Hz/200Hz	8, 16, 32
	1024x768	200Hz/140Hz	8, 16, 32
	1152x864	170Hz/100Hz	8, 16, 32
	1280x720	150Hz/120Hz	8, 16, 32
	1280x960	150Hz/85Hz	8, 16, 32
	1280x1024	150Hz/85Hz	8, 16, 32
	1600x900	120Hz/75Hz	8, 16, 32
	1600x1024	100Hz/72Hz	8, 16, 32
	1600x1200	120Hz/60Hz	8, 16
	1600x1200	100Hz/60Hz	32
	1920x1080	100Hz/60Hz in Dual Link Mode	

Technical Specifications

HP L1825 Flat Panel Monitor (Carbon/Silver)	Display Type	TFT large viewing angle
	Viewable Image Size	18.1 in/45.9 cm, maximum viewable
	Screen Opening (W x H)	14.2 x 11.4 in/36.2 x 28.9 cm
	Viewing Angle	160 degrees horizontal/160 degrees vertical (10:1 minimum contrast ratio)
	Pixel Pitch	.281 mm
	Pixel Clock Speed	135 MHz
	Brightness	250 nits (cd/m ²)
	Contrast Ratio	350:1 (typical)
	Response Rate	30 ms (typical rise + fall)
	Horizontal Frequency (kHz)	30 to 82 kHz
	Vertical Frequency (Hz)	56 to 75 Hz
	Color Depth Support	16.7 million colors
	Graphics Controller	Genesis gm5020
	Factory Preset Modes	15
	Graphic Preset Modes (non-interlaced)	640 x 480 @ 60 Hz, 72 Hz, 75 Hz 800 x 600 @ 56 Hz, 60 Hz, 75Hz 1024 x 768 @ 60 Hz, 75 Hz 1280 x 1024 @ 60 Hz, 75 Hz
	Mac Compatible Modes (adapter required)	832 x 624 @ 75 Hz 1152 x 870 @75 Hz
	Text Mode	720 x 400 @ 70 Hz
	VGA Mode	640 x 480 @ 60 Hz, 72 Hz
	User-Programmable Modes	15
	Anti-Glare/Anti-Static	Yes/Yes
	Asset Control	Yes (accessible on HP desktops featuring Intelligent Manageability)
	Plug and Play	Yes (supports VESA DDC2B; PC2001 compliant)
	Protective Panel	No
	Kensington Lock-ready	Yes
	Accessories Included	VGA cable, DVI-D cable
	VESA Mounting	100 mm x 100 mm screw-mounting option; pedestal is attached
	VESA External Mounting	Yes (standard 4-hole pattern, 100 mm)
	Detachable Base	Yes
	Tilt	Yes (-5° to +35°)
	Swivel	Yes (-35° to +35°)
	Height Adjustable	Yes (130 mm adjustment range)
	Portrait Mode Supported	Yes
	Touchscreen Option	No
Fail Safe Mode	Yes	
Icon Based On-Screen Controls	Yes	

Technical Specifications

HP L1825 Flat Panel Monitor (Carbon/Silver) <i>(continued)</i>	User Controls	Brightness, contrast	Yes
		Positioning	Yes
		Color temperature	Yes (6500k, 9300k, User)
		Individual color control	Yes
		Serial number display	Yes
		Full screen resolutions	Yes (640 x 480, 800 x 600)
		Clock	Yes
		Clock phase	Yes
		Monitor management	No
		Recall	No
	Audio recall	No	
	Input selection	Yes	
	Factory reset	Yes	
	Language Selection	English	Yes
		Spanish	Yes
		French	Yes
		German	Yes
		Simplified Chinese	Yes
		Italian	Yes
	Agency Approvals/Certifications	Australian ACA Approval	Yes
Canadian Requirements/CSA		Yes	
CE Marking		Yes	
China CCIB/CCEE Approval		Yes	
CISPR Requirements		Yes	
Eastern European Approvals		Yes	
Energy Star Compliant		Yes	
FCC Approval		Yes	
German Ergonomic (TUV and GS Mark)		Yes	
ISO 9241-3,7,8 VDT Guidelines		Yes	
ISO 13406-2 Compliant (Pixel Defect Guidelines)		Yes	
Mexican NOM Approval		Yes	
MIC Requirements (New Zealand)		Yes	
MPR-II Compliant		Yes	
Nordic Approvals (Nemko, Fimko, Demko, Semko)		Yes	
PC2001 Compliant		Yes	
PC99 Certified		Yes	
S. Korean MIC Approval		Yes	
Taiwan BSMI Approval		Yes	
TCO 99 (emissions, ergonomics, environment)		Yes	
TUV-Ergo		Yes	
UL Listed		Yes	
VCCI Approvals		Yes	
Windows Certification	Microsoft Windows 98, Windows 2000, and Windows XP		
Input Impedance	75 ohms \pm 10%		
Input Signal	Two connectors: one 15-pin mini D-sub analog VGA; and one DVI-I (VGA analog or digital)		

Technical Specifications

HP L1825 Flat Panel Monitor (Carbon/Silver) <i>(continued)</i>	Sync Input	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green	
	Power Supply ALS	Auto-ranging, 90 to 264 VAC; internal power supply, 60 Hz	
	Power Rating	Maximum Mode	< 60 W
		Power Saving Mode	< 5 W
		Off Mode	< 5 W
	Dimensions (H x W x D)	With stand - min height	14.8 x 15.8 x 8.2 in/37.6 x 40.2 x 20.8 cm
		With stand - max height	19.9 x 15.8 x 8.2 in/50.6 x 40.2 x 20.8 cm
		Without stand	13.5 x 15.8 x 2.9 in/34.2 x 40.2 x 7.3 cm
	Approximate Weight	With height-adjustable stand	22.9 lb/10.4 kg
		Without stand	13.6 lb/6.2 kg
	Temperature	Operating	32° to 95° F/0° to 35° C
		Non-operating	-4° to 140° F/-20° to 60° C
	Humidity	Operating	20% to 80%
		Non-operating	8% to 85%
	Warranty	Limited three years parts, labor, and on-site service, including backlight. Availability varies by region. Consult HP Customer Service for details.	
Graphic Controller Compatibility	Compatible with "VESA Video Signal Standard (VSI) Compliant" video cards. NOTE: Features are subject to change without notice.		

Technical Specifications

HP L1925 Flat Panel Monitor (Carbon/Silver)	Panel	Type	Thin film transistor (TFT)
		Viewable Image Area (diagonal)	19 in (48.25 cm) maximum viewable
		Screen Opening (W x H)	14.9 x 11.9 in (37.8 x 30.3 cm)
		Viewing Angle (typical)	170 degrees horizontal/170 degrees vertical (10:1 minimum contrast ratio)
		Brightness (typical)	Up to 250 nits (cd/m ²)
		Contrast Ratio (typical)	Up to 500:1 (typical)
		Response Rate (typical)	<20 ms (typical rise + fall)
		Pixel Pitch	0.294 mm
		Color Depth Support	16.7 million colors
	Video Input	Plug and Play	Yes (supports VESA DDC2B; PC2001 compliant)
Input Signal		Two connectors: one 15-pin mini D-sub analog VGA; and one DVI-I (VGA analog or digital)	
Input Impedance		75 ohms ± 2%	
Sync Input		Separate sync (HSYNC/VSYNC); composite sync, Sync on Green	
Video Cable		VGA and DVI-D	
Video Cable Length		78 in (2.0 m)	
Signal Interface/ Performance	Horizontal Frequency	30 to 82 kHz	
	Vertical Frequency	56 to 75 Hz	
	Graphics Controller	Pixelworks 131	
	Native Resolution	1280x1024@75Hz analog 1280x 1024@60Hz digital	
	Maximum Resolution (Analog)	1280x1024@75Hz analog	
	Maximum Resolution (Digital)	1280x1024@75Hz analog	

Technical Specifications

HP L1925 Flat Panel Monitor (Carbon/Silver) <i>(continued)</i>	On Screen Display (OSD) Controls	Preset VESA Graphic Modes (non-interlaced)	640 x 480 @ 60 Hz, 72 Hz, 75 Hz 800 x 600 @ 60 Hz, 72 Hz, 75Hz 1024 x 768 @ 60 Hz, 75 Hz 1280 x 1024 @ 60 Hz, 75 Hz
		Preset MAC Mode	832 x 624 @ 75 Hz 1152 x 870 @75 Hz
		Preset VGA Mode	640 x 480 @ 60 Hz, 72 Hz
		Preset SUN Mode	1152x900@66Hz
		Fail Safe Mode	Yes (limits out of range signal messages)
		Maximum Pixel Clock Speed	140 MHz
		User Programmable Modes	Yes, 10
		Anti-Glare	Yes
		Anti-Static	Yes
		Asset Control	Yes (accessible on HP/Compaq desktops featuring Intelligent Manageability)
		Default Color Temperature	Yes (6500k, 9300k, Custom User)
		Buttons or Switches	Power on/off; 4-button OSD; second level OSD buttons include auto adjust and dual-input switch
		Languages	English, Spanish, French, German, Dutch, Italian
		User Controls	Size and Positioning Contrast Brightness Clock, Clock Phase Selectable Color Temperature Input Selection Factory Reset Individual Color Contrast Full-screen Resolution

Technical Specifications

HP L1925 Flat Panel Monitor (Carbon/Silver) <i>(continued)</i>	Power	Power Supply	Auto-ranging, 90 to 265 VAC; internal power supply, 47.5-63 Hz	
		Input Power	100 ~ 240 VAC	
		Nominal Current	1.5 A maximum	
		Frequency	50 ~ 60 Hz	
		Average	33 watts when displaying standard office software	
		Maximum	< 40 watts	
		Power Saving	< 2 watts	
		Off Mode	< 1 watts (switch off)	
		Power Cable Length	70 in (1.8 m); non-captive	
		Mechanical	Dimensions (H x W x D)	Unpacked w/ stand minimum height
Unpacked w/ stand maximum height	20 x 16.4 x 8.2 in (50.8 x 41.6 x 20.8 cm)			
Base Area (Footprint d x w)	8.2 x 12.2 in (20.8 x 30.9 cm)			
Panel only (w/o stand) (h x w x d)	13.5 x 16.4 x 2.6 in (34.2 x 41.6 x 6.6 cm)			
Packaged	26.0 x 26.0 x 26.0 in (66.0 x 66.0 x 66.0 cm)			
Weight	Unpacked w/ stand			7.6 lb (8 kg)
	Unpacked w/o stand			2 lb (5.5 kg)
	Packaged			13.5 lb (10.7 kg)
Tilt Range	-5 degrees to +20 degrees			
Swivel Range	± 45 degrees horizontal swivel			
Height Adjustable	Yes (4.3 in/110 mm adjustment range)			
Pivot Rotation	Yes, 90 degrees			
Base	Ships attached and is removable after installation			
Environmental	Temperature – Operating	41° to 95° F (5° to 35° C)		
	Temperature – Non-operating	-4° to 140° F (-20° to 60° C)		
	Humidity – Operating	20% to 80%		
	Humidity – Non-operating	5% to 95%		
	Altitude – Operating	0 to 13,000 ft (0 to 4,000 m)		
	Altitude – Non-operating	0 to 40,000 ft (0 to 12,192 m)		

Technical Specifications

HP L1925 Flat Panel Monitor (Carbon/Silver) <i>(continued)</i>	Options	PC Comm Station	Communication/audio hub that includes two stereo speakers (8 PMPO each), integrated microphone/dual function headset (phone and PC support), and USB port. Optional, part number 304251-008 (US) or P8814A (EMEA).
	Other	Accessories Included	VGA cable, DVI-D cable, user CD-ROM with Portrait software
		User Guide Languages	English
		Warranty Languages	English
		Color	Carbon/Silver
		VESA Mounting	Yes (swing arm/ wall mount not included; base is shipped attached and must be removed for mounting options)
		VESA External Mounting	Yes (Standard 4 hole pattern, 100 mm)
		Kensington Lock-ready	Yes
	Certification and Compliance	Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCIB/CCEE Approval, CISPR Requirements, Eastern European Approvals, Energy Star Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 9241-3,7,8 VDT Guidelines, ISO 13406-2 Compliant (Pixel Defect Guidelines), Mexican NOM Approval, MIC Requirements (New Zealand), MPR-II Compliant, Nordic Approvals (Nemko, Fimko, Demko, Semko), PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 03 (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Windows Certification	
	Compatibility	VESA Video Signal Standard (VSIS) Compliant video cards have been tested and proven compatible for use with the HP Flat Panel Monitor L1925. The HP L1925 has been tested for use with Compaq Evo PCs and Thin Clients and Compaq D315 Business PCs. NOTE: Features are subject to change without notice.	
	Service and Warranty	Limited three-year parts and repair labor, service provider labor, and on-site service. Next Business Day advanced exchange direct replacement service available during warranty period. Certain restrictions and exclusions apply. For details, contact HP Customer Support at 970-635-1000 (USA) or 905-206-4663 (Canada).	

Technical Specifications

HP L2025 Flat Panel Monitor (Carbon/Silver)	Display Type	TFT large viewing angle
	Viewable Image Size	20.1 in/51 cm maximum viewable
	Screen Opening (W x H)	16.2 x 22 in/41.1 x 30.9 cm
	Viewing Angle	170 degrees horizontal/170 degrees vertical (10:1 minimum contrast ratio)
	Pixel Pitch	0.255 mm
	Pixel Clock Speed	202 MHz
	Brightness	250 nits (cd/m ²) typical
	Contrast Ratio	350:1 typical
	Response Rate	25 ms typical (rise + fall)
	Color Depth Support	16.7 million colors
	Horizontal Frequency (kHz)	30 to 94 kHz (analog); 30 to 92 KHz (digital)
	Vertical Frequency (Hz)	56 to 85 Hz
	Graphics Controller	Pixelworks PW171
	Factory Preset Modes	18
	Graphic Preset Modes (non-interlaced)	1600 x 1200 @ 60 Hz, 75 Hz 1280 x 1024 @ 60 Hz, 75Hz, 85 Hz 1280 x 960 @ 60 Hz 1152 x 900 @ 66 Hz
	Mac or Other Compatible Modes (adapter may be required)	832 x 624 @ 75 Hz 1152 x 870 @ 75 Hz
	Text Mode	720 x 400 @ 70 Hz
	VGA Mode	640 x 480 @ 60 Hz
	User-Programmable Modes	18
	Anti-Glare/Anti-Static	Yes/Yes
	AssetControl	Yes (accessible on HP desktops featuring Intelligent Manageability)
	Plug and Play	Yes
	Kensington Lock-ready	Yes
	Accessories Included	VGA cable, DVI-D cable
	Protective Panel	No
	VESA Mounting	100 mm x 100 mm screw-mounting option; pedestal is attached
	VESA External Mounting	Yes (Standard 4 hole pattern, 100 mm)
	Portrait Mode Supported	No
	Touchscreen Option	No
	Detachable Base	Yes
	Tilt	Yes (-5° to +35°)
	Swivel	Yes (-35° to +35°)
	Height Adjustable	Yes (130 mm adjustment range)
Fail Safe Mode	Yes	
Icon Based On-Screen Display Controls	Yes	

Technical Specifications

HP L2025 Flat Panel Monitor (Carbon/Silver)(continued)	User Controls	Brightness, contrast	Yes
		Positioning	Yes
		Color temperature	Yes (6500k, 9300k, User)
		Individual color control	Yes
		Serial number display	Yes
		Full screen resolutions	Yes (640 x 480, 800 x 600)
		Clock	Yes
		Clock phase	Yes
		Monitor management	No
		Recall	No
		Audio recall	No
		Video PIP	Yes (size and position)
		Input selection	Yes (includes separate direct access key for dedicated swap between inputs 1 and 2)
		Factory reset	Yes
Language Selection	English	Yes	
	Spanish	Yes	
	French	Yes	
	German	Yes	
	Simplified Chinese	Yes	
	Italian	Yes	
	Agency Approvals/Certifications	Australian ACA Approval	Yes
Canadian Requirements/CSA		Yes	
CE Marking		Yes	
China CCIB/CCEE Approval		Yes	
CISPR Requirements		Yes	
Eastern European Approvals		Yes	
Energy Star Compliant		Yes	
FCC Approval		Yes	
German Ergonomic (TUV and GS Mark)		Yes	
ISO 9241-3,7,8 VDT Guidelines		Yes	
ISO 13406-2 Pixel Defect Guidelines		Yes	
Mexican NOM Approval		Yes	
MIC Requirements (New Zealand)		Yes	
MPR-II Compliant		Yes	
Nordic Approvals (Nemko, Fimko, Demko, Semko)		Yes	
PC2001 Compliant		Yes	
PC99 Certified		Yes	
S. Korean MIC Approval		Yes	
Taiwan BSMI Approval		Yes	
TCO 99 (emissions, ergonomics, environment)		Yes	
TUV-Ergo		Yes	
UL Listed		Yes	
VCCI Approvals	Yes		
Windows Certification	Microsoft Windows 98, Windows 2000, and Windows XP		

Technical Specifications

HP L2025 Flat Panel Monitor (Carbon/Silver)(continued)	Input Impedance	75 ohms \pm 10%	
	Input Signal	Four connectors, including one 15-pin mini D-sub VGA; one DVI-I (VGA analog and digital input), one composite video, and one s-video	
	Sync Input	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green	
	Power Supply ALS	Auto-Ranging, 90 to 264 VAC; internal power supply, 60 Hz	
	Power Rating	Maximum Mode	< 70 W
		Power Saving Mode	< 5 W
		Off Mode	< 5 W
	Dimensions (H x W x D)	With Stand - Min height	16.3 x 19.2 x 8.2 in/41.4 x 48.8 x 20.8 cm
		With Stand - Max height	21.4 x 19.2 x 8.2 in/54.4 x 48.8 x 20.8 cm
		Without Stand	16.1 x 19.2 x 3.0 in/40.8 x 48.8 x 7.6 cm
	Approximate Weight	With height-adjustable stand	26.4 lb/12 kg
		Without stand	17.2 lb/7.8 kg
	Temperature	Operating	46° to 95° F/10° to 35° C
		Non-operating	6° to 140° F/-10° to 60° C
	Humidity	Operating	20% to 80%
		Non-operating	5% to 85%
	Warranty	Three-year limited warranty parts, including backlight and on-site labor or 48 hour direct unit replacement. Certain restrictions apply. Some terms vary depending on sales region. Consult HP Customer Service for details.	
	Graphic Controller Compatibility	Compatible with "VESA Video Signal Standard (VSI) Compliant" video cards. NOTE: Features are subject to change without notice.	

Technical Specifications

HP p930 CRT Monitor (Carbon/Silver)	Tube Type	Diamondtron Natural Flat (NF) aperture grille tube; anti-reflection, anti-static	
	Picture Tube Size (diagonal)	19 in/48.26 cm	
	Viewable Image Area (diagonal)	18 in/45.72 cm	
	Aperture Grille Pitch	0.24 mm	
	Horizontal Frequency (kHz)	30 to 110 kHz	
	Vertical Frequency (Hz)	50 to 160 Hz	
	Maximum Resolution	1920 x 1440 @ 60 Hz	
	Preferred Flicker Free Resolution	1280 x 1024 @ 85 Hz	
	Graphic Preset Modes (non-interlaced)	1600 x 1200 @ 85 Hz and 75 Hz 1280 x 1024 @ 85 Hz and 75 Hz 1024 x 768 @ 85 Hz 800 x 600 @ 85 Hz 640 x 480 @ 85 Hz and 60 Hz 720 x 400 @ 70 Hz	
	User-Modes	Yes, 8 modes	
	Anti-Glare/Anti-Static	Yes/Yes	
	Asset Control	Yes	
	Plug and Play	VESA DDC2B; PC2001 compliant	
	Front Panel User Controls	Power on/off; menu button; 4 OSD adjustment buttons; OSD exit button, information button	
	On-Screen User Controls	Brightness, Contrast	Yes
		Size and Positioning	Yes
		Pincushion (barrel)	Yes
		Trapezoid	Yes
		Moiré Correction	Yes
		Tilt (rotation)	Yes
		Selectable Color Temperature	Yes
		Factory Reset/Recall	Yes
Orthogonality		Yes	
Current Display Mode		Yes	
Degauss		Yes	
Convergence		Yes	
Approvals/Certifications	UL/CSA/CUL Approval	Yes	
	ISO9241-3, -7, -8 VDT Guidelines Approval	Yes	
	MPR-II Compliant	Yes	
	TCO '99	Yes	
	FCC Approval	Yes	
	Microsoft WHQL Certified	Yes	
	Energy Star Compliant	Yes	
	CE Compliant	Yes	
Signal Cable	Attached 15-pin D-sub connector, 5.9 feet (1.8 meter)		
Maximum Pixel Clock Speed	290 MHz		
Power Supply	Universal; 100–240 V (auto-ranging), 50–60 Hz		
Maximum Power Rating	≤ 120 watts		
Low Power Sleep Mode	< 3 watts		

Technical Specifications

HP p930 CRT Monitor (Carbon/Silver) <i>(continued)</i>	Off Mode	0 watts	
	Dimensions (H x W x D)	Unpacked	18.8 x 18.5 x 18.5 in/47.6 x 46.9 x 46.9 cm
		Packaged	22.0 x 22.3 x 22.8 in/55.9 x 56.5 x 57.8 cm
	Weight	Unpacked	55 lb/24.9 kg
		Packaged	61 lb/27.7 kg
	Tilt/Swivel Base	-5 to +10 degrees vertical tilt; ±45 degrees horizontal swivel	
	Operating Temperature	50° to 95° F/10° to 35° C non-condensing	
	Operating Humidity	20% to 80% non-condensing	
	Warranty	Limited three-year parts and repair labor, three-year service provider labor, and three-year on-site service warranty. Next Business Day advanced exchange direct replacement service available during warranty period. Certain restrictions and exclusions apply. For details, contact HP Customer Support at 970-635-1000 (USA) or 905-206-4663 (Canada).	

Technical Specifications

HP p1130 CRT Monitor (Carbon/Silver)	Tube Type	FD Trinitron aperture grille tube	
	Picture Tube Size (diagonal)	21 in/53.3 cm	
	Viewable Image Area (diagonal)	19.8 in/50.3 cm	
	Aperture Grille Pitch	0.24 mm	
	Horizontal Frequency (kHz)	30 to 130 kHz	
	Vertical Frequency (Hz)	50 to 170 Hz	
	Maximum Resolution	2048 x 1536 @ 75Hz	
	Maximum Pixel Clock Speed	< 370 MHz	
	Preferred Flicker Free Resolution	1920 x 1440 @ 85 Hz	
	Graphic Preset Modes (non-interlaced)	1920 x 1440 @85Hz	
		1800 x 1440 @80Hz	
		1600 x 1200 @75, 85Hz	
		1280 x 1024 @75, 85Hz	
		1024 x 768 @75, 85Hz	
		800 x 600 @75, 85Hz	
		640 x 480 @65, 75 and 85Hz	
		640 x 400 @ 70Hz	
	User-Modes	8 preset modes and 10 additional modes	
	Anti-Glare/Anti-Static	Yes/Yes	
	AssetControl	Yes	
	Front Panel User Controls	Power on/off switch; 5-button OSD; dual-input switch	
	Languages	Nine	English, French, German, Spanish, Italian, Dutch, Swedish, Russian, Japanese
	On-Screen User Controls	Size and Positioning	Yes
		Contrast	Yes
		Brightness	Yes
		Moiré Correction	Yes
Tilt (rotation)		Yes	
Selectable Color temperature		Yes	
Orthogonality		Yes	
Degauss		Yes (automatic at power on; manual)	
Convergence (h/v/pre-set)		Yes	
Reset		Yes	
Approvals/Certifications		UL/CSA/CUL Approval	Yes
		ISO9241-3, -7, -8 VDT Guidelines	Yes
	MPR-II Compliant	Yes	
	TCO '99	Yes	
	FCC Approval	Yes	
	Microsoft WHQL Certified	Yes	
	Energy Star Compliant	Yes	
	CE Compliant	Yes	
Plug and Play	VESA DDC2Bi and DDC2B. PC2001 compliant		
Dual Input	Yes, two 15-pin D-sub connections		
Signal Cable	Detachable 15-pin D-sub mini connector		
Power Supply	Universal; 100–240 V (auto-ranging), 50–60 Hz		

Technical Specifications

HP p1130 CRT Monitor (Carbon/Silver) <i>(continued)</i>	Maximum Power Rating	135 watts	
	Low Power Sleep Mode	< 3 watts	
	Off Mode	0 watts	
	Dimensions (H x W x D)	Unpacked	19.7 x 19.6 x 19.3 in/50.2 x 49.7 x 49.0 cm
		Packaged	26.0 x 26.0 x 26.0 in/66.0 x 66.0 x 66.0 cm
	Weight	Unpacked	67.2 lb/30.5 kg
		Packaged	72.5 lb/32.9 kg
	Tilt/Swivel Base	-5 to +15 degrees vertical tilt; ±45 degrees horizontal swivel	
	Operating Temperature	50° to 104° F (10° to 40° C) non-condensing	
	Operating Humidity	10% to 80% non-condensing	
	Altitude	Operating	0 to 13,000 ft/0 to 4,000 m
		Non-Operating	0 to 50,000 ft/0 to 15,250 m
	Warranty	Limited three-year parts and repair labor, service provider labor, and on-site service. Next Business Day advanced exchange direct replacement service available during warranty period. Certain restrictions and exclusions apply. For details, contact HP Customer Support at 970-635-1000 (USA) or 905-206-4663 (Canada).	

HP recommends Microsoft® Windows® XP Professional for Business

© Copyright 2003 Hewlett-Packard Development Company, L.P.
The information contained herein is subject to change without notice.

Microsoft, Windows, and Windows NT are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Intel and Pentium are registered trademarks or trademarks of the Intel Corporation in the U.S. and/or other countries. All other product names mentioned herein may be trademarks of their respective companies.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.