


Overview

HP recommends Windows Vista™
Business

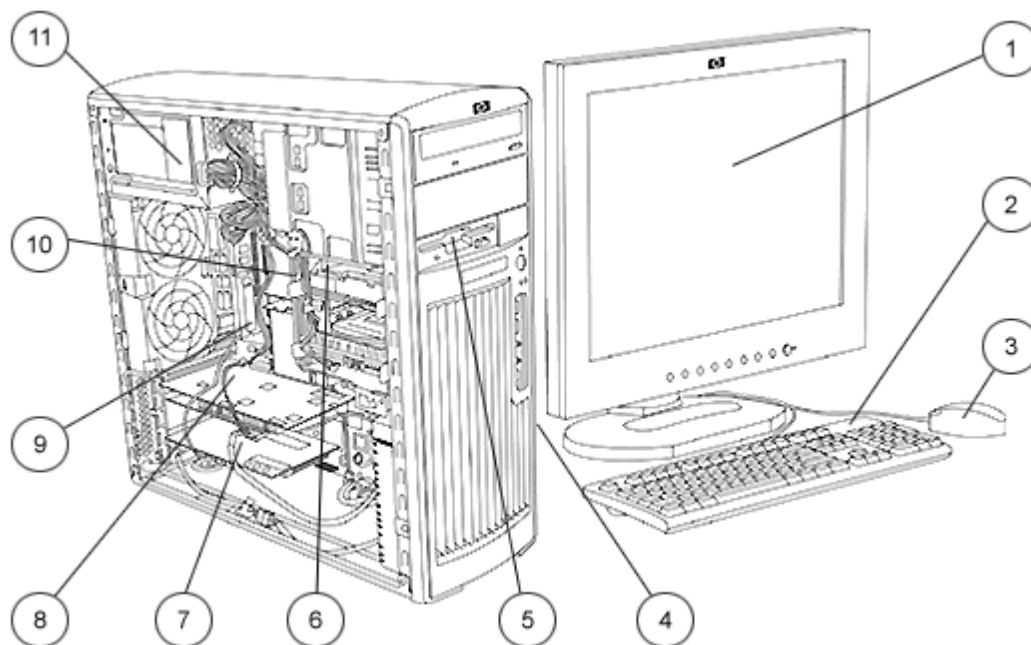

1. Monitor (sold separately)
2. 2004 Standard Keyboard
3. 2-Button Scroll Mouse
4. Front IO: 2 USB 2.0, IEEE-1394 (requires optional PCI card to enable), headphone and microphone
5. 3.5" external bay for optional diskette drive or other 3.5" device
6. 2 internal 3.5" bays, 2 external 5.25" bays
7. 4 PCI, 1 PCI Express 8x prime slots
8. 1 PCI Express x16 Graphics Bus
9. 6 USB 2.0, 1 standard serial port, 1 parallel port, 2 PS/2, 1 RJ-45, audio in/out
10. Dual 64-bit Intel® Xeon® processors
11. 500 watt power supply

Overview

At A Glance

- 64-bit Intel® Xeon® processors
- Choice of operating systems: Genuine Windows XP Professional, Genuine Windows XP Professional x64 Edition, Red Hat Linux Workstation 4
HP Linux Installer Kit (see <http://www.hp.com/workstations/software/linux/> for details)
- Up to 8 GB of DDR-2 memory
- PCI-Express I/O and graphics
- Integrated Broadcom NetXtreme Gigabit ethernet
- 800 MHz processor front side bus support
- Intel Hyper-Threading technology support
- SATA and Ultra 320 SCSI drives
- Digital AC97 integrated audio with internal speaker
- Pre-loaded Manageability tools
- Energy Star compliance with energy-saving features
- Protected by HP Services, including a 3-3-3 standard warranty. Terms and conditions vary by country. Certain restrictions and exclusions apply.

Standard Features - Custom Components

Processor and Speed – One of the following	64-bit Intel Xeon Processor with 800 MHz Front Side Bus
	2.80 GHz (2 MB L2 cache) 3.00 GHz (2 MB L2 cache) 3.20 GHz (2 MB L2 cache) 3.40 GHz (2 MB L2 cache) 3.60 GHz (2 MB L2 cache) 3.80 GHz (2 MB L2 cache)
	2nd 64-bit Intel Xeon Processor with 800 MHz Front Side Bus (optional – speed must match processor 1)
	2.80 GHz (2 MB L2 cache) 3.00 GHz (2 MB L2 cache) 3.20 GHz (2 MB L2 cache) 3.40 GHz (2 MB L2 cache) 3.60 GHz (2 MB L2 cache) 3.80 GHz (2 MB L2 cache)

Operating System – One of the following	Genuine Windows XP Professional
	Genuine Windows XP Professional x64 Edition (http://www.hp.com/workstations/pws/windowsxp64/)
	Red Hat Linux Workstation 4
	HP Installer Kit for Linux (includes drivers for both 32-bit & 64-bit OS versions)
	NOTE: Although HP Personal Workstations can be ordered with the HP Installer Kit for Linux and an IEEE 1394 card, HP cannot provide customer support for this configuration. Please refer to the Linux Hardware Support Matrix (http://www.hp.com/support/linux_hardware_matrix) for details, and to the Linux User Manual (http://www.hp.com/support/linux_user_manual) for tips on user-enablement of the IEEE 1394 Card.

1st Hard Disk Drive – One of the following		Windows XP	Red Hat Linux
Serial ATA 3.0-Gb/s Hard Drives (Currently supported only at 1.5-Gb/s. To get 3.0-Gb/s performance, a SATA 3.0-Gb/s controller must be added)			
80 GB 7200 rpm Serial ATA drive (8 MB cache)		32-Bit, 64-Bit	WS3, WS4
160 GB 7200 rpm Serial ATA NCQ drive (8 MB cache)		32-Bit, 64-Bit	WS3, WS4
250 GB 7200 rpm Serial ATA drive (8 MB cache)		32-Bit, 64-Bit	WS3, WS4
500 GB 7200 rpm Serial ATA NCQ drive (8 MB cache)		32-Bit, 64-Bit	WS3, WS4
Serial ATA 1.5-Gb/s Hard Drives			
74 GB 10K rpm Serial ATA drive (8 MB cache)		32-Bit, 64-Bit	WS3, WS4
Ultra320 SCSI Hard Drives (SCSI Controller required)			
73 GB 10K Ultra320 SCSI drive		32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
146 GB 10K Ultra320 SCSI drive		32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
300 GB 10K Ultra320 SCSI drive		32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
36 GB 15K Ultra320 SCSI drive		32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
73 GB 15K Ultra320 SCSI drive		32-Bit, 64-Bit	7.2, 7.3, WS3, WS4

Standard Features - Custom Components

2nd Hard Disk Drive – One of the following	Serial ATA 3.0-Gb/s Hard Drives **		
	2nd hard drive, 80 GB 7200 rpm Serial ATA drive (8 MB cache)	32-Bit, 64-Bit	WS3, WS4
	2nd hard drive, 160 GB 7200 rpm Serial ATA NCQ drive (8 MB cache)	32-Bit, 64-Bit	WS3, WS4
	2nd hard drive, 250 GB 7200 rpm Serial ATA drive (8 MB cache)	32-Bit, 64-Bit	WS3, WS4
	2nd hard drive, 500 GB 7200 rpm Serial ATA NCQ drive (8 MB cache)	32-Bit, 64-Bit	WS3, WS4
	Serial ATA 1.5-Gb/s Hard Drives **		
	2nd hard drive, 74 GB 10K rpm Serial ATA drive (8 MB cache)	32-Bit, 64-Bit	WS3, WS4
	Ultra320 SCSI Hard Drives ***		
	2nd hard drive, 73 GB 10K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	2nd hard drive, 146 GB 10K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	2nd hard drive, 300 GB 10K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	2nd hard drive, 36 GB 15K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	2nd hard drive, 73 GB 15K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4

NOTE:

**May mix hard drive types. First hard drive must be a Serial ATA drive.

*** May mix hard drive types. SCSI Controller required. Mixed drive types not supported with Linux.

3rd Hard Disk Drive – One of the following	Serial ATA 3.0-Gb/s Hard Drives **		
	3rd hard drive, 80 GB 7200 rpm Serial ATA drive (8 MB cache)	32-Bit, 64-Bit	WS3, WS4
	3rd hard drive, 160 GB 7200 rpm Serial ATA NCQ drive (8 MB cache)	32-Bit, 64-Bit	WS3, WS4
	3rd hard drive, 250 GB 7200 rpm Serial ATA drive (8 MB cache)	32-Bit, 64-Bit	WS3, WS4
	3rd hard drive, 500 GB 7200 rpm Serial ATA NCQ drive (8 MB cache)	32-Bit, 64-Bit	WS3, WS4
	Ultra320 SCSI Hard Drives ***		
	3rd hard drive, 73 GB 10K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	3rd hard drive, 146 GB 10K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	3rd hard drive, 300 GB 10K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	3rd hard drive, 36 GB 15K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	3rd hard drive, 73 GB 15K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4

NOTE:

**May mix hard drive types. First hard drive must be a Serial ATA drive.

*** May mix hard drive types. SCSI Controller required. Mixed drive types not supported with Linux.

Standard Features - Custom Components

Factory Integrated RAID*	RAID 0 Configuration – Striped Array	32-Bit	Not supported
	RAID 1 Configuration – Mirrored Array	32-Bit	Not supported
*NOTE: Requires 2 identical hard drives (speeds, capacity, interface). No Linux support. 64-Bit not supported with Serial ATA Drives.			

Drive controllers	Integrated serial ATA controller	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	Optional Ultra 320 SCSI controller (required if HDs are SCSI) - basic	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	Optional U320 SCSI Controller - LSI 20320AR RAID 0,1 (required with SCSI HDDs)and external connector	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
*NOTE: Can be sold and used with 1 or 2 SATA drives as a stand alone controller (no SCSI HDD).			

Memory -		Windows XP	Red Hat Linux
One of the following	256 MB DDR-2 PC2-3200 (400 MHz) ECC Registered (1 x 256 MB)	32-Bit, 64-Bit	7.2, 7.3
	512 MB DDR-2 PC2-3200 (400 MHz) ECC Registered (2 x 256 MB)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	1 GB DDR-2 PC2-3200 (400 MHz) ECC Registered (2 x 512 MB)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	2 GB DDR-2 PC2-3200 (400 MHz) ECC Registered (2 x 1 GB)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	2 GB DDR-2 PC2-3200 (400 MHz) ECC Registered (4 x 512 MB)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	3 GB DDR-2 PC2-3200 (400 MHz) ECC Registered (2 x 1 GB + 2 x 512 MB)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	4 GB DDR-2 PC2-3200 (400 MHz) ECC Registered (2 x 2 GB)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	4 GB DDR-2 PC2-3200 (400 MHz) ECC Registered (4 x 1 GB)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	6 GB DDR-2 PC2-3200 (400 MHz) ECC Registered (2 x 2 GB + 2 x 1 GB)	64-Bit	7.2, 7.3, WS3, WS4
	8 GB DDR-2 PC2-3200 (400 MHz) ECC Registered (4 x 2 GB)	64-Bit	7.2, 7.3, WS3, WS4

Standard Features - Custom Components

Removable Storage		Windows XP	Red Hat Linux
	1.44 MB Diskette Drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	48X CD-ROM Drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	48X CD-RW Drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	16X DVD-ROM Drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	48X Combo CD-RW/DVD-ROM Drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	16X DVD+/-RW, Dual-Layer LightScribe	32-Bit	
	HP No Optical Drive Option	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4

2nd Removable Storage*		Windows XP	Red Hat Linux
	48X CD-RW Drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	16X DVD-ROM Drive**	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	48X Combo CD-RW/DVD-ROM Drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	16X DVD+/-RW, Dual-Layer LightScribe***	32-Bit	WS3, WS4

NOTES: *Can not order with No Optical Option. **Can not have two of the same in one workstation.
*** LightScribe software works with Windows only.

Keyboard*** -		Windows XP	Red Hat Linux
One of the following	PS/2 Standard Keyboard	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	USB Standard Keyboard	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4

*****NOTE:** Not supported in configurations which include both USB mouse and Linux nor PS/2 mouse and Linux.

Mouse -		Windows XP	Red Hat Linux
One of the following	PS/2 2-Button Scroll Mouse	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	USB 2-Button Optical Scroll Mouse	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	USB 3-Button Optical Mouse	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4

Standard Features - Custom Components

Audio	Integrated Digital AC97 audio with internal speaker		WS3 & WS4
	Sound Blaster® X-Fi™ XtremeMusic PCI	32-Bit, 64-Bit	Not supported
	HP Optical Drive Internal Audio Cable*	32-Bit, 64-Bit	WS3 & WS4
	*NOTE: Not available with No Optical Option nor with the Sound Blaster X-Fi card.		
NIC	Broadcom 5751 Netxtreme™ Gigabit PCIe NIC	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
Graphics	NVIDIA Quadro NVS 285 with TurboCache Technology PCI Express (128 MB, VGA & DVI) (Two of these graphics cards can be integrated in the factory or in addition to an NVIDIA Quadro NVS 440).	32-Bit, 64-Bit	Windows XP Red Hat Linux WS3, WS4
	ATI FireGL V3100 PCI Express (128 MB)	32-Bit, 64-Bit	
	NVIDIA Quadro FX 540 PCI Express (128 MB)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	NVIDIA Quadro FX 1400 PCI Express (128 MB)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	ATI FireGL V5100 PCI Express (128 MB)	32-Bit, 64-Bit	
	NVIDIA Quadro NVS 440 PCI Express (256 MB) (Two of these graphics cards can be integrated in the factory or in addition to an NVIDIA Quadro NVS 285).	32-Bit, 64-Bit	
	NVIDIA Quadro FX 3450 PCI Express (256 MB)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	Miscellaneous	Solenoid lock and hood sensor	32-Bit, 64-Bit
	HP FireWire IEEE 1394a 3-Port PCI Card	32-Bit, 64-Bit	Not Supported
	Trusted Platform Module	32-Bit	
	HP 64-bit Transition Tool Kit	32-Bit, 64-Bit	
	HP Workstations Mouse Pad	N/A	N/A
Software	Symantec Norton AntiVirus (optional)*	32-Bit	
	CA eTrust 64-bit Anti-Virus Software	64-Bit	
	HP Performance Tuning Framework*	32-Bit, 64-Bit	
	Altiris Recovery*	32-Bit	
	HP Client Manager Software v6.0*	32-Bit	
* Not available with Linux Operating System			

Standard Features - Specs

Operating System (choice)	Microsoft Windows XP Professional	
	Windows XP Professional x64 Edition (http://www.hp.com/workstations/pws/windowsxp64/)	
	OR Red Hat Enterprise Linux Workstation 4	
	OR HP Installer Kit for Linux (includes drivers for both 32-bit & 64-bit OS versions on HP xw8200, xw6200 and xw4200)	
Form factor	Minitower	
Color	Carbonite/Alloy metallic	
System Board Form Factor	Non-standard ATX	
Processor	Single or dual 64-bit Intel Xeon processors (Nocona) with Hyper-Threading Technology	
CPU Bus Speed Supported	800 MHz FSB	
Standard L2 Cache	2 MB L2 cache	
Chipset	Intel E7525	
Memory Expansion Slots	4 DIMM's	
Memory Type Supported	DDR-2 (ECC registered)	
Memory Speed Supported	DDR-2 Synch DRAM PC2-3200 (400 MHz) Registered ECC	
Maximum Memory	8 GB (4 DIMMs slots, 2 GB DIMMs required to meet maximum configurations)	
Network controller	Integrated Broadcom 5751 10/100/1000 for HP	
Audio	Integrated AC'97 digital audio with S/PDif 6-channel pass-through, stereo microphone, and Yamaha XG Lite Softsynth support	
PCI slots	4 PCI slots (full-height) 1 PCI Express (x8 mechanically, x4 electrically) 1 PCI Express x16 graphics	
AGP slot	none	
Bays	Total Bays = 5	
Internal Bays	<ul style="list-style-type: none"> Two 3.5 inch bays with acoustic dampening rail assemblies 	
External Bays	<ul style="list-style-type: none"> Two 5.25 inch full length 2003 mm maximum device depth (top bay is limited to 198 mm depth when optional smart cover solenoid lock is installed). Bottom bay can be converted to an internal 3.5 inch 3rd Hard Drive bay using optional bracket One 3.5 inch bay for optional floppy drive 	
Parallel Port	1	
Serial Port	1	
Front I/O	2 USB 2.0, Headphone, Microphone, optional IEEE 1394 NOTE: Although HP Personal Workstations can be ordered with the HP Installer Kit for Linux and an IEEE 1394 card, HP cannot provide customer support for this configuration. Please refer to the Linux Hardware Support Matrix (http://www.hp.com/support/linux_hardware_matrix) for details, and to the Linux User Manual (http://www.hp.com/support/linux_user_manual) for tips on user-enablement of the IEEE 1394 Card.	
Rear I/O	6 USB 2.0, 1 standard serial port, 1 parallel port, PS/2 keyboard and mouse, 1 RJ-45 to integrated Gigabit LAN, Audio In, Audio Out, Mic In	
USB Keyboard	Optional	
USB Mouse	Optional	
PS/2 Keyboard	1	
PS/2 Mouse	1	
Chassis Dimensions (H x W x D)	17.3 x 6.5 X 17.3 in (44.1 x 16.5 x 44.0 cm)	
System weight	Standard config – 35 lb	
Shipping weight	Varies by region	
Temperature	Operating	40° to 95° F (5° to 35° C)
	Non-operating	-40° to 140° F (-40° to 60° C)

Standard Features - Specs

Humidity	Operating	8% to 85%
	Non-operating	8% to 90%
Maximum Altitude (nonpressurized)	Operating	10,000 ft (3,000 m)
	Non-operating	30,000 ft (9,100 m)
Power Supply	500W wide-ranging, active Power Factor Correction	
Interfaces Supported	1 SATA interface (2 serial-ATA connectors), 1 EIDE interface (2 EIDE connectors) for optical drives, optional multi-bay interface	
Hard Drive Controller (PCI) Supported	Ultra160 or Ultra320, or SATA RAID, or Ultra320 RAID	
Preinstalled Software		
HP Client Manager Software v6.0*		
Altiris Local Recovery*		
Alert Standard Format specification*		
Norton AntiVirus 2004 (optional preinstall)*		
CD/DVD software dependent on optical drive choices		
* Not available on Linux		

Standard Features - Preconfigured Global Models

xw6200X/XE2.8/B80/ H1.0/285/dF/s EN557AW#XXX (See Country Code Key at end of section.)	Processor	64-bit Intel Xeon processor 2.80 GHz 2 MB/800
	OS	Genuine Windows XP Professional
	Cache Memory	2 MB L2
	Memory	1 GB (2x512MB) DDR2-400 ECC Registered
	Optical Drive	16X DVD-ROM
	Hard Drive	80 GB SATA 3.0-Gb/s 7200 rpm (1st)
	HDD Controller	Serial ATA controller
	Floppy Drive	1.44 MB 3.5" Floppy Drive
	Graphics	NVIDIA Quadro NVS 285 with TurboCache Technology PCI Express included in base configuration.
	Mouse	HP scroll mouse (PS/2)
	Keyboard	Standard PS/2 Keyboard
	Other Integrated	Broadcom 10/100/1000 GBIT LOM, and AC97 audio

xw6200X/XE3.2+/B80/ H1.0/285/dF/s EN558AW#XXX (See Country Code Key at end of section.)	Processor	64-bit Intel Xeon processor 3.20 GHz 2 MB/800
	2nd Processor	64-bit Intel Xeon processor 3.20 GHz 2 MB/800
	OS	Genuine Windows XP Professional
	Cache Memory	2 MB L2
	Memory	1 GB (2x512MB) DDR2-400 ECC Registered
	Optical Drive	16X DVD-ROM
	Hard Drive	80 GB SATA 3.0-Gb/s 7200 rpm (1st)
	HDD Controller	Serial ATA controller
	Floppy Drive	1.44 MB 3.5" Floppy Drive
	Graphics	NVIDIA Quadro NVS 285 with TurboCache Technology PCI Express included in base configuration.
	Mouse	HP scroll mouse (PS/2)
	Keyboard	Standard PS/2 Keyboard
	Other Integrated	Broadcom 10/100/1000 GBIT LOM, and AC97 audio

Standard Features - Preconfigured Global Models

xw6200X/XE3.2+/S73b/ H1.0/285/dF/p EN559AW#XXX (See Country Code Key at end of section.)	Processor	64-bit Intel Xeon processor 3.20 GHz 2 MB/800
	2nd Processor	64-bit Intel Xeon processor 3.20 GHz 2 MB/800
	OS	Genuine Windows XP Professional
	Cache Memory	2 MB L2
	Memory	1 GB (2x512MB) DDR2-400 ECC Registered
	Optical Drive	16X DVD-ROM
	Hard Drive	73 GB SCSI 10k rpm (1st)
	HDD Controller	U320 SCSI Controller (No RAID)
	Floppy Drive	1.44 MB 3.5" Floppy Drive
	Graphics	NVIDIA Quadro NVS 285 with TurboCache Technology PCI Express included in base configuration.
	Mouse	HP optical scroll mouse (USB)
	Keyboard	Standard USB Keyboard
	Other Integrated	Broadcom 10/100/1000 GBIT LOM, and AC97 audio

xw6200X/XE3.2+/D80/ H2.0/285/d/s EQ644AW#XXX (See Country Code Key at end of section.)	Processor	64-bit Intel Xeon processor 3.20 GHz 2 MB/800
	2nd Processor	64-bit Intel Xeon processor 3.20 GHz 2 MB/800
	OS	Genuine Windows XP Professional
	Cache Memory	2 MB L2
	Memory	2 GB (2x1 GB) DDR2-400 ECC Registered
	Optical Drive	16X DVD-ROM
	Hard Drive	80 GB SATA 3.0-Gb/s 7200 rpm (1st)
	HDD Controller	Serial ATA controller
	Floppy Drive	None
	Graphics	NVIDIA Quadro NVS 285 with TurboCache Technology PCI Express included in base configuration.
	Mouse	HP scroll mouse (PS/2)
	Keyboard	Standard PS/2 Keyboard
	Other Integrated	Broadcom 10/100/1000 GBIT LOM, and AC97 audio

Standard Features - Preconfigured Global Models

xw6200X/XE3.2+/D80/ H2.0/285+/d/p EQ646AW#XXX (See Country Code Key at end of section.)	Processor	64-bit Intel Xeon processor 3.20 GHz 2 MB/800
	2nd Processor	64-bit Intel Xeon processor 3.20 GHz 2 MB/800
	OS	Genuine Windows XP Professional
	Cache Memory	2 MB L2
	Memory	2 GB (2x1 GB) DDR2-400 ECC Registered
	Optical Drive	16X DVD-ROM
	Hard Drive	80 GB SATA 3.0-Gb/s 7200 rpm (1st)
	HDD Controller	Serial ATA controller
	Floppy Drive	None
	Graphics	Dual NVIDIA Quadro NVS 285 with TurboCache Technology PCI Express Graphics cards included.
	Mouse	HP optical scroll mouse (USB)
	Keyboard	Standard USB Keyboard
	Other Integrated	Broadcom 10/100/1000 GBIT LOM, and AC97 audio
	<hr/>	
xw6200X/XE3.4+/C74/ H2.0/285/dF/s EN560AW#XXX (See Country Code Key at end of section.)	Processor	64-bit Intel Xeon processor 3.40 GHz 2 MB/800
	2nd Processor	64-bit Intel Xeon processor 3.40 GHz 2 MB/800
	OS	Genuine Windows XP Professional
	Cache Memory	2 MB L2
	Memory	2 GB (2x1 GB) DDR2-400 ECC Registered
	Optical Drive	16X DVD-ROM
	Hard Drive	74 GB SATA 1.5-GB/S 10k rpm (1st)
	HDD Controller	Serial ATA controller
	Floppy Drive	1.44 MB 3.5" Floppy Drive
	Graphics	NVIDIA Quadro NVS 285 with TurboCache Technology PCI Express included in base configuration.
	Mouse	HP scroll mouse (PS/2)
	Keyboard	Standard PS/2 Keyboard
	Other Integrated	Broadcom 10/100/1000 GBIT LOM, and AC97 audio

Standard Features - Preconfigured Global Models

xw6200X/XE3.2+/D80/ H2.0/285+/d/p EQ647AW#XXX (See Country Code Key at end of section.)	Processor	64-bit Intel Xeon processor 3.40 GHz 2 MB/800
	2nd Processor	64-bit Intel Xeon processor 3.40 GHz 2 MB/800
	OS	Genuine Windows XP Professional
	Cache Memory	2 MB L2
	Memory	2 GB (2x1 GB) DDR2-400 ECC Registered
	Optical Drive	16X DVD-ROM
	Hard Drive	160 GB SATA 3.0-Gb/s 7200 rpm NCQ (1st)
	HDD Controller	Serial ATA controller
	Floppy Drive	1.44 MB 3.5" Floppy Drive
	Graphics	Dual NVIDIA Quadro NVS 285 with TurboCache Technology PCI Express Graphics cards included.
	Mouse	HP scroll mouse (PS/2)
	Keyboard	Standard PS/2 Keyboard
	Other Integrated	Broadcom 10/100/1000 GBIT LOM, and AC97 audio
<hr/>		
xw6200X/XE3.6+/C74/ H2.0/285/d/p EQ648AW#XXX (See Country Code Key at end of section.)	Processor	64-bit Intel Xeon processor 3.60 GHz 2 MB/800
	2nd Processor	64-bit Intel Xeon processor 3.60 GHz 2 MB/800
	OS	Genuine Windows XP Professional
	Cache Memory	2 MB L2
	Memory	2 GB (2x1 GB) DDR2-400 ECC Registered
	Optical Drive	16X DVD-ROM
	Hard Drive	74 GB SATA 1.5-GB/S 10k rpm (1st)
	HDD Controller	Serial ATA controller
	Floppy Drive	None
	Graphics	NVIDIA Quadro NVS 285 with TurboCache Technology PCI Express included in base configuration.
	Mouse	HP optical scroll mouse (USB)
	Keyboard	Standard USB Keyboard
	Other Integrated	Broadcom 10/100/1000 GBIT LOM, AC97 audio, and Serial ATA controller

Standard Features - Preconfigured Global Models

xw6200X/XE3.8+/C74/ H2.0/285+/dF/s EQ649AW#XXX (See Country Code Key at end of section.)	Processor	64-bit Intel Xeon processor 3.80 GHz 2 MB/800
	2nd Processor	64-bit Intel Xeon processor 3.80 GHz 2 MB/800
	OS	Genuine Windows XP Professional
	Cache Memory	2 MB L2
	Memory	2 GB (2x1 GB) DDR2-400 ECC Registered
	Optical Drive	16X DVD-ROM
	Hard Drive	74 GB SATA 1.5-GB/S 10k rpm (1st)
	HDD Controller	Serial ATA controller
	Floppy Drive	1.44 MB 3.5" Floppy Drive
	Graphics	Dual NVIDIA Quadro NVS 285 with TurboCache Technology PCI Express Graphics cards included.
	Mouse	HP scroll mouse (PS/2)
	Keyboard	Standard PS/2 Keyboard
	Other Integrated	Broadcom 10/100/1000 GBIT LOM, AC97 audio, and Serial ATA controller

Country Code Key

N. America	#ABA	Switzerland (German/French)	#AR8
Fr. Canadian	#ABC	Switzerland (Italian/English)	#ACN
L. America	#ABM	Dutch	#ABH
Japan (English)	#ACF	Denmark	#ACE
Japan (Japanese)	#ABJ	Asia/Pacific (English)	#AB4
UK	#ABU	Korea	#AB1
Germany	#ABD	China	#AB2
France	#ABF	Taiwan	#ABO
Italy	#ABZ	India	#ACJ
Spain	#ABE	Australia	#ABG
Europe	#AK6	Thailand	#AKL

After-Market Options

Processors	2nd 64-bit Intel Xeon® processor with Hyper-Threading	Part Number
	64-bit Intel Xeon processor at 2.80 GHz with 800 MHz FSB & 1 MB of L2 cache	DY665A
	64-bit Intel Xeon processor at 2.80 GHz with 800 MHz FSB & 2 MB of L2 cache	EC421AA
	64-bit Intel Xeon processor at 3.00 GHz with 800 MHz FSB & 1 MB of L2 cache	DY666A
	64-bit Intel Xeon processor at 3.00 GHz with 800 MHz FSB & 2 MB of L2 cache	PQ903A
	64-bit Intel Xeon processor at 3.20 GHz with 800 MHz FSB & 1 MB of L2 cache	DY667A
	64-bit Intel Xeon processor at 3.20 GHz with 800 MHz FSB & 2 MB of L2 cache	PQ904A
	64-bit Intel Xeon processor at 3.40 GHz with 800 MHz FSB & 1 MB of L2 cache	DY668A
	64-bit Intel Xeon processor at 3.40 GHz with 800 MHz FSB & 2 MB of L2 cache	PQ905A
	64-bit Intel Xeon processor at 3.60 GHz with 800 MHz FSB & 1 MB of L2 cache	DY669A
	64-bit Intel Xeon processor at 3.60 GHz with 800 MHz FSB & 2 MB of L2 cache	PQ906A
	64-bit Intel Xeon processor at 3.80 GHz with 800 MHz FSB & 2 MB of L2 cache	PH202A

Graphics	Multi display solutions	PCI	PCI-Express	Windows XP	Red Hat Linux	Part Number
	NVIDIA Quadro NVS 280 (64 MB, VGA & DVI)	X		32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	AA932A
	NVIDIA Quadro NVS 400 (64 MB, quad head, VGA & DVI)	X		32-Bit, 64-Bit		AA605A
	NVIDIA Quadro NVS 285 with TurboCache Technology PCI Express (128 MB)		X	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	EE061AA
	NVIDIA DVI Dual-head Connector Cablefor NVS cards	X	X	32-Bit, 64-Bit		DL139A
	NVIDIA Quadro FX 330 (64 MB)		X	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	PB332A
	ATI FireGL V3100 (128 MB)		X	32-Bit, 64-Bit		PE949A
	NVIDIA Quadro FX 540 (128 MB)		X	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	PH791A
	NVIDIA Quadro FX 1400 (128 MB)		X	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	PM979A
	ATI FireGL V5100 (128 MB)		X	32-Bit, 64-Bit		PB330A
	NVIDIA Quadro NVS 440 PCI Express (256 MB)		X	32-Bit, 64-Bit		PT453A
	NVIDIA Quadro FX 3450 PCI Express (256 MB)		X	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	PY640AA

After-Market Options

Hard Drives	Serial ATA Hard Drives	Windows XP	Red Hat Linux	Part Number
	(Currently supported only at 1.5Gb/s. To get 3Gb/s performance, a SATA 3.0Gb/s controller must be added)			
	74 GB SATA 1.5GB/S Hard Drive (10,000 rpm)	32-Bit, 64-Bit	WS3, WS4	DX760A
	80 GB SATA 3.0Gb/s Hard Drive (7200 rpm)	32-Bit, 64-Bit	WS3, WS4	PY276AA
	160 GB SATA 3.0Gb/s NCQ Hard Drive (7200 rpm)	32-Bit, 64-Bit	WS3, WS4	PV944A
	250 GB SATA 1.5Gb/s NCQ Hard Drive (7200 rpm)	32-Bit, 64-Bit	WS3, WS4	EA788AA
	500 GB SATA 3.0Gb/s NCQ Hard Drive (7200 rpm)	32-Bit, 64-Bit	WS3, WS4	PV943A
	SCSI Hard Drives			
	73 GB Ultra320 SCSI Hard Drive (10,000 rpm)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	AA613A
	146 GB Ultra320 SCSI Hard Drive (10,000 rpm)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	AA614A
	300 GB Ultra320 SCSI Hard Drive (10,000 rpm)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DY672A
	36 GB Ultra320 SCSI Hard Drive (15,000 rpm)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	AA616A
	73 GB Ultra320 SCSI Hard Drive (15,000 rpm)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	AA617A
	146 GB Ultra320 SCSI Hard Drive (15,000 rpm)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DY671A
	Hard Drive Accessories			
	Bracket HDD 3.5to5.25 xw6200	N/A	N/A	DY659A
	Cable, 3 port SCSI xw4200/6200	N/A	N/A	DY661A
	Removable Drive Enclosures			
	StorCase DX115 SATA Removable Enclosure	All	All	EA332AA
	StorCase DX115 SATA/SAS Carrier Tray	All	All	RA697AA

Controllers	SCSI Controllers	PCI	PCI-X	Windows XP	Red Hat Linux	Part Number
	Adaptec Serial ATA 3Gb/s RAID 1420SA card		X	32-Bit, 64-Bit	WS3	ED090AA
	U320 SCSI Controller - LSI 20320AR RAID 0,1& external connector	X		32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DZ554A
	Ultra320 SCSI RAID Adaptec 2120S (Windows only, includes external connector)	X		32-Bit, 64-Bit		AA850A

After-Market Options

Input Devices		Windows XP	Red Hat Linux	Part Number
Keyboards				
HP PS/2 Standard Keyboard (Carbonite/Silver)		32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DT527A
HP USB Standard Keyboard (Carbonite/Silver)		32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DT528A
HP USB Smart Card Keyboard		32-Bit, 64-Bit	Not Supported	ED707AA
Smartcard Adapter for Modular Keyboard		32-Bit, 64-Bit		DT531A
Pointing Devices				
HP PS/2 2-Button Scroll Mouse (Carbonite)		32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DD440B
HP USB 2-Button Optical Scroll Mouse (Carbonite/Silver)		32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DC172B
HP USB Optical 3-Button Mouse		32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DY651A
HP USB Optical 3-button 2.9M OEM Mouse			7.2, 7.3, WS3, WS4	ET424AA
USB Spaceball 5000		32-Bit, 64-Bit	Not Supported	DV675A
USB SpaceMouse		32-Bit, 64-Bit	Not Supported	DZ203A
HP SpacePilot 3D USB Intelligent Controller		32-Bit, 64-Bit	Not Supported	EF390AA

Networking	NICs	PCI	PCI-Express	Windows XP	Red Hat Linux	Part Number
	Intel Pro/1000 PT Gigabit PCIe NIC		X	32-Bit	WS3	EH352AA
	Intel Pro/1000 GT Gigabit PCI NIC		X	32-Bit	WS3, WS4	AG393AA
	Broadcom 5782 Netxtreme Gigabit PCI NIC	X		32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DC194A
	Broadcom 5751 Netxtreme Gigabit PCIe NIC		X	32-Bit, 64-Bit	WS3, WS4	EA833AA

Memory (DIMMs)	400 MHz DDR-2 PC2-3200 ECC Registered DIMMs	Windows XP	Red Hat Linux	Part Number
	256 MB DDR-2 PC2-3200 (400 MHz) ECC Registered	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DY656A
	512 MB DDR-2 PC2-3200 (400 MHz) ECC Registered	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DY658A
	1 GB DDR-2 PC2-3200 (400 MHz) ECC Registered	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DY655A
	2 GB DDR-2 PC2-3200 (400 MHz) ECC Registered	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DY657A

After-Market Options

Monitors (Supported by all TFTs

Operating Systems offered by HP)	HP TFT LP2465 (24-inch)	EF224A5#
	HP TFT L2335 (23-inch)	P9615W#
	HP TFT LP2065 (20.1-inch) TCO03 Two Tone (Carbonate/Silver)	EF227A5#
	HP TFT L2035 (20.1-inch)	P9614W#
	HP TFT L1955 2T Top (19.1-inch)	PH466AT#
	HP TFT L1755 (17-inch)	PL777AA#

Multimedia

		PCI	PCI-Express	
	Adaptec Fireconnect 2100 Firewire 400 (1394a) PCI Card (Windows only)	X		PA997A

NOTE: Although HP Personal Workstations can be ordered with the HP Installer Kit for Linux and an IEEE 1394 card, HP cannot provide customer support for this configuration. Please refer to the Linux Hardware Support Matrix (http://www.hp.com/support/linux_hardware_matrix) for details, and to the Linux User Manual (http://www.hp.com/support/linux_user_manual) for tips on user-enablement of the IEEE 1394 Card.

Multimedia

		Windows XP	Red Hat Linux	Part Number
	SoundBlaster X-Fi XtremeMusic Audio Card	32-Bit	Not Supported EA326AA	EA326AA
	HP Satellite Speakers			ZD929AA

Optical Drives

		Windows XP	Red Hat Linux	Part Number
	DVD-ROM Drive 16X DVD-ROM w/ +R read	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	AA620B
	CD-ROM Drive 48X Max CD-ROM Drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DC143B
	CD-RW Drive 48X CD-RW Drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DE205B
	Combo Drive 48X Combo DVD-ROM/CD-RW Drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DE206B
	DVD+/-RW Drive 16X DVD+/-RW, Dual-Layer LightScribe (LightScribe labeling functionality not supported on Linux)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DZ555B

After-Market Options

Removable Storage	Windows XP	Red Hat Linux	Part Number
HP 256-MB Drive Key II Flash Drive	32-Bit, 64-Bit	WS3, WS4	PH657A
HP 1-GB Drive Key II Flash Drive	32-Bit, 64-Bit	WS3, WS4	AG382AA
512 MB USB 2.0 Drive Key II	32-Bit, 64-Bit	WS3, WS4	ED516AA
1.44 MB Internal Floppy Drive	32-Bit, 64-Bit	WS3	DY670A
HP StorageWorks DAT 24 USB external tape drive	32-Bit, 64-Bit	WS3, WS4	DW070A
HP StorageWorks DAT 24 USB internal tape drive	32-Bit, 64-Bit	WS3, WS4	DW069A
HP StorageWorks DAT 40 USB external tape drive	32-Bit, 64-Bit	WS3, WS4	DW023A
HP StorageWorks DAT 40 USB internal tape drive	32-Bit, 64-Bit	WS3, WS4	DW022A
HP StorageWorks DAT 72 USB external tape drive	32-Bit, 64-Bit	WS3, WS4	DW027A
HP StorageWorks DAT 72 USB internal tape drive	32-Bit, 64-Bit	WS3, WS4	DW026A
HP StorageWorks DAT 72 SCSI external tape drive	32-Bit, 64-Bit	WS3, WS4, 7.2, 7.3	Q1523B
HP StorageWorks DAT 72 SCSI internal tape drive	32-Bit, 64-Bit	WS3, WS4, 7.2, 7.3	Q1522B

The following Removable Drive Enclosure products are available from and supported by 3rd party:
[StorCase Rhino Jr. SATA 1.5Gb/s Removable Disk Enclosure](#)
 (For NA, use: HP P/N A466720, for WW, use: vendor P/N S21J111)

Security	Part Number
Chassis clamp lock, universal, no cable	DE817A
Chassis clamp lock, universal, with cable	DE818A

Brackets/Stand	Part Number
HP xw6200 sliding rack kit	DY663A
<ul style="list-style-type: none"> Exclusively designed for the xw6200 Standard-width, ball bearing sliding rails Includes hardware to work with IT racks only (not broadcast) 	

Other Devices	Part Number
Front Card Guide and Fan Kit	DY648A

Operating Systems	Part Number
Red Hat Enterprise Linux Workstation 3 Update 7 (32-bit version)	RA354AA
Red Hat Enterprise Linux Workstation 4 Update 1 (32/64-bit version)	EA700AA
Red Hat Enterprise Linux Workstation 4 Update 3 (32/64-bit version)	RA356AA

After-Market Options

Software	Windows XP	Red Hat Linux	Part Number
HP Remote Graphics V3LTU for HP WS	32-Bit	7.2, 7.3, WS3, WS4	PY682AA
HP Remote Graphics V4 LTU for HP WS	32-Bit, 64-Bit	WS3, WS4	RG088AA
HP Remote Graphics V3 Receiver LTU	32-Bit	7.2, 7.3, WS3, WS4	PY684AA
HP Remote Graphics V4 Receiver LTU	32-Bit, 64-Bit	WS3, WS4	RG090AA
HP Remote Graphics V3 software media	32-Bit	7.2, 7.3, WS3, WS4	PY685AA
HP Remote Graphics V4 software media (available 8/1/06)	32-Bit, 64-Bit	WS3, WS4	RG091AA
HP Remote SW for HP 1 year Update Subscription	32-Bit	7.2, 7.3, WS3, WS4	PN681A
HP Remote SW Receiver 1 year Update Subscription	32-Bit	7.2, 7.3, WS3, WS4	PN680A

Memory

E7525 chipset

DDR-2 SDRAM ECC REGISTERED MEMORY

If only using one DIMM, install it in socket 1. For more than one DIMM, install memory in pairs (a pair would be considered to be the DIMMs in sockets 1 & 2, 3 & 4) and do not mix speeds. It is always best to load the memory in pairs rather than a single DIMM (two 512 MB DIMMs will have better performance than a single 1 GB DIMM). Each pair of DIMMs must be the same size and same DRAM technology. The Intel E7525 chipset supports ECC Registered 400 MHz (PC2-3200) DDR-2 memory only.

MAXIMUM MEMORY


Supports up to 8 GB of DDR SDRAM

POSSIBLE MEMORY CONFIGURATIONS

Not all memory configurations possible are represented below.

DIMM Size	Slot			
	1	2	3	4
256 MB	256 MB			
512 MB	512 MB			
512 MB	256 MB	256 MB		
1 GB	1 GB			
1 GB	256 MB	256 MB	256 MB	256 MB
2 GB	1 GB	1 GB		
2 GB	512 MB	512 MB	512 MB	512 MB
4 GB	1 GB	1 GB	1 GB	1 GB
8 GB	2 GB	2 GB	2 GB	2 GB

Storage

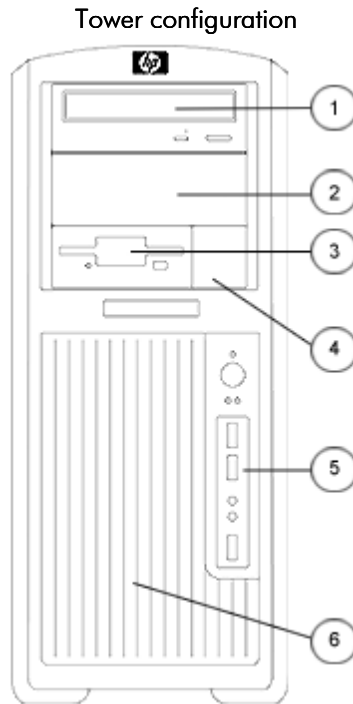

Convertible Minitower

Optional Diskette Drive
 5.25" Storage Drive Bays
 (position 1 drive bay is limited to 198 mm depth when optional smart cover solenoid lock is installed; position 2 drive bay can be converted to an internal 3.5" 3rd hard drive bay with optional bracket)
 3.5" Storage Drive Bays with acoustic dampening rail assemblies

	Quantity Supported	Position Supported	Controller
Optional Diskette Drive	1	3	Diskette
5.25" Storage Drive Bays (position 1 drive bay is limited to 198 mm depth when optional smart cover solenoid lock is installed; position 2 drive bay can be converted to an internal 3.5" 3rd hard drive bay with optional bracket)	2	1, 2	IDE
3.5" Storage Drive Bays with acoustic dampening rail assemblies	2 (3)	4, 5 (and 2, for 3rd drive using optical bay)	SATA or optional SCSI Factory Integrated RAID*

* **NOTE:** Factory Integrated RAID 0 Configuration (Striped Array) and RAID 1 Configuration (Mirrored Array) requires 2 hard drives with identical speeds, capacity and interface.

Additional Technical Specifications

System Board	
Architecture	Xeon 64-bit/PCI-E
Chipset	Intel E7525/ICH5R Chipset
Super I/O Controller	SMSC LPC47B397
System Board Form Factor	ATX (slightly larger than standard ATX)
Processor Socket	Dual 604 Pin ZIF
DIMM Connectors (DDR2, 1.8V)	4
AGP Connector (1.5V)	None
Integrated Graphics	None
PCI Connectors (5.0V)	4 full length 33 MHz 32-bit
PCI Express Connectors	1 x16 1 x8 (with x4 electricals)
PCI card guide	Optional, tool-free support for all full-length cards with PCI extender
Flash ROM	Yes
AC97 integrated audio	Yes
CD ROM IN (Audio)	Yes
AUX IN (Audio)	Yes
Clear CMOS Button	Yes
CPU Fan Header	Yes
Chassis Fan Header	Yes
Chassis Speaker Header	Yes
CMOS Battery Holder – Lithium	Yes
Hood Lock Header	Yes
Hood Sensor Header	Yes
Multibay Header	Yes
Hard drive acoustic dampening rails	Standard in 2 internal 3.5" bays, tool-free
Integrated SATA RAID	<ul style="list-style-type: none"> • RAID 0 and RAID 1 • Supports one RAID array on 2 ports • Creation of 2 drive HDD array • RAID 0 Configuration - Striped Array • RAID 1 Configuration - Mirrored Array
Integrated Broadcom	Yes
NetXtreme Gigabit Ethernet for HP	Yes
Wake-On-Lan®	Yes
ASF 1.0 (Alert Standard Format)	Yes
Power Supply Header	Yes
Power Switch, Power LED & Hard Drive LED Header	Yes
Password Clear Header	Yes
Riser Connector	None

Additional Technical Specifications

HDD activity LED Header	Yes, 2 & 4 pin
PCI extender that connects to System Board	None

Technical Specifications

Cooling	
Cooling Solutions Supported	Yes
Power Supply Fan (Variable Speed)	92 x 25 mm
Processor Fan-Heatsink (Variable Speed)	70 x 15 mm
Chassis Fan (front)	One 92 x 25 mm (optional)
Chassis Fan (rear)	Two 92 x 25 mm (standard)
Internal Speaker	Standard

Power Supply	
Full Ranging Input	Yes
Active Power Factor Correction (APFC) (Input Current is nearly 1/2 a non-APFC PS)	Yes
Passive Power Factor Correction (PFC)	No
Operating Voltage Range	90 - 264 VAC/118 VAC
Rated Voltage Range	100 - 240 VAC
Rated Line Frequency	50-60 Hz/400Hz
Operating Line Frequency Range	47 - 66 Hz/393 - 407Hz
Rated Input Current	9A/9A
Maximum Rated Power	500 W
Heat Dissipation	Typical 1228.9 btu/hr Maximum 1706 btu/hr
PS Size (wide x high x deep)	150 mm x 98 mm x 168 mm
Energy Star Compliant	Yes
FEMP Standby Power Compliant (<2W in S5 - Power Off)	No
Surge Tolerant Full Ranging Power Supply	Withstands power surges up to 2000V
Typical configuration power consumption	2 processors (2x3.6GHz Xeon), 1 GB memory (2x 512 MB) Two hard drives (2xSATA 40 GB), DVD-ROM drive PCI-Express Graphics Card (FX 1300) Floppy, Monitor
	Input Power consumption @ 120Vac/60Hz
Typical operating mode (system busy)	360 W = 1228.9 btu/hr
Windows XP Idle	201 W = 685.9 btu/hr
Hibernate mode (S4)	6.4 W = 21.84 btu/hr
Power Off (S5)	6.4 W = 21.84 btu/hr

ROM Features	Description
Instantly Available PC	Allows for very low power consumption with quick resume time

Technical Specifications

ROM Based F10 Setup and diagnostics	Review and customize BIOS settings
Remote System Installation via F12 (PXE) (Remote Boot from Server)	Allows a new or existing system to boot over the network and download software, including the operating system
System/Emergency ROM Flash Recovery with Video	Recovers corrupted system BIOS
ROM revision levels	<ul style="list-style-type: none"> Identifies system ROM revision levels and reports in ROM-based F10 setup. Version is stored in an industry standard memory location (SMBIOS) so that management SW applications can use and report this information
System board revision level	<ul style="list-style-type: none"> Allows management SW to read the revision level of the system board. Revision level is digitally encoded into the hardware and cannot be modified
Auto Setup when New Hardware Installed	System automatically detects addition of new hardware
Serial, Parallel, USB, Audio, Network, Enable/Disable Port Control	Enable or disables serial, parallel, USB, audio, and network ports
Removable Media Write/Boot Control	Prevents ability to boot from removable media on supported devices (and can disable writes to media)
Power-On Password	Prevents an unauthorized person from booting up the computer
Setup Password	Prevents an unauthorized person from changing the system configuration
Replicated Setup	Saves BIOS settings to diskette or USB disk-on-key in human readable file. Repset.exe utility can then replicate these settings on machines being deployed without entering ROM-based F10 setup
Memory Change Alert (Requires HP Client Manager Software)	Alerts management console if memory is removed or changed
Thermal Alert (Requires HP Client Manager Software)	Monitors the temperature state within the chassis. Three modes: <ul style="list-style-type: none"> NORMAL – normal temperature ranges ALERTED – excessive temperatures are detected. Raises a flag so action can be taken to avoid shutdown or provide for a smoother system shutdown SHUTDOWN – excessive temperatures are encountered. Automatically shuts down the computer without warning before hardware component damage occurs
Master Boot Record Security	Detects changes to MBR and optional restoration, useful in protecting from viruses
Remote ROM Flash	Provides secure, fail-safe ROM image management from a central network console
Remote Wakeup/shutdown	<ul style="list-style-type: none"> System administrators can power on, restart, and power off a client computer from a remote location. Enables cost-effective power consumption when the administrator needs to distribute software, perform security management, or update the ROM
ACPI (Advanced Configuration and Power Management Interface)	<ul style="list-style-type: none"> Allows the system to wake from a low power mode Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system. Supports ACPI 2.0 for full compatibility with 64-bit operating systems
Keyboard-less Operation	The system can be operated without a keyboard
SMBIOS	System Management BIOS 2.3.5, previously known as DMI BIOS, for system management information
Localized ROM Setup	Common BIOS image supports configuration (Setup) in 11 languages, with local keyboard mappings
Asset tag	Allows user or MIS to set unique tag string in ROM
Ownership tag	Allows user or MIS to set unique tag string in ROM
Memory Scrubbing	Allows memory controller to transparently correct transient ECC errors in the background

Technical Specifications

Memory Remapping	Allows system memory lost to PCI devices to be reclaimed above 4 GB, for use with operating systems that support more than 4 GB (Windows XP 64-bit edition, Linux)
Per-slot control	Allows individual slot configuration (option ROM., latency)
Adaptive cooling	Fan control parameters are set according to detected hardware configuration for optimal acoustics
Pre-boot diagnostics	Early (pre-video) critical errors are reported via beeps and blinks on the power LED

Other deployment & management features	
HP Client Management Solutions	<p>HP Client Management Solutions help simplify management of Workstations and significantly reduce total ownership costs. These solutions share a common design and are highly integrated due to the extensive work between HP and its partner Altiris.</p> <p>HP Client Manager Software is included free with all HP business PCs and Workstations. It enables central tracking, monitoring, and management of the hardware aspects of HP client systems:</p> <ul style="list-style-type: none"> • Get valuable hardware information such as CPU, memory, video, and security settings • Monitor system health to fix problems before they occur • Install drivers and BIOS updates without visiting each PC • Remotely configure BIOS and security settings • Automate processes to quickly resolve hardware problems <p>Additional Altiris solutions (fee-based) are available to address Workstation management challenges through the entire IT lifecycle including:</p> <ul style="list-style-type: none"> • Inventory assessment • Software license compliance • Personality migration • Software image deployment • Software distribution • Asset management • Client backup and recovery • Problem resolution <p>Visit http://www.hp.com/go/easydeploy for more information, to download HP Client Manager Software, and to evaluate the Altiris solutions.</p>
System Software Manager (free)	A free utility that detects and updates BIOS, device drivers, and management agent versions on your networked PCs and workstations
Altiris Local Recovery	Provides data and system file protection for HP business PCs to enable fast recovery of information that is accidentally deleted or if the system becomes corrupted. Designed for disconnected or seldom-connected users, Local Recovery protects your HP computer's data and system state by taking scheduled snapshots, which are then stored in a protected area on the local hard disk. System backup and disaster recovery is now simple and fast for all users, regardless of connectivity
Replicated Setup	Saves BIOS settings to diskette or USB disk-on-key in human readable file. Repset.exe utility can then replicate these settings on machines being deployed without entering ROM-based F10 setup
Software Restore CD	Restores computer to its original factory shipping image
Asset Tag	<ul style="list-style-type: none"> • Repository for storing company-specific property asset numbers for easy tracking • Initially set equal to the system serial number • Stored in a protected section of non-volatile memory that can be accessed and modified with the F10 Setup program
DIMM Serial Presence Detect	Detects whether or not memory DIMMs are present and their type
Hard drive serial number, model, and manufacturer	Hard drive manufacturer, model, and serial number is stored in the hard drive firmware and reported in ROM-based F10 setup

Technical Specifications

System serial number, model, & manufacturer	System serial number, model, & manufacturer stored in a non-volatile memory and can be retrieved with management SW or viewed in ROM-based F10 setup
ROM revision levels	Identifies system ROM revision levels and reports in ROM-based F10 setup Version is stored in an industry standard memory location (SMBIOS) so that management SW applications can use and report this information
Memory Change Alert (Requires HP Client Manager Software)	Alerts management console if memory is removed or changed
Ownership Tag	A user-defined string stored in non-volatile memory that is displayed in the BIOS splash screen
Hard drive interface Integrity Monitoring (CRC Checking)	A feature of SATA and SCSI, Cyclic Redundancy Checking provides data transfer verification and proactive notification of hard drive data transmission problems with recommendations for enhancing system performance. It detects all the following errors' types: <ul style="list-style-type: none"> • single bit errors • double bit errors • an odd number of errors • error bursts up to 32-bits long
Drive Self Tests (DPS)	<ul style="list-style-type: none"> • Drive Protection System (Adaptec and LSI SCSI controllers do not offer DPS) • A diagnostic hard drive self test. It scans critical physical components and every sector of the hard drive for physical faults and then reports any faults to the user. • Running independently of the operating system, it can be accessed through the computer's setup procedure. It produces an evaluation on whether the hard drive is the source of the problem and needs to be replaced. <p>The system expands on the Self-Monitoring, Analysis, and Reporting Technology (SMART), a continuously running systems diagnostic that alerts the user to certain types of failures DPS Access through F10 Setup during Boot (F10 diagnostic access not available with SCSI drives)</p>
SMART Technology (Self-Monitoring, Analysis and Reporting Technology)	Allows hard drives to monitor their own health and to raise flags if imminent failures were predicted Predicts failures before they occur. Tracks fault prediction and failure indication parameters such as re-allocated sector count, spin retry count, calibration retry count By avoiding actual hard drive failures, SMART hard drives act as "insurance" against unplanned user downtime and potential data loss from hard drive failure SMART I – Drive Failure Prediction SMART II – Off-Line Data Collection SMART III – Off-Line Read Scanning with Defect Reallocation

Security Features	
Access panel key lock (standard)	Prevents removal of the access panel and all internal components including optical and floppy drives
Smart Cover solenoid lock (optional)	Prevents removal of the access panel and all internal components including optical and floppy drives. Eliminates the need for a physical key by enabling password-protected locking & unlocking by a local or remote user.
Padlock (optional)	Prevents entire system theft and discourages access panel removal. 7mm diameter padlock loop at rear of system.
Kensington Cable Lock (optional)	Prevents entire system theft only. 3mm x 7mm slot at rear of system.
Universal chassis clamp lock (optional)	The version without a cable discourages access panel removal and prevents theft of IO devices. The version with a cable additionally prevents entire system theft and allows multiple systems to be secured with a single cable.
Intrusion Sensor (optional)	Notifies a local or remote user when the chassis access panel has been opened.

Technical Specifications

Serviceability Features of System	
Access panel	Tool-less, one-handed
Optical drives	Tool-less
Floppy drive	Tool-less
Hard drives	Tool-less
Expansion cards	Tool-less
Chassis fan removal	Tool-less
Green user touch points	Yes, on tool-free internal chassis mechanisms
Color-coordinated cables and connectors	Yes
Memory	Tool-less, can be upgraded without removing any internal components
CPUs	Tool-less, can be upgraded without removing any internal components
Power supply diagnostic LED	Yes, dual function: AC OK & power OK
Power Button	Yes, ACPI multi-function
Power LED	Yes, dual color LED indicates normal operation and faults.
Hard drive activity LED	Yes
Internal speaker	Yes, used for pre-boot diagnostic beep codes
Dual Color Power and HD LED on Front of Computer (Indicates Normal Operations and Fault Conditions)	green – normal red – fault
System/Emergency ROM Flash Recovery with Video	Recovers corrupted system BIOS.
Configuration Record SW	Yes
Over-Temp Warning on Screen (Requires IM Agents)	Yes
OS CD (Restore OS CD)	Restores computer to its original factory shipping image
Restore CD	Restores the computer to its original factory shipping image
Flash ROM	Yes
3.3V Aux Power LED on System PCA	Yes
Dual Function 5V Aux Power LED (ON)/PS_ON LED (OFF) on System PCA	Yes
Diagnostic Power Switch LED on board	Yes
Clear Password Jumper	Yes
Clear CMOS Button	Yes
CMOS Battery Holder for easy Replacement	Yes
Processor ZIF Socket for easy Upgrade	Yes
DIMM Connectors for easy Upgrade	Yes

Technical Specifications

NIC LEDs (integrated) (Green & Amber)	Used to determine NIC status
ASF 1.0 support (Alert Standard Format)	Industry-standard specification for network alerting in operating system-absent environments
Dual function front power switch	Also acts as a reset switch when held for 4 seconds

Service and Support	On-site Warranty and Service (Note 1): This three-year, limited warranty and service offering delivers three years of on-site, next business-day (Note 2) service for parts and labor and includes free telephone support (Note 3) 24 x 7. Global coverage (Note 2) ensures that any product purchased in one country and transferred to another, non-restricted country will remain fully covered under the original warranty and service offering.
	NOTE 1 : Terms and conditions may vary by country. Certain restrictions and exclusions apply.
	NOTE 2 : On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.
	NOTE 3 : Technical telephone support applies only to HP-configured, HP and HP-qualified, third-party hardware and software. Toll-free calling and 24 x 7 support may not be available in some countries.

Technical Specifications - Audio

AC97 Integrated ADI 1981B Audio	Type	Integrated
	AC '97 Stereo Codec	Yes
	FM Synthesis Support	Yes – Yamaha XG Lite
	OPL3 FM Synthesis Support	Yes
	Sound Blaster Compatibility	Yes
	Audio Jacks	Microphone-In (20-K ohm Input Impedance); rear stereo and front analog microphone ports Line-In (12-K ohm Input Impedance) Line-Out * (less than 800 ohms Output Impedance, expects at least a 10-K ohm load) Headphone-Out (2.5 Ohms Output Impedance, expects at least a 32 ohm load)
	NOTE: *Internal Speaker Amplifier is for Internal Speaker only. External Speakers need to be powered externally.	
	Sampling	7 kHz – 48 kHz
	Wavetable Syntheses (software)	Yes – GM and FM Midi Support, Direct Music and Down Loadable Soundset (4 Meg DLS Level 1 and 2 Support)
	3D Positional Sound	No
	Digital Audio	Yes
	Analog Audio	Yes
	Number of Channels on Line-Out (mono/stereo)	Stereo (Left & Right channels)
	Internal Audio Speaker Power Rating	3W
Internal Speaker	Yes	
Hardware Equalizer for Internal Speaker	Fixed 7 Band ParametricEQ	
External Speaker Jack (Line-Out)	Yes	
Sound Blaster X-Fi XtremeMusic Audio Card (Windows XP Only)	Audio Quality	Total Harmonic Distortion + Noise at 1kHz (20kHz Low-pass filter) = 0.004%
	Signal to Noise Ratio (SNR)	Signal-to-Noise Ratio (20kHz Low-pass filter, A-Weighted) <ul style="list-style-type: none"> • Stereo Output: 109dB • Front and Rear Channels: 109dB • Center, Subwoofer and Side Channels: 109dB
	Sound Conversion	24-bit Analog-to-Digital conversion of analog inputs at 96kHz sample rate 24-bit Digital-to-Analog conversion of digital sources at 96kHz to analog 7.1 speaker output 24-bit Digital-to-Analog conversion of stereo digital sources at 192kHz to stereo output
	Recording/Sampling Rate	44.1, 48 and 96kHz

Technical Specifications - Audio

ASIO 2.0 support	16-bit/44.1kHz, 16-bit/48kHz, 24-bit/44.1kHz 24-bit/48kHz and 24-bit/96kHz with direct monitoring	
Enhanced SoundFont support	up to 24-bit resolution 24-bit/96kHz	
DACs	24-bit/192kHz	
Voice Support	128 voices	
Max. Channels in 3D Positional Audio	7.1	
EAX® ADVANCED HD™ 5.0 support	Yes including EAX® MacroFX™, EAX® PurePath™ and Environment FlexiFX™	
Connectors	FlexiJack (Performing a 3-in-1 function, Digital In / Line In / Microphone) via 3.50 mm minijack Line level out (Front / Rear / Center / Subwoofer / Rear Center) via 3.50 mm minijacks AUX_IN line-level analog input via 4-pin Molex connector on card One AD_Link (26 pin) connector for linking to the X-Fi I/O Console (upgrade option)	
Dimensions	7.25 x 5 x 0.9 in (18.42 x 12.7 x 2.29 cm)	
Additional product features	Movies	THX Certification Dolby Digital EX 6.1 Playback DTS-ES 6.1 Playback
	Music	X-Fi 24-bit Crystalizer CMSS-3D SuperRip
	Audio Creation	Pristine audio playback quality with a near transparent SRC engine Up to eight 24 bit hardware effects ASIO recording with latency as low as one millisecond 24-bit SoundFont® sampling 3D MIDI
	Gaming	EAX ADVANCED HD 5.0
	Software Bundle	Doom 3 Sound Blaster EAX patch Entertainment Mode Audio Creation Mode Game Mode Mode Switcher Audio Console Creative MediaSource Creative MediaSource DVD-Audio Player DTS Neo:6 Settings Karaoke Player Entertainment Center Smart Recorder SoundFont Bank Manager Speaker Connection Wizard THX Setup Console Vienna SoundFont Studio Volume Panel WaveStudio

Technical Specifications - Audio

Minimum System Requirements	System RAM	Console Launcher Creative Media Toolbox Creative Diagnostics
	Hard Disk	256 MB 600MB free space Available PCI 2.1 slot for the audio card CD-ROM/CD-RW or CD/DVD-ROM required for software installation
	Operating System	Microsoft Windows XP Service Pack 2 (SP2)

Technical Specifications - Communications

Broadcom BCM5751 NetXtreme Gigabit Ethernet Controller (PCIe)	Connector	RJ-45	
	Controller	Broadcom 5751 PCI-E 1.0a LAN Controller	
	Memory	Integrated 96Kb frame buffer memory	
	Data rates supported	10/100/1000 Mbps	
	Compliance	IEEE 802.3, 802.3AB and 802.3u compliant, 802.3x flow control	
	Bus architecture	PCI-E 1.0a	
	Data path width	X1	
	Data path speed	2.5Gbit per sec per direction transfer rate	
	Data transfer mode	Bus-master DMA	
	Hardware certifications	FCC class B, NRTL Mark Canada and United States, C-Tick for Australia, BSMI for Taiwan, VCCI for Japan, MIC for Korea, GOST for Russia	
	Power requirement	3.1 watts @ +3.3V AUX supply	
	Boot ROM support	Yes	
	Network transfer rate	10BASE-T (half-duplex)	10 Mbps
		10BASE-T (full-duplex)	20 Mbps
		100BASE-TX (half-duplex)	100 Mbps
		100BASE-TX (full-duplex)	200 Mbps
		1000BASE-T	1000 Mbps
	Environmental	Operating temperature	32° to 131° F (0° to 55° C)
		Operating humidity	85% at 131° F (55° C)
	Dimensions	4.4 x 2.2 x 0.08 in (11.2 x 5.5 x 0.2 cm)	
Operating system driver support	Microsoft Windows 2000 and XP, Red Hat Linux 7.2, 7.3 and Red Hat Enterprise Linux 3		
Management capabilities	WOL, PXE , Remote cable management		
Alerting	ASF 2.0		
Kit contents	Broadcom 5751, CD, Broadcom 5751 Netxtreme Gigabit PCIe NIC, drivers, quick install guide, product warranty statement		
<hr/>			
Intel Pro/1000 MT Gigabit PCI NIC	Connector	RJ-45	
	Controller	Intel 82540EM Gigabit Controller	
	Memory	Integrated 96Kb frame buffer memory	
	Data rates supported	10/100/1000 Mbps	
	Compliance	IEEE 802.1A, 802.1P, 802.1P, 802.1Q, 802.2, 802.3, 802.3AB and 802.3u compliant, 802.3x flow control	
	Bus architecture	PCI 2.2	
	Data path width	32-bit, 33/66 MHz bus interface	
	Data transfer mode	Bus-master DMA	
	Hardware certifications	FCC, B, CE, TUV- cTUVus Mark Canada and United States, TUV- GS Mark for European Union	
	Power requirement	1.48 watts @ +3.3V AUX supply with 5V tolerance	
	Boot ROM support	Yes	

Technical Specifications - Communications

Network transfer rate	10BASE-T (half-duplex) 10 Mbps
	10BASE-T (full-duplex) 20 Mbps
	100BASE-TX (half-duplex) 100 Mbps
	100BASE-TX (full-duplex) 200 Mbps
	1000BASE-T, 1000 Mbps
Environmental	Operating temperature 32° to 131° F (0° to 55° C)
	Operating humidity 85% at 131° F (55° C)
Dimensions	6.4 x 4.8 x 0.8 in (16.3 x 12.1 x 1.9 cm)
Operating system driver support	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux
Management capabilities	ACPI, WOL and DMI 2.0, PXE 2.0, WfM 2.0, Intel PROset II utility
Kit contents	Intel Pro/1000 MT Gigabit PCI NIC, CD containing Intel PROset II NIC drivers, quick install guide, product warranty statement

Technical Specifications - Controllers

U320 SCSI Controller - LSI 20320AR RAID 0,1 including external connector (required with SCSI HDDs)	Bus architecture	PCI-X (backward compatible with PCI)
	Number of supported devices	Up to 15 SCSI devices
	Interface protocol	64 bit, 133MHz PCI-X
	Host bus transfer rate	Up to 1MB/s
	SCSI data transfer rate	Up to 320 MB/s per channel
	SCSI Bus	Wide Ultra320, Low Voltage Differential, and Ultra Wide Single-Ended
	Internal connector	68-pin HD
	External connector	68 pin
	Total connectors	2
	Plug and Play Support	No
	Dimensions (H x L)	6.6 x 2.5 in (16.9 x 6.4 cm)
	Approvals	CE, VCCI, Canada, C-Tick, FCC class B, UL 94VO
	Operating system support	Microsoft Windows XP Professional Windows XP Professional x64 Edition
	Kit contents	Controller card, driver CD, LED cables, user documentation and warranty card.

Adaptec SCSI RAID 2120S Card	Dimensions (H x D)	2.5 x 6.6 in (6.4 x 16.8 cm) Low profile card
	RAID level	0, 1, 10, 5, 50, JBOD
	Data Transfer Rate	Up to 320 MB/s
	Cache Memory	64 MB (onboard)
	Device Support	Up to 15 SCSI devices
	Bus Type	64-bit/66 MHz PCI (Also support 32-bit/33 MHz PCI)
	Internal Connectors	One 68-pin high-density
	External Connectors	One 68-pin VHDCI
	System Requirements	Intel PC or equivalent with available PCI slot
	Operating Temperature	32° to 131° F (0° to 55° C)
	Power Requirements	4 amps @ +5V
	Operating System Support	Windows 2000 Professional, Windows XP Professional, Windows XP Professional x64 Edition
	Other	Optimized disk utilization Online RAID Level Migration Online capacity expansion Immediate RAID availability (background initialization) S.M.A.R.T. support
	Kit Contents	Controller card, driver CD, LED cables, user documentation and warranty card.

Technical Specifications - Hard Drives

Serial ATA 3.0-Gb/s Hard Drives	500 GB	Capacity	500,107,862,016 bytes			
		Height	1.0 in (2.54 cm)			
		Width	Media diameter: 3.5 in (8.89 cm) Physical size: 4 in (10.2 cm)			
		Interface	Serial ATA (3.0 Gb/s), Native Command Queuing enabled			
		Synchronous Transfer Rate (Maximum)	Up to 3 Gb/s			
		Buffer	16 MB			
		Seek Time (typical reads, includes controller overhead, including settling)	Single Track	1.3 ms		
			Average	20.0 ms		
			Full-Stroke	30 ms		
		Rotational Speed	7,200 rpm			
		Logical Blocks	976,773,168			
		Operating Temperature	41° to 131° F (5° to 55° C)			
		250 GB	250 GB	Capacity	250,059,350,016 bytes	
				Height	1 in (2.54 cm)	
Width	Media diameter: 3.5 in (8.89 cm) Physical size: 4 in (10.2 cm)					
Interface	Serial ATA (3.0 Gb/s)					
Synchronous Transfer Rate (Maximum)	Up to 3 Gb/s					
Buffer	8 Mbytes					
Seek Time (typical reads, includes controller overhead, including settling)	Single Track			1.0 ms		
	Average			8.5 ms		
	Full-Stroke			18 ms		
Rotational Speed	7,200 rpm					
Logical Blocks	488,397,168					
Operating Temperature	41° to 131° F (5° to 55° C)					

Technical Specifications - Hard Drives

160 GB	Capacity	163,928,604,672 bytes	
	Height	1.0 in (2.54 cm)	
	Width	Media diameter: 3.5 in (8.89 cm) Physical size: 4 in (10.2 cm)	
	Interface	Serial ATA (3.0 Gb/s)	
	Synchronous Transfer Rate (Maximum)	Up to 3 Gb/s	
	Buffer	8 Mbytes	
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.9 ms
		Average	9.3 ms
		Full-Stroke	18 ms
	Rotational Speed	7,200 rpm	
	Logical Blocks	320,173,056	
	Operating Temperature	41° to 131° F (5° to 55° C)	
	80 GB	Capacity	80,026,361,856 bytes
		Height	1.0 in (2.54 cm)
Width		Media diameter: 3.5 in (8.89 cm) Physical size: 4 in (10.2 cm)	
Interface		Serial ATA (3.0 Gb/s)	
Synchronous Transfer Rate (Maximum)		Up to 3 Gb/s	
Buffer		8 MB	
Seek Time (typical reads, includes controller overhead, including settling)		Single Track	2 ms
		Average	9.3 ms
		Full-Stroke	21 ms
Rotational Speed		7,200 rpm	
Logical Blocks		156,301,488	
Operating Temperature		41° to 131° F (5° to 55° C)	

Technical Specifications - Hard Drives

Serial ATA 1.5-Gb/s Hard 74 GB
Drives (10,000 rpm)

Capacity	74,355,769,344 bytes	
Height	1.0 in (2.54 mm)	
Width	Media diameter: 3.3 in (84mm) Physical size: 4 in (10.2 cm)	
Interface	Serial ATA	
Synchronous Transfer Rate (Maximum)	150 MB/s	
Buffer	8 MB	
Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.3 ms
	Average	4.5 ms
	Full-Stroke	10.2 ms
Rotational Speed	10,000 rpm	
Logical Blocks	145,226,112	
Operating Temperature	41° to 140° F (5 to 60° C)	

Ultra320 SCSI Hard 73 GB
Drives (10,000 rpm)

Capacity	73,407,865,856 bytes	
Height	1.0 in (2.54 cm)	
Width	3.5 in (8.9 cm)	
Interface	68 pin LVD SCSI	
Synchronous Transfer Rate (Maximum)	320 MB/s	
Buffer	8 Mbytes	
Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.3 msec
	Average	<4.5 msec
	Full-Stroke	<11.0 msec
Rotational Speed	10,000 rpm	
Logical Blocks	143,374,738	
Operating Temperature	40° to 130° F (5° to 55° C)	

Technical Specifications - Hard Drives

146 GB	Capacity	146,815,737,856 bytes		
	Height	1.0 in (2.54 cm)		
	Width	3.5 in (8.9 cm)		
	Interface	68 pin LVD SCSI		
	Synchronous Transfer Rate (Maximum)	320 MB/s		
	Buffer	8 Mbytes		
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.3 msec	
		Average	<4.5 msec	
		Full-Stroke	<11.0 msec	
	Rotational Speed	10,000 rpm		
	Logical Blocks	286,749,488		
	Operating Temperature	40° to 130° F (5° to 55° C)		
	300 GB	Capacity	300,000,000,000 bytes	
Height		1.0 in (2.54 cm)		
Width		3.5 in (8.9 cm)		
Interface		68 pin LVD SCSI		
Synchronous Transfer Rate (Maximum)		320 MB/s		
Buffer		8 Mbytes		
Seek Time (typical reads, includes controller overhead, including settling)		Single Track	0.3 msec	
		Average	<4.5 msec	
		Full-Stroke	<11.0 msec	
Rotational Speed		10,000 rpm		
Logical Blocks		585,937,500		
Operating Temperature		40° to 130° F (5° to 55° C)		

Technical Specifications - Hard Drives

Ultra320 SCSI Hard Drives (15,000 rpm)	36 GB	Capacity	36,420,075,520 bytes		
		Height	1.0 in (2.54 cm)		
		Width	3.5 in (8.9 cm)		
		Interface	68 pin LVD SCSI		
		Synchronous Transfer Rate (Maximum)	320 MB/s		
		Buffer	8 Mbytes		
		Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.3 msec	
			Average	<4.5 msec	
			Full-Stroke	<11.0 msec	
		Rotational Speed	15,000 rpm		
		Logical Blocks	71,132,960		
		Operating Temperature	40° to 130°F (5° to 55°C)		
			73 GB	Capacity	73,407,865,856 bytes
Height	1.0 in (2.54 cm)				
Width	3.5 in (8.9 cm)				
Interface	68 pin LVD SCSI				
Synchronous Transfer Rate (Maximum)	320 MB/s				
Buffer	8 Mbytes				
Seek Time (typical reads, includes controller overhead, including settling)	Single Track			0.3 msec	
	Average			<4.5 msec	
	Full-Stroke			<11.0 msec	
Rotational Speed	15,000 rpm				
Logical Blocks	143,374,738				
Operating Temperature	40° to 130°F (5° to 55° C)				
	146 GB			Capacity	146,815,737,856 bytes
		Height	1.0 in (2.5 cm)		
		Width	3.5 in (8.9 cm)		
		Interface	68 pin LVD SCSI		
		Synchronous Transfer Rate (Maximum)	320 MB/s		
		Buffer	8 Mbytes		
		Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.3 msec	
			Average	<4.5 msec	
			Full-Stroke	<11.0 msec	
		Rotational Speed	15,000 rpm		
		Logical Blocks	143,374,738		
		Operating Temperature	40° to 130°F (5° to 55°C)		

Technical Specifications - Removable Storage

USB Disk on Key	Dimensions (HxWxD)	0.9 x 0.7 x 3.9 in (2.3 x 1.8 x 9.8 cm)
	Weight	0.05 lb (0.02 kg)
	USB Specification	2.0
	Transfer Rate	Read-1023 KB/Sec; Write-850 KB/Sec
	Storage Media	Solid state flash memory, no moving parts
	Power Supply	USB Bus-powered, no external power required
	Capacity	256 MB

Technical Specifications - Input/Output Devices

PS/2 OR USB Standard Keyboard	Physical characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
		Dimensions (L x W x H)	18.0 x 6.4 x 0.98 in (45.8 x 16.3 x 2.5 cm)
	Electrical	Weight	2 lb (0.9 kg) minimum
		Operating voltage	+ 5VDC \pm 5%
	Environmental	Power consumption	50-mA maximum (with three LEDs ON)
		ESD	CE level 4, 15-kV air discharge
	Mechanical	EMI - RFI	Conforms to FCC rules for a Class B computing device
		Microsoft PC 99 - 2001	Functionally compliant
		Languages	38 available
		Keycaps	Low-profile design
		Switch actuation	55-g nominal peak force with tactile feedback
		Switch life	20 million keystrokes (using Hasco modified tester)
		Switch type	Contamination-resistant switch membrane
		Key-leveling mechanisms	For all double-wide and greater-length keys
		Cable length	6 ft (1.8 m)
		Microsoft PC 99 - 2001	Mechanically compliant
	Environmental	Acoustics	43-dBA maximum sound pressure level
		Operating temperature	50° to 122° F (10° to 50° C)
		Non-operating temperature	-22° to 140° F (-30° to 60° C)
		Operating humidity	10% to 90% (non-condensing at ambient)
		Non-operating humidity	20% to 80% (non-condensing at ambient)
		Operating shock	40 g, six surfaces
		Non-operating shock	80 g, six surfaces
		Operating vibration	2-g peak acceleration
		Non-operating vibration	4-g peak acceleration
		Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence	
	Operating system support	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux Workstation 3 and 4	
	Approvals	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC	
	Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS	
	Kit contents	Keyboard, keyboard software media, installation guide, warranty card, safety and comfort	

HP USB Smart Card Keyboard (ED707AA)	Physical characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
		Form factor	USB basic Smart Card keyboard
		Colors	Carbonite/Silver
		Dimensions (L x W x H)	18.2 x 6.3 x 1.3 in (46.3 x 16.1 x 3.3 cm)

Technical Specifications - Input/Output Devices

Electrical	Weight	2 lb (0.9 kg) minimum
	Operating voltage	+ 5VDC \pm 5%
	Power consumption	100-mA maximum (with four LEDs ON)
	System interface	USB Type A plug connector
	ESD	CE level 4, 15-kV air discharge
	EMI - RFI	Conforms to FCC rules for a Class B computing device
Mechanical	Microsoft PC 99 - 2001	Functionally compliant
	Languages	30+ available
	Keycaps	Low-profile design
	Switch actuation	55-g nominal peak force with tactile feedback
	Switch life	20 million keystrokes (using Hasco modified tester)
	Switch type	Contamination-resistant switch membrane
	Key-leveling mechanisms	For all double-wide and greater-length keys
	Cable length	6 ft (1.8 m)
	Microsoft PC 99 - 2001	Mechanically compliant
	Acoustics	43-dBA maximum sound pressure level
Environmental	Operating temperature	50° to 122° F (10° to 50° C)
	Non-operating temperature	-22° to 140° F (-30° to 60° C)
	Operating humidity	10% to 90% (non-condensing at ambient)
	Non-operating humidity	20% to 80% (non-condensing at ambient)
	Operating shock	40 g, six surfaces
	Non-operating shock	80 g, six surfaces
	Operating vibration	2-g peak acceleration
	Non-operating vibration	4-g peak acceleration
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence
SMARTCARD function	Support	All ISO 7816 smart cards
	Interface	Reads from and writes to all ISO7816-1, 2, 3, 4 memory and microprocessor smart cards (T=0, T=1)
	Chipset	SCM STCII
	Standard APIs supported	PC/SC, EMV2000, SET
	Power	USB Port
		Short circuit detection (protects smart card and reader)
		Power supply compliant with ISO7816 and EMV (5V, 60 mA)
		Supports 3-V and 5-V cards
	Power consumption	250-mA maximum draw (50 mA for the keyboard with three LEDs ON and 200-mA maximum startup current using a high-current, 60-mA smart card)

Technical Specifications - Input/Output Devices

	Communication	From card	Programmable from 9,600 baud to 115,200 baud
		From computer	Up to 38,400 baud
	Landing mechanism	Contact device	Friction contact
		Card insertions rating	Up to 100,000 insertion cycles
	Interface modes	USB communications through USB port SCM protocol Automatic card insertion/removal detection	
	Reader performance interface	USB connection	
	Electro-magnetic standards	Europe	89/336/CEE guideline
		USA	USAFCC part 15
Operating system support	Microsoft® Windows® 2000, Windows XP Home, Windows XP Professional, xpe, ce.net, Linux, XP-64		
Approvals	CE-Mark, UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC, JITC, EMV2000, USB-IF		
Ergonomic compliance	ANSI HFS 100, ISO 9241-4, TUVGS		
Kit contents	Keyboard, I/O Security and Documentation CD, , warranty card		
Smart card compatibility	HP	HP ProtectTools Smart Card	
	American Express	Amex Blue	
	Axalto (Schlumberger)	Cryptoflex 8K Cryptoflex 16K Cryptoflex 32K Cryptoflex 32K e-gate Cyberflex Access 64K Cyberflex Access 32K Cyberflex 32K e-gate Cyberflex 64K Cyberflex Palmera Payflex-S Payflex 1K Payflex 2K Payflex 4K Payflex 8K Prismera US DoD CAC	
	Cardlogix	CLXSU004KK4 CLXSU008KK5	
	Datakey	Model 300 Model 330	
	De La Rue	VisaCash	

Technical Specifications - Input/Output Devices

Gemplus	Gem Expresso GKK32K Gemclub Memo GemClub Micro GemXplore GemSafe
Infineon	SLE66C322P
SafLink (Litronic)	Forte
Sharp	Java Card
Oberthur	CosmopolIIC v4 CosmopolIIC v4.1 Cosmo ID-One GalatIIC v2.1 US DoD CAC
Memory Cards	
Atmel	AT24C01ASC AT24C02SC AT24C04SC AT24C08SC AT24C16SC AT24C32SC AT24C64SC AT24C128SC AT24C256SC AT24C512SC AT88SC153 AT88SC1608
Axalto (Schlumberger)	PrimeFlex Store 8K PrimeFlex Store 2K
nfineon	SLE4406 SLE4406E SLE4406E SE SLE4418 SLE4428 SLE4432 SLE4436E SLE4442 SLE5536
ISSI	IS23SC4418 IS23SC4428
ST	14C02
Telefonkarte	SLE4406 SLE4436 SLE5536
XICOR	X24026

Technical Specifications - Input/Output Devices

HP PS/2 Scroll Mouse	Dimensions	3.8 x 6.3 x 11.6 cm (1.5 x 2.5 x 4.6 in)	
	Weight	4.44 oz (126 g)	
	Environmental	Operating temperature	50° to 122° F (10° to 50° C)
		Non-operating temperature	-22° to 140° F (-30° to 60° C)
		Operating humidity	10% to 90% (non-condensing at ambient)
		Non-operating humidity	20% to 80% (non-condensing at ambient)
		Operating shock	40 g, 6 surfaces
		Non-operating shock	80 g, 6 surfaces
		Operating vibration	2 g peak acceleration
		Non-operating vibration	4 g peak acceleration
		Drop (out-of-box)	26 in (66 cm) on carpet, 6-drop sequence
		Drop (out-of-box)	1 m on asphalt tile over concrete, 6-drop sequence
	Electrical	Operating voltage	5 VDC \pm 10%
		Power consumption	15 mA
		System consumption	PS/2 mini-din connector
ESD		CE level 4, 15 kV air discharge	
EMI-RFI		Conforms to FCC rules for a Class B computing device	
Mechanical	Microsoft PC99 - 2001	Functionally compliant	
	Resolution	400 \pm 20% DPI	
	Tracking speed	10 in/s maximum	
	Acceleration	100 in/s	
	Switch actuation	65 g nominal peak force	
	Switch life	1,000,000 operations (using Hasco modified tester)	
	Switch type	Low force micro-switches	
	Tracking mechanism life	155 mi (250 km) at average speed of 10 in/s	
	Cable length	6 ft (1.8 m)	
	Microsoft PC99 - 2001	Mechanically compliant	
Scroll wheel	Width	8 mm	
	Diameter	0.99 in (25.2 mm)	
	Maximum rotation speed	30 mm/s	
	Switch type	Light force micro-switch	
	Switch life	1 million operations	
Regulatory approvals	Mechanical life	Minimum 200,000 revolutions	
	Compliant	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC	
	Compatibility	Operating system support	
		Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux Workstation 3 and 4	

Technical Specifications - Input/Output Devices

HP 2-button Optical Scroll Mouse (USB)	Dimensions (H x L x W)	1.5 x 4.5 x 2.5 in (3.8 x 11.6 x 6.3 cm)
	Weight	0.27 lb (0.12 kg)
	Cable length	72.8 in (185 cm)
	System requirements	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux Workstation 3 and 4

Spaceball 5000 USB (Windows XP only)	Physical characteristics	Dimensions (H x W x D)	3.0 x 6.0 x 8.4 in (7.6 x 15.2 x 21.3 cm)
		Ball Diameter	2.2 in (5.6 cm)
		Weight	2.1 lb (9.94 kg)
		Features	Six degrees of freedom motion control through the X, Y, Z axis (pitch, roll, yaw) Certified for leading CAD and DCC applications
	Environmental	Operating temperature	50° to 104° F (10° to 40° C)
		Non-operating temperature	43° to 140° F (6° to 60° C)
		Operating humidity	8% to 80% (non-condensing at ambient)
		Non-operating humidity	5% to 80% (non-condensing at ambient)
	Mechanical	Buttons	12 programmable (unshifted)
		Ball Force Range	0.5 - 8.2N/1.8 - 29.5 oz
		Ball Torque Range	0.085 – 0.33 oz-in. (6.91 Nmm)
		Resolution	10 bits
	Serial Specifications	Connector	USB 1.1 or greater
		Cable Length	12.8 ft. (3.9 m)
		Data Rate	USB model – 16 msec
		Flow Control	Xon/Xoff (on PS/2 model only)
	Software Drivers Available	USB model	Microsoft Windows XP Professional
	System Requirements	Disk Space	10 MB free disk space
	Regulatory Approvals	UL, cUL, EN 950, EN 60950, CSA, FCC, CE Mark, TUV, CISPR 22, EN 50082, IEC 1000 4-2, IEC 1000-4-3, AS/NZS, VCCI, BSMI, C-Tick	

Technical Specifications - Input/Output Devices

HP SpaceMouse Plus USB (Windows XP only)	Physical characteristics	Dimensions (H x W x D)	7.4 x 4.72 x 1.73 in (18.8 x 12.0 x 4.4 cm)
		Cap Diameter	2 x 6.5 x 6.6 mm
		Weight	1.5 lb (0.68 kg)
		Features	Six degrees of freedom motion control through the X, Y, Z axis (pitch, roll, yaw) Certified for leading CAD and DCC applications
	Environmental	Operating temperature	41° to 140° F (5° to 60° C)
		Non-operating temperature	-13° to 158° F (-25° to 70° C)
		Operating humidity	10 to 98 % RH (non-condensing)
		Non-operating humidity	10 to 98 % RH (non-condensing)
	Mechanical	Buttons	11 programmable (unshifted)
		Cap Force Range	0.2 N – 4.5 N
Cap Torque Range		4 Nmm to 100 Nmm	
Resolution		8 bit	
USB Specifications	Connector	USB 1.1 or greater	
	Cable Length	6.56 ft (2 m)	
	Data Rate	16 msec	
Software Drivers Available	Microsoft Windows XP Professional		
System Requirements	Disk Space	10 MB free disk space	
Regulatory Approvals	UL, cUL, EN 950, EN 60950, CSA, FCC, CE Mark, TUV, CISPR 22, EN 50082, IEC 1000 4-2, IEC 1000-4-3, AS/NZS, VCCI, BSMI, C-Tick		

HP SpacePilot 3D USB Intelligent Controller (model EF390AA)	Physical Characteristics	Dimensions (L x W x H)	9.3 x 5.6 x 2.0 in (236 x 143 x 53 mm)
		Weight	1.875 lb (0.85 kg)
	Mechanical	Palmrest	Sculpted
		Buttons	21+ programmable speed keys 15 reprogrammable
		LCD Viewing Area	(W x H) 4.1 x 1.2 in (102 x 30 mm)
		Active Area	(W x H) 3.9 x 1.0 in (98 x 26 mm)
		Display Format	240 x 64
		Motion Controller	Six degrees of freedom motion control through the X, Y, Z axis (pitch, roll, yaw)
	System Requirements	Device Sensitivity	Adjustable to preference
		Intel Pentium 4 or AMD Athlon processor based system	
20 megabytes free disk space for driver and plug-in installation (CD-ROM device required)			
Operating System Supported	USB 1.1 or 2.0		
	Microsoft Windows 2000 and XP		
Regulatory Approvals	FCC, CE		

Technical Specifications - Input/Output Devices

1394a FireWire 400 PCI card	Device Interface Protocol	IEEE-1394a	
	Data Rate	400 Mbps	
	Devices Supported	IEEE-1394 compliant devices	
	Bus Interface	PCI	
	Physical	Low profile PCI card with a full height bracket	
	Environmental	Operating temperature	41° to 95° F (5° to 35° C)
		Non-operating temperature	158° F (70° C) and above
		Relative humidity	10% to 90%
	Minimum System Requirements	Ports	2 rear and 2 front (depends on model of PC)
			Windows XP Professional, Windows XP Professional x64 Edition, Linux support with the HP Installer Kit for Linux
		Pentium II 266 or faster	
		32-MB RAM	
		1-GB Hard Drive	
		CD-ROM drive	
	Built in sound system		

Technical Specifications - Optical Devices

48X CD-ROM Drive	Form Factor	5.25-in, half-height, tray load	
	Mounting Orientation	Horizontal or vertical	
	Interface	ATAPI/EIDE	
	Dimensions (HxWxD)	1.63 x 5.83 x 7.27 in (4.13 x 14.6 x 18.5 cm)	
	Weight	1.76 lb (0.8 kg)	
	Data Transfer Rates - Read	Digital audio extraction (minimum) – 1,200 KB/s (8X) CD read – up to 7,200 KB/s (48X)	
	Media and Formats - Read	CD Media	stamped, CD-R, CD-RW (LS, HS, US)
		CD Capacities	180 MB (mode 2, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm, 80-minute)
		CD Formats	CD-DA, CD-ROM (Mode 1 and 2), CD-XA (Mode 2, Form 1 and 2), Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (Mode 2, Form 1 and 2, and CD-I Ready), CD-Extra, CD-Bridge, Video CD
		Access Times (typical reads, including settling)	CD-ROM Mode 1 < 125 ms Full Stroke CD < 210 ms Start-up Time (typical) < 7 s (single session), < 30 s (multi-session) Stop Time (typical) < 4 s Write Buffer Size 128 KB (minimum) Data Transfer Modes PIO Mode 4 (16.6 MB/s); Multi-word DMA mode 2 (16.6 MB/s); UltraDMA Mode 0 (16.7 MB/s); UltraDMA Mode 2 (33.3 MB/s)
	Power	Source	Four-pin, DC power receptacle
		DC Power Requirement	5 VDC ± 5% - 100 mV ripple p-p
			12 VDC ± 5% - 200 mV ripple p-p
		DC Current	5 VDC - < 1000 mA typical, < 1600 mA maximum
	12 VDC - < 600 mA typical, < 1400 mA maximum		
	Audio Output	Total Drive Power (standby mode)	< 2.5 Watt
		Line-Out	0.7 VRMS
		Signal-to-Noise Ratio	74 dB
	Configuration Jumper Block	Channel Separation	65 dB
		Master, slave, and cable select modes	
Operating Conditions (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)	
	Humidity	10% to 80%	
Certifications, Approvals	MMC-3 support, multi-read compliant, Microsoft WHQL certification, ACA AS/NZS 3548 class B, BSMI CNS 13438, CE Mark, C.I.S.P.R. Pub 22, TUV or VDE EN60950, EN 55022, EN55024, EMKO EN60950, EN 60825-1, UL 60950, CSA C22.2 60950-2000, CFR 21 part 1040 class 1, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, ANSI C63.4-1992 (FCC Class B)		

Technical Specifications - Optical Devices

Operating Systems Supported	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux Workstation 3
Supplied Software	None

16X/48X DVD-ROM Drive Height with +R Read Support	5.25-in, half-height, tray load	
Interface Type	ATAPI/EIDE	
Dimensions (W x H x D)	5.88 x 1.71 x 7.87 [max] in (149.5 x 43.25 x 200.0 [max] mm) (external, excluding bezel)	
Disc Formats	DVD-ROM (single and dual layer); DVD-video; DVD-R version 1.0 and 2.0; DVD-RW version 1.0 and 1.1; DVD-R multi-border; DVD+RW; DVD+R ; CD-ROM Mode 1 and 2; CD-DA; CD-ROM XA Mode 2, Form 1 and 2; CD-extra; CD-text; CD-I Mode 2, Form 1 and 2; CD-I ready; video CD, CD-bridge; PhotoCD (single and multi-session); CD-R; CD-RW	
Disc Capacity	DVD-ROM	4.7 GB (DVD-5), 8.54 GB (DVD-9), 9.4 GB (DVD-10), 3.95 GB (DVD-R version 1.0), 4.7 GB (DVD-R version 2.0), 4.7 GB (DVD-RW version 1.0 and 1.1), 4.7 GB (DVD+RW), 4.7G (DVD+R)
	CD-ROM	540 MB (Mode 1, 12 cm), 640 MB (Mode 2, 12 cm), 700 MB (80 minimum CD-R and CD-RW), 180 MB (8 cm)
Access Times (typical reads, including settling)	DVD-ROM Single Layer	120 ms
	CD-ROM Mode 1	90 ms
	Full Stroke DVD	240 ms (seek)
	Full Stroke CD	160 ms (seek)
	Startup Time	< 10 seconds (typical)
	Stop Time	< 4 seconds
	Data Transfer Modes	PIO Mode 4 (16.6 MB/s); Multi-word DMA mode 2 (16.6 MB/s); UltraDMA Mode 3 (44.4 MB/s)
Maximum Data Transfer Rates	CD-ROM Read	6000 KB/s (40X) Max
	DVD-ROM Read	21,600 KB/s (16X) Max
	Digital Audio Extraction	6000 KB/s (40X) Max
Power	Source	Four-pin, DC power receptacle
	DC Power Requirement	5 VDC \pm 5% – 100 mV ripple p-p 12 VDC \pm 5% – 200 mV ripple p-p
	DC Current	5 VDC – <800 mA typical, < 1000 mA maximum 12 VDC – < 870 mA typical, <1800 mA maximum
Audio Output	Line-Out	0.7 VRMS
	Signal-to-Noise Ratio	85 dB
	Channel Separation	65 dB
Configuration Jumper Block	Master, slave, and cable select modes	
Data Interface Connector	40-pin, shrouded and keyed, flat ribbon	

Technical Specifications - Optical Devices

Operating Environmental (all conditions non-condensing)	Temperature (operating)	41° to 122° F (5° to 50° C)
	Relative Humidity (operating)	10% to 85%
	Maximum Wet Bulb Temperature (operating)	86° F (30° C)
Certifications, Approvals	MMC II support, multi-read certification, Microsoft WHQL certification, ACA AS/NZS 3548 class B, CNS 13438, C.I.S.P.R. Pub 22, TUV or VDE EN60950, EN 55022, EN55024, EMKO EN60950, EN 60825-1, UL 60950, CSA C22.2 60950-2000, CFR 21 part 1040 class 1, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, ANSI C63.4-1992	
Operating Systems Supported	Windows 2000, XP Professional, and XP Professional x64 Edition Red Hat Linux 7.2, 7.3 WS3 and WS4 Versions	
Kit Contents	16X/40X DVD-ROM Drive, InterVideo WinDVD MPEG Movie Playback software, audio cable, and installation guide.	

HP 48X CD-RW

Form Factor	5.25-inch, half-height, tray-load	
Mounting Orientation	Horizontal or vertical	
Interface	ATAPI/EIDE	
Dimensions (HxWxD)	1.63 x 5.75 x 7.27 [max] in (4.13 x 14.6 x 18.5 [max] cm) (external, excluding bezel)	
Weight (max)	2.0 lb (0.9 kg)	
Read Only Disc Parameters	Data Transfer Rates - Read	Digital audio extraction (minimum) - 1,800 KB/s (12X) CD read - up to 7,200 KB/s (48X)
	Media and Formats - Read	CD Media: stamped; CD-R; CD-RW (LS, HS, US) CD Capacities: 180 MB (mode 2, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm, 80-minute) CD Formats: CD-DA, CD-ROM (Mode 1 and 2), CD-XA (Mode 2, Form 1 and 2), Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (Mode 2, Form 1 and 2, and CD-I Ready), CD-Extra, CD-Bridge, Video CD

Technical Specifications - Optical Devices

Writeable Disc Parameters	Data Transfer Rates - Write	CD-R write - 2100 KB/s (14X) to 7200 KB/s (48X) CD-RW write - 600 KB/s (4X) CD-RW write (high speed) - 1500 KB/s (10X) to 1800 KB/s (12X) CD-RW write (ultra high speed) - 2400 KB/s (16X) to 4800 KB/s (32X)
	Media and Formats - Write	CD Media: CD-R; CD-RW (LS, HS, US) CD Capacities: 180 MB (mode 2, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm, 80-minute) CD Formats: CD-DA, CD-ROM (Mode 1 and 2), CD-XA (Mode 2, Form 1 and 2), Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (Mode 2, Form 1 and 2, and CD-I Ready), CD-Extra, CD-Bridge, Video CD
	Write Methods	Disc-at-once, session-at-once, track-at-once, incremental fixed and variable packet, multi-session
	Access Times (typical reads, including settling)	CD-ROM Mode 1 < 125 ms Full Stroke CD < 210 ms Start-up Time (typical) < 7 s (single session), < 30 s (multi-session) Stop Time (typical) < 4 s Write Buffer Size 2 MB Data Transfer Modes PIO Mode 4 (16.6 MB/s); Multi-word DMA mode 2 (16.6 MB/s); UltraDMA Mode 2 (33.3 MB/s)
Power	Source	Four-pin, DC power receptacle
	DC Power Requirement	5 VDC \pm 5%-100 mV ripple p-p 12 VDC \pm 5%-200 mV ripple p-p
	DC Current	5 VDC (< 1000 mA typical, < 1600 mA maximum) 12 VDC (< 600 mA typical, < 1400 mA maximum)
	Total Drive Power (standby mode)	< 2.5 Watt
Audio Output	Line-Out	0.7 VRMS
	Signal-to-Noise Ratio	74 dB
	Channel Separation	65 dB
Configuration Jumper Block	Master, slave, and cable select modes	
Operating Conditions	Temperature	41° to 122° F (5° to 50° C)
	Humidity	10% to 90% 10% to 90%

Technical Specifications - Optical Devices

Certifications, Approvals	MMC-3 support, multi-read compliant, Microsoft WHQL certification, ACA AS/NZS 3548 class B, BSMI CNS 13438, CE Mark, C.I.S.P.R. Pub 22, TUV or VDE EN60950, EN 55022, EN55024, EMKO EN60950, EN 60825-1, UL 60950, CSA C22.2 60950-2000, CFR 21 part 1040 class 1, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, ANSI C63.4-1992 (FCC Class B)
Operating Systems Supported	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux Workstation 3
Supplied Software (for Windows XP)	Roxio Digital Media Plus: Create or copy CDs and DVDs, including music and data CDs, and data DVDs Dantz Retrospect Express: Back up systems to CD, DVD, or tape media.

HP 48X CD-RW/DVD-ROM Combo Drive

Form Factor	5.25-inch, half-height, tray-load
Mounting Orientation	Horizontal or vertical
Interface	ATAPI/EIDE
Dimensions (HxWxD)	5.77 x 1.71 x 7.87 [max] in (14.66 x 4.34 x 20.0 [max] cm) (external, excluding bezel)
Weight (max)	2.6 lb (1.2 kg)
Read Only Disc Parameters	<p>Data Transfer Rates - Read</p> <p>CD read - 7200 KB/s (48X) Max Digital audio extraction (minimum) - 1,800 KB/s (12X)</p> <p>DVD ROM read - 21,632 KB/s (16X) Max</p> <p>Media and Formats - Read</p> <p>CD Media: stamped; CD-R; CD-RW (LS, HS, US) CD Capacities: 180 MB (mode 2, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm, 80-minute) CD Formats: CD-DA, CD-ROM (Mode 1 and 2), CD-XA (Mode 2, Form 1 and 2), Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (Mode 2, Form 1 and 2, and CD-I Ready), CD-Extra, CD-Bridge, Video CD DVD Media: stamped (single and double layer); DVD+R; DVD+RW; DVD+R DL; DVD-R; DVD-RW DVD Capacities: 4.7 GB (DVD-5), 8.54 GB (DVD-9), 9.4 GB (DVD-10), 3.95 GB (DVD-R version 1.0), 4.7 GB (DVD-R version 2.0), 4.7 GB (DVD-RW version 1.0 and 1.1), 4.7 GB (DVD+RW), 4.7G (DVD+R) DVD Formats: DVD-ROM (single and dual layer); DVD-video; DVD-R version 1.0 and 2.0; DVD-RW version 1.0 and 1.1; DVD-R multi-border ; DVD+R version 1.2 (including multi-session); DVD+R DL version 1.0; DVD+RW version 1.2</p>

Technical Specifications - Optical Devices

Writeable Disc Parameters	Data Transfer Rates - Write	CD-R write - 2100 KB/s (14X) to 7200 KB/s (48X) CD-RW write - 600 KB/s (4X) CD-RW write (high speed) - 1500 KB/s (10X) to 1800 KB/s (12X) CD-RW write (ultra high speed) - 2400 KB/s (16X) to 4800 KB/s (32X)
	Media and Formats - Write	CD Media: CD-R; CD-RW (LS, HS, US) CD Capacities: 180 MB (mode 2, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm, 80-minute) CD Formats: CD-DA, CD-ROM (Mode 1 and 2), CD-XA (Mode 2, Form 1 and 2), Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (Mode 2, Form 1 and 2, and CD-I Ready), CD-Extra, CD-Bridge, Video CD
	Write Methods	Disc-at-once, session-at-once, track-at-once, incremental fixed and variable packet, multi-session
Access Times (typical reads, including settling)	Random DVD	< 140 ms
	Random CD	< 125 ms, (typical)
	Full Stroke DVD	< 250 ms
	Full Stroke CD	< 210 ms
	Startup Time (single)	< 7 seconds (typical)
	Startup Time (multi-session)	< 30 seconds (typical)
	Stop Time (typical)	< 4 s
	Cache Buffer	2 MB (minimum)
	Data Transfer Modes	ATA PIO mode 4 (16.7 MB/s); ATA Multi-word DMA mode 2 (16.7 MB/s); ATA UltraDMA Mode 3 (44 Mbytes/s)
	Power	Source
DC Power Requirement		5 VDC \pm 5%-100 mV ripple p-p 12 VDC \pm 5%-200 mV ripple p-p
DC Current		5 VDC (< 1000 mA typical, < 1600 mA maximum)
		12 VDC (< 600 mA typical, < 1400 mA maximum)
Audio Output	Total Drive Power (standby mode)	< 2.5 Watt
	Line-Out	0.7 VRMS
	Signal-to-Noise Ratio	74 dB
Configuration Jumper Block	Channel Separation	65 dB
	Master, slave, and cable select modes	
Data Interface Connector	40-pin, shrouded and keyed, flat ribbon	

Technical Specifications - Optical Devices

Operating Conditions (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)
	Relative humidity	10% to 90%
	Maximum wet bulb temperature	86° F (30° C)
Certifications, Approvals	MMC-3 support, multi-read compliant, Microsoft WHQL certification, ACA AS/NZS 3548 class B, BSMI CNS 13438, CE Mark, C.I.S.P.R. Pub 22, TUV or VDE EN60950, EN 55022, EN55024, EMKO EN60950, EN 60825-1, UL 60950, CSA C22.2 60950-2000, CFR 21 part 1040 class 1, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, ANSI C63.4-1992 (FCC Class B)	
Operating Systems Supported	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat WS3 and WS4 Versions	
Supplied Software (for Windows XP)	Roxio Cineplayer Movie Playback Roxio Digital Media Plus: Create or copy CDs and DVDs, including music and data CDs, and data DVDs	

16X DVD+/-RW, Dual-Layer (Win and RHWS3)	Height	5.25-inch, half-height, tray-load		
	Orientation	Either horizontal or vertical		
	Interface Type	ATAPI/EIDE		
	Disc Recording Capacity	4.7 GB (single-layer), 8.5 GB (double-layer)		
	Dimensions (W x H x D)	5.9 x 1.7 x 7.9 in (15.0 x 4.4 x 20.0 cm)		
	Weight (maximum)	2.6 lb (1.2 kg)		
	Recording Method	Disc-at-once, Track-at-once, and Session-at-once; Variable Packet and Fixed Packet		
	Write Support	DVD+R (1.3), DVD+R DL (1.0), DVD+RW (1.2), DVD-R (2.0), DVD-RW (1.1), CD-R (OBII Vol2.0 Rev 1.2), CD-RW (LS, HS, US)		
	Read Support	DVD-ROM (single- and dual-layer), DVD-Video, DVD+R (include multisession), DVD+RW, DVD-R (incl. multiborder), DVD-RW, DVD-MRW; CD-ROM Mode 1, CD-ROM XA (Mode 2, forms 1 and 2), CD-TEXT, Photo CD single- and multi-session), CD-DA (Audio CD), CD-Extra, CD-R, CD-RW (supports AM2), VCD, CD-I, UDF (1.02 and 1.50), CD-MRW		
	Write Speed (maximum)	DVD+R	16X CAV (21,600 KB/s), 8x ZCLV (10,800 KB/s), 2.4-8x CLV (3250-10,800 KB/s)	
		DVD+RW	2.4-4X CLV (3250-5400 KB/s)	
		DVD-R	2-4X CLV (2700-5400 KB/s), 8X ZCLV (10,800 KB/s)	
		DVD-RW	2-4X CLV (2700-5400 KB/s)	
	Read Speed (maximum)	CD-R	16-40X CAV (2400-6000 KB/s)	
CD-RW (US)		4-24X CLV (600-3600 KB/s)		
DVD-ROM		5-16X CAV (6750 - 21,600 KB/s)		
Access Time (typical reads, including settling)	DVD+R, DVD+RW, DVD-R, DVD-RW	4-8X CAV (5400 - 10,800 KB/s)		
	CD-ROM, CD-R, CD-RW, CD-Audio	16-40X CAV (2400 to 6000 KB/s)		
	Random DVD	< 130 ms (typical)		
	Random CD	< 120 ms, (typical)		
	Full Stroke DVD	< 240 ms (seek)		
	Full Stroke CD	< 200 ms (seek)		

Technical Specifications - Optical Devices

	Startup Time (single)	< 7 seconds (typical)
	Startup Time (multi-session)	< 30 seconds (typical)
	Stop Timex	< 4 seconds
	Cache Buffer	2 MB (minimum)
	Data Transfer Modes	ATA PIO mode 4 (16.7 MB/s); ATA Multi-word DMA mode 2 (16.7 MB/s); ATA UltraDMA Mode 3 (44.4 MB/s) (default on most HP xw workstations)
Power	Source	Four-pin, DC power receptacle
	DC Power Requirement	5 VDC \pm 5%-100 mV ripple p-p 12 VDC \pm 10%-200 mV ripple p-p
	DC Current	5 VDC (< 2000 mA typical, < 2500 mA maximum) 12 VDC (< 700 mA typical, < 2000 mA maximum)
	Total Drive Power (standby mode)	< 2.5 Watt
Audio Output	Line-Out	0.7 VRMS
	Signal-to-Noise Ratio	74 dB
	Channel Separation	65 dB
Operating Environmental (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)
	Relative humidity	10% to 90%
	Maximum wet bulb temperature	86° F (30° C)
System Configuration	Intel Pentium IV Processor or later with 128 MB of memory (required); 256 MB recommended 2-D or 3-D graphics cards on primary disk drive for operating system and application software; second disk drive for audio and video data	
Operating Systems Support	Windows 2000, XP Professional, and XP Professional x64 Edition Red Hat Linux 7.2, 7.3 WS3 and WS4 Versions (Red Hat Linux 7.2, 7.3, 8, 9.0 may require additional third party software to make full use of this device)	
Regulatory Approvals	MPC-3 and MMC-4 compliant, multi-read certified, ATA Spec X3T9.2, ATAPI Spec T13.1153D, ANSI C63.4-1992, UL 60950, ACA AS/NZS 3548, CB Bulletin No. 96A, CSA C22.2 No. 60950, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, EMKO-TSE 07/94, TUV EN60950, EN60825-1, MIC Class B, BSMI-CNS 13438, CE EN60950, EN55022:1998 and EN55024, Microsoft Logo for Windows XP, relevant parts of IEC 61000-4.	
Option Kit contents	16X DVD \pm R/ \pm RW Drive, InterVideo WinDVD, InterVideo WinDVD Creator, Roxio Easy Media Creator. NOTE: This DVD writer kit does not include any software for burning DVDs on Linux. DVD burning is supported with the 'growisofs' command. CD burning is supported with the 'cdrecord' command. Red Hat Enterprise Linux WS 3 distribution includes both 'cdrecord' and 'growisofs'. Red Hat Linux 7.2, 7.3, 8, 9.0 distributions only include 'cdrecord'. Therefore DVD burning is only supported on WS 3.	

Technical Specifications - Optical Devices

16X DVD+/-RW, Dual-Layer, with LightScribe Direct Disc Labeling	Form Factor Orientation Interface Dimensions (HxWxD) Weight (maximum) Read Only Disc Parameters	5.25-inch, half-height, tray-load Horizontal or vertical ATAPI/EIDE 5.9 x 1.7 x 7.9 in (15.0 x 4.4 x 20.0 cm) 2.6 lb (1.2 kg) Data Transfer Rates - Read	DVD-ROM, DVD-video read - 5-16X (6750 - 21,600 KB/s CAV) DVD-video playback, DVD+R, DVD+RW, DVD-R, DVD-RW - 4-8X (5400 - 10,800 KB/s CAV) CD-audio playback - 8x (1200 KB/s CLV) Digital audio extraction (minimum) - 12X (1,800 KB/s CAV) CD-ROM, CD-R, CD-RW, CD-Audio read - 16-40X (2400 to 6000 KB/s CAV) Media and Formats - Read
			CD Media: stamped; CD-R; CD-RW (supports AM2) (LS, HS, US) CD Capacities: 180 MB (mode 2, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm, 80-minute) CD Formats: CD-DA, CD-ROM (Mode 1 and 2), CD-XA (Mode 2, Form 1 and 2), Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (Mode 2, Form 1 and 2, and CD-I Ready), CD-Extra, CD-Bridge, Video CD, UDF (1.02 and 1.50) DVD Media: stamped (single and double layer); DVD+R; DVD+RW; DVD+R DL; DVD-R; DVD-RW DVD Capacities: 4.7 GB (DVD-5), 8.54 GB (DVD-9), 9.4 GB (DVD-10), 14.1 GB (DVD-14), 17.0 GB (DVD-18), 3.95 GB (DVD-R version 1.0), 4.7 GB (DVD-R version 2.0), 4.7 GB (DVD-RW version 1.0 and 1.1), 4.7 GB (DVD+RW), 4.7G (DVD+R), 1.46 GB (DVD+R, 8cm), 1.46 GB (DVD+RW, 8cm) DVD Formats: DVD-ROM (single and dual layer); DVD-video; DVD-R version 1.0 and 2.0 (including multi-border); DVD-RW version 1.0 and 1.1; DVD+R version 1.3 (including multi-session); DVD+R DL version 1.0; DVD+RW version 1.2

Technical Specifications - Optical Devices

Writeable Disc Parameters	Data Transfer Rates - Write	<p>CD-R write - 16-40X (2400-6000 KB/s CAV) CD-RW write - 4X (600 KB/s CLV) CD-RW write (high speed) - 10X (1500 KB/s CLV) CD-RW write (ultra high speed) - 16-24X (2400-3600 KB/s ZCLV) DVD+R - 6-16X (8100-21,600 KB/s CAV), 8x (10,800 KB/s ZCLV), 2.4-4x (3250-5400 KB/s CLV) DVD+R DL - 2.4 (3250 KB/s CLV) DVD+RW - 2.4-4X (3250-5400 KB/s CLV) DVD-R - 2-4X (2700-5400 KB/s CLV), 8X (10,800 KB/s ZCLV) DVD-RW - 2-4X (2700-5400 KB/s CLV)</p>
	Media and Formats - Write	<p>CD Media: CD-R (OBII Vol2.0 Rev 1.2), CD-RW (LS, HS, US) CD Capacities: 180 MB (mode 1, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm, 80-minute) CD Formats: CD-DA, CD-ROM (Mode 1 and 2), CD-XA (Mode 2, Form 1 and 2), Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (Mode 2, Form 1 and 2, and CD-I Ready), CD-Extra, CD-Bridge, Video CD, UDF (1.02 and 1.50) DVD Media: DVD+R, DVD+R DL, DVD+RW, DVD-R, DVD-RW DVD Capacities: 4.7 GB (DVD-5), 8.54 GB (DVD-9), 4.7 GB (DVD-R version 2.0), 4.7 GB (DVD-RW version 1.1), 4.7 GB (DVD+RW version 1.3), 4.7G (DVD+R version 1.2)), 1.46 GB (DVD+R, 8cm), 1.46 GB (DVD+RW, 8cm) DVD Formats: DVD-R version 1.0 and 2.0 (including multi-border); DVD-RW version 1.0 and 1.1; DVD+R version 1.3 (including multi-session); DVD+R DL version 1.0; DVD+RW version 1.2</p>
	Write Methods	<p>Disc-at-once, session-at-once, track-at-once, incremental fixed and variable packet, multi-session</p>
LightScribe Direct Disc Labeling Parameters	Media Supported	<p>CD-R: LightScribe Version 1.0 DVD+R: LightScribe Version 1.0</p>
	Resolution	<p>Dots per inch: 600 Tracks per inch: 500-1600 (mode dependent)</p>
	Labeling Times	<p>Draft quality: < 20 min Normal quality: < 28 min Best quality: < 36 min</p>

Technical Specifications - Optical Devices

Access Times (typical reads, including settling)	Random DVD	< 130 ms (typical)
	Random CD	< 120 ms (typical)
	Full Stroke DVD	< 240 ms
	Full Stroke CD	< 200 ms
	Startup Time (single)	< 7 seconds (typical)
	Startup Time (multi-session)	< 30 seconds (typical)
	Stop Time (typical)	< 4 s
	Cache Buffer	2 MB
	Data Transfer Modes	ATA PIO mode 4 (16.7 MB/s); ATA Multi-word DMA mode 2 (16.7 MB/s); ATA UltraDMA Mode 3 (44.4 MB/s) (default on most HP xw series workstations)
	Power	Source
DC Power Requirement		5 VDC \pm 5%-100 mV ripple p-p 12 VDC \pm 5%-200 mV ripple p-p
DC Current		5 VDC (< 1000 mA typical, < 1600 mA maximum) 12 VDC (< 600 mA typical, < 1400 mA maximum)
Total Drive Power (standby mode)		< 2.5 Watt
Audio Output	Line-Out	0.7 VRMS
	Signal-to-Noise Ratio	74 dB
	Channel Separation	65 dB
Operating Conditions (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)
	Relative humidity	10% to 90%
	Maximum wet bulb temperature	86° F (30° C)
Certifications, Approvals	MMC-4 compliant, multi-read compliant, Microsoft WHQL certification, ACA AS/NZS 3548 class B, BSMI CNS 13438, CE Mark, C.I.S.P.R. Pub 22, TUV or VDE EN60950, EN 55022, EN55024, EMKO EN60950, EN 60825-1, UL 60950, CSA C22.2 60950-2000, CFR 21 part 1040 class 1, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, ANSI C63.4-1992 (FCC Class B), relevant parts of IEC 61000-4.	
Operating Systems Supported	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition Red Hat Linux 7.3 WS3 and WS4 Versions (LightScribe labeling functionality not supported on Linux)	

Technical Specifications - Optical Devices

Supplied Software (for Windows XP)

Roxio Cineplayer Movie Playback

Roxio Digital Media Plus: Create or copy CDs and DVDs, including music and data CDs, and data DVDs

Roxio MyDVD for DVD authoring

NOTE: LightScribe Direct Disc Labeling is supported only on 32-bit Windows XP in the launch timeframe for the xw4300. Support for Windows XP Professional x64 Edition is anticipated to be available some time after the launch, and will require software updates. There is no support for LightScribe labeling under Linux. The drive will operate as a DVD writer under these other operating systems, but will not be available in software applications as a LightScribe "printer".

NOTE: This DVD writer kit does not include any software for burning DVDs on Linux. DVD burning is supported with the 'growisofs' command. CD burning is supported with the 'cdrecord' command. Red Hat Enterprise Linux WS 3 distribution includes both 'cdrecord' and 'growisofs'. Red Hat Linux 8, 9.0 distributions only include 'cdrecord'. Therefore DVD burning is only supported on WS 3.

Technical Specifications - Graphics

<p>NVIDIA Quadro NVS 285 Form Factor with TurboCache Technology PCIe Graphics</p>	<p>Graphics Controller</p> <p>Bus Type</p> <p>Memory</p> <p>Connectors</p> <p>Dimensions</p> <p>Overlay planes</p> <p>Multi-monitor support</p> <p>Maximum pixel clock</p> <p>RAMDAC</p> <p>High-definition Video Processor (HDVP)</p> <p>Available graphics drivers</p>	<p>NVIDIA Quadro NVS 285 with TurboCache Technology 128MB PCIe Dual Head</p> <p>Low profile, both ATX and low profile brackets included</p> <p>Integrated Quadro 285 2D graphics processor unit (GPU)</p> <p>PCI-Express</p> <p>128 MB DDR (64 MB local frame buffer plus 64 MB of shared system memory via TurboCache technology)</p> <p>NOTE: The graphics card uses part of the total system memory (RAM) for graphics performance. System memory dedicated to graphics performance is not available for other use by other programs.</p> <p>DMS-59 to dual-DVI Y-cable or dual-VGA Y-cable</p> <p>Low-profile, 2.586 x 6.6 in (6.57 x 16.76 cm)</p> <p>One 16-bit Video overlay plane</p> <p>Dual analog or digital monitors</p> <p>350 MHz</p> <p>Dual 350 MHz (integrated)</p> <p>Full screen, full frame video playback of HDTV and DVD content</p> <p>DVD-ready motion compensation for MPEG-2</p> <p>Independent hardware color controls for video overlay</p> <p>Hardware color-space conversion (YUV 4:2:2 and 4:2:0)</p> <p>IDCT motion compensation</p> <p>5-tap horizontal by 3-tap vertical filtering</p> <p>8:1 up/down scaling</p> <p>Microsoft Windows 2000 and Microsoft Windows XP (Provides full native Dual View mode, Span or Big Desktop mode, and Clone mode)</p> <p>HP qualified drivers may be preloaded or available from the HP support Web site:</p> <p>http://www.hp.com/country/us/en/support.html?pageDisplay=drivers</p>
--	---	--

<p>ATI FireGL V3100 Graphics Card (PCI Express)</p>	<p>Form factor</p> <p>Graphics controller</p> <p>Bus type</p> <p>Memory</p> <p>Connectors</p> <p>Multi-monitor support</p> <p>RAMDAC</p>	<p>ATX</p> <p>RV370</p> <p>PCI-Express x16</p> <p>128 MB 200MHz DDR unified frame buffer, Z-buffer and Texture storage</p> <p>1 DVI-I analog/digital and 1 VGA analog monitor output</p> <p>Dual integrated display controllers supporting up to 2048x1536 @ 85Hz on both displays</p> <p>Dual 400 MHz integrated</p>
--	--	---

Technical Specifications - Graphics

Architecture features	<ul style="list-style-type: none"> 128-bit memory interface 128-bit IEEE floating-point precision 24-bits per RGBA color precision 4-bit sub-pixel precision 2 parallel geometry engines 4 parallel pixel pipelines 2x/4x/6x FSAA Hardware accelerated antialiased points and lines Hardware OpenGL overlay planes Hardware accelerated two-sided lighting Hardware accelerated clipping planes Hardware accelerated occlusion culling Hardware accelerated clip planes
Shading architecture	<ul style="list-style-type: none"> Smartshader™ technology Programmable pixel and vertex shaders 16 textures per pass Pixel shaders up to 160 instructions with 32-bit floating point precision for each RGBA component Multiple render target support Shadow volume rendering acceleration High precision 10-bit per channel frame buffer support
Supported graphics APIs	<ul style="list-style-type: none"> OpenGL 1.5 DirectX 9.0
Available graphics drivers	<p>Windows XP Professional, Windows XP Professional x64 Edition, Linux Xfree86HP qualified drivers may be preloaded or available from the HP support Web site:</p> <p>http://welcome.hp.com/country/us/eng/software_drivers.html.</p>
Maximum resolution	<ul style="list-style-type: none"> DVI-I output – drives digital display at resolutions up to 1600x1200 Internal 400MHz RAMDACs – drives dual analog displays up to 2048x1536 @ 85Hz each

NVIDIA Quadro FX 540 PCI-Express Graphics Card	Form Factor	<ul style="list-style-type: none"> ATX, 4.376" x 7.0" Single slot
	Graphics Controller	NVIDIA NV43GL
	Bus Type	PCI-Express x16, <75W power consumption
	RAMDAC	Dual 400 MHz integrated
	Memory	<ul style="list-style-type: none"> 128 MB 275 MHz DDR SDRAM unified frame buffer, Z-buffer and Texture storage 8.8 GB/sec graphics memory bandwidth
	Connectors	DVI-I + VGA + 10-pin HDTV Out (HD cable purchased separately)
	Multi-monitor support	Integrated analog display controller supporting a single analog display at 2048x1536 @ 75Hz, one digital display at 1600x1200 @ 60Hz.

Technical Specifications - Graphics

Additional product features	<p>128 KB BIOS 3.3V Flash ROM reprogrammable by SW</p> <p>Hardware accelerated Overlay Planes</p> <p>Hardware accelerated two-sided lighting</p> <p>Hardware accelerated antialiased points and lines</p> <p>3D Volumetric Texture support</p> <p>Hardware accelerated Occlusion Culling</p> <p>Compliant with Microsoft/Intel PC2001 Workstation requirements</p> <p>Video Timings compliant with VESA DMT 1.0 and VESA GTF 1.0 specifications</p> <p>DDC2B+ Monitor support on all OS platforms</p> <p>ACPI Version 1.0b Power Management support (all modes)</p>
Shading architecture	<p>Fully programmable GPU (OpenGL 1.5/DirectX 9.0c class)</p> <p>Long fragment programs (up to 65,536 instructions)</p> <p>Long vertex programs (up to 65,536 instructions)</p> <p>Looping and subroutines (up to 256 loops per vertex program)</p> <p>Dynamic flow control</p> <p>Conditional execution</p> <p>Optimized compilers for Cg, OpenGL shading language, and Microsoft HLSL</p>
Supported graphics APIs	<p>OpenGL 1.5 ICD with immediate mode support for all OGL primitive types</p> <p>DirectX 9.0c</p>
Available graphics drivers	<p>HP-tested: Microsoft Windows XP, Windows 2000, and Linux</p> <p>HP qualified drivers may be preloaded or available from the HP support Web site:</p> <p>http://welcome.hp.com/country/us/eng/software_drivers.html.</p>
Maximum Resolution	<p>DVI-I output - drives digital display at resolutions up to 1600x1200 @ 60Hz</p> <p>Internal 400MHz RAMDACs – drives dual analog display up to 2048x1536 @ 75Hz each</p>

NVIDIA Quadro FX 1400 PCI-Express Graphics Controller	Form Factor	<p>ATX, 4.376" x 8.5"</p> <p>Single slot</p>
	Graphics Controller	NVIDIA NV41GL
	Bus Type	PCI-Express x16, <75W power consumption
	RAMDAC	Dual 400 MHz integrated
	Memory	<p>128 MB 300 MHz DDR SDRAM unified frame buffer, Z-buffer and Texture storage</p> <p>19.2 GB/s graphics memory bandwidth</p>
	Connectors	2 DVI-I analog/digital monitor outputs, 1 3-pin Mini DIN stereo output
	Multi-monitor support	Dual integrated analog display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays.

Technical Specifications - Graphics

Additional product features	128 KB BIOS 3.3V Flash ROM reprogrammable by SW Hardware accelerated Overlay Planes Hardware accelerated two-sided lighting Hardware accelerated antialiased points and lines Quad-buffered Stereo 3D Volumetric Texture support Hardware accelerated Occlusion Culling Scalable Link Interface (SLI) technology Compliant with Microsoft/Intel PC2001 Workstation requirements Video Timings compliant with VESA DMT 1.0 and VESA GTF 1.0 specifications DDC2B+ Monitor support on all OS platforms ACPI Version 1.0b Power Management support (all modes)
Shading architecture	Fully programmable GPU (OpenGL 1.5/DirectX 9.0c class) Long fragment programs (up to 65,536 instructions) Long vertex programs (up to 65,536 instructions) Looping and subroutines (up to 256 loops per vertex program) Dynamic flow control Conditional execution Optimized compilers for Cg, OpenGL shading language, and Microsoft HLSL
Supported graphics APIs	OpenGL 1.5 ICD with immediate mode support for all OGL primitive types DirectX 9.0c
Available graphics drivers	HP-tested: Microsoft Windows XP, Windows 2000 and Linux HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/eng/software_drivers.html .
Maximum Resolution	Dual DVI-I output – drives dual digital displays at resolutions up to 1900x1200 @ 60Hz Internal 400MHz RAMDACs – drives dual analog displays up to 2048x1536 @ 85Hz each

NVIDIA Quadro NVS 440 Form Factor	ATX
256 MB Graphics Controller	Graphics Controller 2 nv43 2D graphics processor units (GPUs)
	VGA controller Integrated into the Quadro GPU
	Bus Type PCI-E x16
	RAMDAC Dual 350 MHz
	Memory 256 MB DDR frame buffer and Texture storage (128MB per GPU)
	Connector Two DMS-59
	Controller clock speed 250 MHz
	Color planes 32-bit color buffer
	Overlay planes 1 16-bit Video overlay plane
	Maximum pixel clock 350 MHz
	Multi-Monitor Support Up to 4 analog or digital monitors
	Single DVI Support Yes
	Dual DVI Support Yes

Technical Specifications - Graphics

High-definition Video Processor (HDVP)	Full-screen, full-frame video playback of HDTV and DVD content DVD-ready motion compensation for MPEG-2 Independent hardware color controls for video overlay Hardware color-space conversion (YUV 4:2:2 and 4:2:0) IDCT motion compensation 5-tap horizontal by 3-tap vertical filtering 8:1 up/down scaling
Available graphics drivers	Microsoft Windows XP (Provides full native Dual View mode, Span or Big Desktop mode, and Clone mode) HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/eng/software_drivers.html .

NVIDIA Quadro FX 3400 Graphics Card	Form Factor	ATX
	Graphics Controller	NVIDIA NV45GL
	Bus Type	PCI-Express x16
	Memory	256 MB 450 MHz GDDR3 SDRAM unified frame buffer, Z-buffer and Texture storage
	Connectors	2 DVI-I (one dual-link/one single-link) analog/digital monitor outputs, 1 3-pin Mini DIN stereo output
	Multi-monitor support	Dual integrated analog display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays or dual digital displays at 1600x1200 (single-link) and 3840x2400 (dual-link). NVIEW advanced multi-display desktop and application management seamlessly integrated into Microsoft Windows
	RAMDAC	Dual 400 MHz integrated
	Architecture features	256-bit memory interface 128-bit IEEE floating-point precision graphics pipeline 128-bit color precision 12-bit sub-pixel precision 8x FSAA at 1920x1200, 4x at 2048x1536, rotated grid FSAA sampling algorithm Hardware accelerated antialiased points and lines Hardware OpenGL overlay planes Hardware accelerated two-sided lighting Hardware accelerated clipping planes 3rd generation occlusion culling 3D volumetric texture support Quad-buffered stereo
	Shading architecture	Dual Link DVI enabling driving digital displays up to 3840x2400 (24Hz) Fully programmable GPU Long fragment programs (up to 65,536 instructions) Long vertex programs (up to 65,536 instructions) Looping and subroutines (up to 256 loops per vertex program) Dynamic flow control Conditional execution
	Supported graphics APIs	OpenGL 1.5 DirectX 9.0

Technical Specifications - Graphics

Available graphics drivers	HP-tested: Microsoft Windows® XP, Windows 2000, and Linux HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/eng/software_drivers.html .
Maximum Resolution	Dual DVI-I output – drives dual digital displays at resolutions up to 1600x1200 @ 60Hz (single-link) and 3840x2400 @ 24Hz (dual-link). Internal 400MHz RAMDACs – drives dual analog displays up to 2048x1536 @ 75Hz each

NVIDIA Quadro FX 3450 Graphics Controller	Form Factor	ATX
	Graphics Controller	NVIDIA Quadro FX 3450 Workstation GPU
	Bus Type	PCI-Express x16
	Memory	256 MB 450 MHz GDDR3 SDRAM unified graphics memory
	Connectors	2 DVI-I (one dual-link/one single-link) analog/digital monitor outputs, 1 3-pin Mini DIN stereo output, DVI-I to VGA adapters included
	Multi-Monitor Support	Dual integrated display controllers supporting up to two analog displays at 2048 x 1536 @ 75 Hz on both displays or dual digital displays at 1920 x 1200 (single-link) and 3840 x 2400 (dual-link). NVIEW advanced multi-display desktop and application management seamlessly integrated into Microsoft Windows
	Architecture Features	256-bit memory interface 128-bit IEEE floating-point color precision 12-bit sub-pixel precision 65,536 fragment instruction 65,536 vertex instruction 3D volumetric textures Single-system powerwall 12 pixels per clock rendering engine Hardware accelerated antialiased points and lines Hardware OpenGL overlay planes Hardware accelerated two-sided lighting Hardware accelerated clipping planes 3rd generation occlusion culling 16 textures per pixel in fragment programs Window ID clipping functionality Hardware accelerated line stippling OpenGL Quad-buffered stereo
	Shading Architecture	Fully programmable GPU (OpenGL 2.0/DirectX 9.0c class) Long fragment programs (up to 65,536 instructions) Long vertex programs (up to 65,536 instructions) Looping and subroutines (up to 256 loops per vertex program) Dynamic flow control Conditional execution
	High Level Shader Languages	Optimized compiler for Cg and Microsoft® HLSL OpenGL 2.0 and DirectX 9.0c support Open source compiler
	High-Resolution Antialiasing	12-bit subpixel sampling precision enhances AA quality Rotated-grid full-scene antialiasing (RG FSAA) 8x FSAA dramatically reduces visual aliasing artifacts or "jaggies" at resolution up to 1920x1200

Technical Specifications - Graphics

Display Resolution Support	Dual Link DVI- I output-drives digital displays at resolutions up to 3840 x 2400 @ 24 Hz Single Link DVI-I output drives digital displays at resolutions up to 1920 x 1200 @ 75 Hz Internal 400 MHz DACs - Two analog displays up to 2048 x 1536 @ 75 Hz each
nView Architecture	Advanced multi-display desktop & application management seamlessly integrated into Microsoft Windows.
Supported Graphics APIs	OpenGL 2.0 ICD with immediate mode support for all OGL primitive types DirectX 9.0c
Available Graphics Drivers	Microsoft Windows XP, Linux - Full Open GL implementation, complete with NVIDIA and ARB extensions. HP qualified drivers may be preloaded or available from the HP support web site: http://welcome.hp.com/country/us/eng/software_drivers.html .

ATI FireGL V5100 PCI-Express Graphics Controller	Form Factor	ATX
	Graphics Controller	RV423
	Bus Type	PCI-Express x16
	Memory	128 MB 350MHz DDR unified frame buffer, Z-buffer and Texture storage
	Connectors	2 DVI-I analog/digital monitor outputs, 1 3-pin Mini DIN stereo output
	Multi-monitor support	Dual integrated display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays.
	RAMDAC	Dual 400 MHz integrated
	Architecture features	256-bit memory interface 128-bit IEEE floating-point precision 24-bits per RGBA color precision 8-bit sub-pixel precision 6 parallel geometry engines 12 parallel pixel pipelines 2x/4x/6x FSAA Hardware accelerated antialiased points and lines Hardware OpenGL overlay planes Hardware accelerated two-sided lighting Hardware accelerated clipping planes Hardware accelerated occlusion culling Hardware accelerated clip planes Quad-buffered stereo
	Shading architecture	Smartshader™ technology Programmable pixel and vertex shaders 16 textures per pass Pixel shaders up to 160 instructions with 32-bit floating point precision for each RGBA component Multiple render target support Shadow volume rendering acceleration High precision 10-bit per channel frame buffer support
	Supported graphics APIs	OpenGL 1.5 DirectX 9.0

Technical Specifications - Graphics

- Available graphics drivers** HP-tested: Microsoft Windows XP, Windows 2000, and Linux
HP qualified drivers may be preloaded or available from the HP support
Web site: http://welcome.hp.com/country/us/eng/software_drivers.html.
- Maximum Resolution** DVI-I output – drives digital displays at resolutions up to 1600x1200
Internal 400MHz RAMDAC – drives dual analog displays up to 2048x1536
@ 85Hz each

Technical Specifications - Monitors

HP L1755 Flat Panel Monitor	Panel	Type	Active matrix, thin film transistor (TFT)	
		Viewable Image Area (diagonal)	17 in (43.2 cm) maximum viewable	
		Screen Opening (WxH)	13.4 x 10.7 in (33.9 x 27.2 cm)	
		Viewing Angle (typical)	176 degrees horizontal/176 degrees vertical (10:1 minimum contrast ratio)	
		Brightness (typical)	Up to 250 nits (cd/m ²)	
		Contrast Ratio (typical)	Up to 1000:1 (typical)	
		Response Rate (typical)	25 ms (typical rise + fall)	
		Pixel Pitch	0.264 mm	
		Color Depth Support	16.7 million colors	
		Plug and Play	Yes (supports VESA DDC2B; PC2001 compliant)	
Video/Other Inputs		Self Powered USB 2.0 Hub	One upstream, four downstream ports (cable included)	
		Input Signal	Two connectors: one 15-pin mini D-sub analog VGA; and one DVI-I (VGA analog or digital)	
		Input Impedance	75 ohms ± 2%	
		Sync Input	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green (activated through on-screen display)	
		Video Cable	VGA to VGA, DVI-D to DVI-D, and DVI-I to VGA	
		Video Cable Length	78 in (2.0 m)	
	Signal Interface/ Performance		Horizontal Frequency	30 to 82 kHz
			Vertical Frequency	56 to 75 Hz
			Native Resolution	1280 x 1024 @ 60 Hz analog 1280 x 1024 @ 60 Hz digital
			Maximum Resolution (Analog)	1280 x 1024 @ 75 Hz analog
		Maximum Resolution (Digital)	1280 x 1024 @ 75 Hz digital	
		Preset VESA Graphic Modes (non-interlaced)	640 x 480 @ 60 Hz, 72 Hz, 75 Hz 720 x 400 @ 70 Hz 800 x 600 @ 60 Hz, 72 Hz, 75 Hz 1024 x 768 @ 60 Hz, 70 Hz, 75 Hz 1280 x 1024 @ 60 Hz, 75 Hz	
		Preset MAC Mode	832 x 624 @ 75 Hz 1152 x 870 @ 75 Hz	
		Preset VGA Mode	640 x 480 @ 60 Hz, 72 Hz	
		Preset SUN Mode	1152 x 900 @ 76 Hz	
		Fail Safe Mode	Yes (limits out of range signal messages)	
	Maximum Pixel Clock Speed	140 MHz		
	User Programmable Modes	Yes, 15		
	Anti-Glare	Yes		

Technical Specifications - Monitors

	Anti-Static	Yes	
	AssetControl	Yes (accessible on HP Compaq Business Desktops featuring Intelligent Manageability)	
	Default Color Temperature	Yes (6500k, 9300k, SRGB, Custom User)	
On Screen Display (OSD) Controls	Buttons or Switches	Power on/off; 3-button OSD; second level OSD buttons include dual-input switch, dedicated auto adjust switch	
	Languages	English, Spanish, French, German, Italian, Japanese, Simplified Chinese	
	User Controls	Size and positioning, contrast, brightness, clock, clock phase, selectable color temperature, serial number, mode displayed, sleep timer, input selection, factory reset, individual color contrast, full-screen resolution	
Power	Power Supply	Auto-ranging, 90 to 265 VAC; internal power supply	
	Input Power	100 ~ 240 VAC	
	Nominal Current	1.5 A maximum	
	Frequency	50 ~ 60 Hz	
	Average	33 watts when displaying standard office software	
	Typical Power Consumption	< 40 watts	
	Maximum	< 60 watts	
	Power Saving Off Mode	< 2 W	
		0 watts (when master power switch is in the off position)	
		Power Cable Length	70 in (1.8 m); non-captive
Mechanical	Dimensions (H x W x D)	Unpacked with stand	16.1 (minimum) to 21.2 (maximum) x 14.4 x 8.3 in (40.9 (minimum) to 42.2 (maximum) x 36.5 x 21.1 cm)
		Base Area	8.3 x 12.2 in (21.1 x 30.9 cm)
		Panel only (without stand) (H x W x D)	11.8 x 14.4 x 2.9 in (30.1 x 40.9 x 7.3 cm)
	Weight	Unpacked with stand	14.7 lb (6.7 kg)
		Unpacked without stand	8.1 lb (3.7 kg)
		Packaged	20.2 lb (9.2 kg)
	Bezel Width	13 mm left and right, 14 mm top, and 15 mm bottom	
	Tilt Range	-5° to +35°	
	Swivel Range	± 50° horizontal swivel	
	Height Adjustable	Yes (5.1 in/13 cm adjustment range)	

Technical Specifications - Monitors

	Pivot Rotation	Yes, 90 °
	Base	Ships detached and is removable after installation
Environmental	Temperature – Operating	41° to 95° F (5° to 35° C)
	Temperature – Non-operating	-4° to 140° F (-20° to 60° C)
	Humidity – Operating	20% to 80%
	Humidity – Non-operating	5% to 95%
	Altitude – Operating	0 to 13,000 ft (0 to 4,000 m)
	Altitude – Non-operating	0 to 40,000 ft (0 to 12,192 m)
Options	HP Desktop Access Center – Part number: DK985A	Features integrated microphone/headset jacks, dual function headset for phone/PC support, a MultiBay slot for adding an optical drive (sold separately), and four USB ports for easy integration of third-party digital solutions. Sold separately. For more information, refer to the HP Desktop Access Center QuickSpec document.
	HP Flat Panel Speaker Bar – Part number: PF804AA	Powered directly by the monitor, seamlessly attaches to the monitor's bezel to bring full multimedia support to select HP flat panel monitors. Features dual speakers with full sound range and external jack for headphones. Sold separately. For more information, refer to the HP Flat Panel Speaker Bar QuickSpec document.
	HP Compaq 7000 Series Ultra-slim Desktop Integrated Work Center Stand – Part number: DL641B	Allows mounting of a 15-, 17- or 19-inch HP flat panel monitor and an HP Compaq dc7100 Ultra-slim Desktop PC on a single stand for the convenience of an "all-in-one" form factor. Sold separately. For more information, refer to this product's QuickSpec document
Other	Accessories Included	VGA to VGA cable, DVI-D to DVI-D cable, DVI-I to VGA cable, USB cable, user CD-ROM with Pivot Pro software
	Software	Pivot Pro software from Portrait Displays, Inc. interacts with your PC's native graphics driver to enable seamless portrait screen redraws with a simple mouse-click or keyboard command. Pivot Pro supports 90-degree portrait and landscape views. Language support is available in English, Japanese, French, German, Spanish, Italian, and Traditional and Simplified Chinese.
	Software	HP Display LiteSaver feature lets you schedule Sleep mode at preset times to help protect the display against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor.

Technical Specifications - Monitors

	User Guide Languages	English, Latin America Spanish, Brazilian Portuguese, Danish, Dutch, Finnish, French, German, Italian, Norwegian, Swedish, Greek, Polish, Russian, Slovenian, Turkish, Simplified Chinese, Traditional Chinese, Korean, and Japanese
	Warranty Languages	English, Canadian French, Latin America Spanish, Brazilian Portuguese, Danish, Dutch, Finnish, French, German, Italian, Norwegian, Spanish, Swedish, Bahasa Indonesian, Simplified Chinese, Traditional Chinese, and Korean
	Color	Carbonite, two-tone carbonite and silver (EMEA only)
	VESA Mounting	Yes (swing arm/wall mount not included); base must be removed for mounting options)
	VESA External Mounting	Yes (standard 4 hole pattern, 100 mm)
	Kensington Lock-ready	Yes
Certification and Compliance		Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCC Approval, CISPR Requirements, Eastern European Approvals, Energy Star Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 13406-2 Compliant (Pixel Defect Guidelines), Mexican NOM Approval, MPR-II Compliant, PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 99 or 03 depending on region (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Microsoft Windows Certification
Compatibility		VESA Video Signal Standard (VSI) Compliant video cards have been tested and proven compatible for use with the HP L1755 Flat Panel Monitor. Recommended for use with HP products.
Service and Warranty		Limited three-year parts and repair labor, service provider labor, and on-site service. Next business day advanced exchange direct replacement service available during warranty period. Certain restrictions and exclusions apply. For details, contact HP Customer Support.

HP L1955 Flat Panel Monitor	Panel	Type	Active matrix, thin film transistor (TFT)
		Viewable Image Area (diagonal)	19 in (48.25 cm) maximum viewable
		Screen Opening (WxH)	14.9 x 12.0 in (38.0 x 30.5 cm)
		Viewing Angle (typical)	176 degrees horizontal/176 degrees vertical (10:1 minimum contrast ratio)
		Brightness (typical)	Up to 250 nits (cd/m ²)
		Contrast Ratio (typical)	Up to 1000:1 (typical)
		Response Rate (typical)	<16 ms (typical rise + fall)
		Pixel Pitch	0.294 mm
		Color Depth Support	16.7 million colors

Technical Specifications - Monitors

Video/Other Inputs	Plug and Play	Yes (supports VESA DDC2B; PC2001 compliant)	
	Self Powered USB 2.0 Hub	One upstream, four downstream ports (cable included)	
	Input Signal	Two connectors: one 15-pin mini D-sub analog VGA; and one DVI-I (VGA analog or digital)	
	Input Impedance	75 ohms \pm 2%	
	Sync Input	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green (activated through on-screen display)	
	Video Cable	VGA to VGA, DVI-D to DVI-D, and DVI-I to VGA	
	Video Cable Length	78 in (2.0 m)	
	Signal Interface/ Performance	Horizontal Frequency	30 to 82 kHz
		Vertical Frequency	56 to 75 Hz
		Native Resolution	1280 x 1024 @ 75 Hz analog 1280 x 1024 @ 60 Hz digital
		Maximum Resolution (Analog)	1280 x 1024 @ 75 Hz analog
		Maximum Resolution (Digital)	1280 x 1024 @ 75 Hz digital
		Preset VESA Graphic Modes (non-interlaced)	640 x 480 @ 60 Hz, 72 Hz, 75 Hz
			720 x 400 @ 70 Hz
			800 x 600 @ 60 Hz, 72 Hz, 75 Hz
1024 x 768 @ 60 Hz, 70 Hz, 75 Hz			
1280 x 1024 @ 60 Hz, 75 Hz			
Preset MAC Mode		832 x 624 @ 75 Hz	
		1152 x 870 @ 75 Hz	
Preset VGA Mode		640 x 480 @ 60 Hz, 72 Hz	
Preset SUN Mode		1152 x 900 @ 76 Hz	
Fail Safe Mode		Yes (limits out of range signal messages)	
Maximum Pixel Clock Speed	140 MHz		
User Programmable Modes	Yes, 15		
Anti-Glare	Yes		
Anti-Static	Yes		
AssetControl	Yes (accessible on HP Compaq Business Desktops featuring Intelligent Manageability)		
Default Color Temperature	Yes (6500k, 9300k, SRGB, Custom User)		
On Screen Display (OSD) Controls	Buttons or Switches	Power on/off; 3-button OSD; second level OSD buttons include dual-input switch, dedicated auto adjust switch	
	Languages	English, Spanish, French, German, Italian, Japanese, Simplified Chinese	
	User Controls	Size and Positioning Contrast	

		Brightness	
		Clock, Clock Phase	
		Selectable Color Temperature	
		Serial Number	
		Mode Displayed	
		Sleep Timer	
		Input Selection	
		Factory Reset	
		Individual Color Contrast	
		Full-screen Resolution	
Power	Power Supply	Auto-ranging, 90 to 265 VAC; internal power supply	
	Input Power	100 ~ 240 VAC	
	Nominal Current	1.5 A maximum	
	Frequency	50 ~ 60 Hz	
	Average	33 watts when displaying standard office software	
	Typical Power Consumption	< 40 watts	
	Maximum	< 60 watts	
	Power Saving Off Mode	< 2 watts	
		0 watts (when master power switch is in the off position)	
	Power Cable Length	70 in (1.8 m); non-captive	
Mechanical	Dimensions (H x W x D)	Unpacked with stand	16.8 (minimum) to 22.3 (maximum) x 15.9 x 8.3 in (42.7 (minimum) to 56.6 (maximum) x 40.4 x 21.1 cm)
		Base Area (Footprint D x W)	8.3 x 12.2 in (21.1 x 30.9 cm)
		Panel only (without stand) (H x W x D)	13.2 x 15.9 x 3.1 in (33.5 x 40.4 x 7.9 cm)
	Weight	Unpacked with stand	16.5 lb (7.5 kg)
		Unpacked without stand	10.5 lb (4.75 kg)
		Packaged	23.5 lb (10.7 kg)
	Bezel Width	13 mm left and right, 14 mm top, and 15 mm bottom	
	Tilt Range	-5° to +35°	
	Swivel Range	± 50° horizontal swivel	
	Height Adjustable	Yes (5.1 in/13 cm adjustment range)	
	Pivot Rotation	Yes, 90 °	
	Base	Ships detached and is removable after installation	

Technical Specifications - Monitors

Environmental	Temperature – Operating	41° to 95° F (5° to 35° C)
	Temperature – Non-operating	-4° to 140° F (-20° to 60° C)
	Humidity – Operating	20% to 80%
	Humidity – Non-operating	5% to 95%
	Altitude – Operating	0 to 13,000 ft (0 to 4,000 m)
	Altitude – Non-operating	0 to 40,000 ft (0 to 12,192 m)
Options	Desktop Access Center	Features integrated microphone/headset jacks, dual function headset for phone/PC support, a MultiBay slot for adding an optical drive (sold separately), and four USB ports for easy integration of third-party digital solutions. Sold separately; part number DK985A. For more information, refer to the HP Desktop Access Center QuickSpecs.
	HP Flat Panel Speaker Bar	Powered directly by the monitor, seamlessly attaches to the monitor's bezel to bring full multimedia support to select HP flat panel monitors. Features dual speakers with full sound range and external jack for headphones. Sold separately, part number PF804AA. For more information, refer to the HP Flat Panel Speaker Bar QuickSpecs.
Other	Accessories Included	VGA to VGA cable, DVI-D to DVI-D cable, DVI-I to VGA cable, USB cable, user CD-ROM with Pivot Pro software
	Software	Pivot Pro software from Portrait Displays, Inc. interacts with your PC's native graphics driver to enable seamless portrait screen redraws with a simple mouse-click or keyboard command. Pivot Pro supports 90-degree portrait and landscape views. Language support is available in English, Japanese, French, German, Spanish, Italian, and Traditional and Simplified Chinese.
	Software	HP Display LiteSaver feature lets you schedule Sleep mode at preset times to help protect the display against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor.
	User Guide Languages	English
	Warranty Languages	English
	Color	Carbonite, two-tone carbonite and silver (EMEA only)
	VESA Mounting	Yes (swing arm/wall mount not included); base must be removed for mounting options)
	VESA External Mounting	Yes (standard 4 hole pattern, 100 mm)
	Kensington Lock-ready	Yes

Technical Specifications - Monitors

Certification and Compliance	Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCIB/CCEE Approval, CISPR Requirements, Eastern European Approvals, Energy Star Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 13406-2 Compliant (Pixel Defect Guidelines), Mexican NOM Approval, MPR-II Compliant, PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 99 or 03 depending on region (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Microsoft® Windows® Certification
Compatibility	VESA Video Signal Standard (VSI) Compliant video cards have been tested and proven compatible for use with the HP L1955 Flat Panel Monitor. Recommended for use with HP products.
Service and Warranty	Limited three-year parts and repair labor, service provider labor, and on-site service. Next Business Day advanced exchange direct replacement service available during warranty period. Certain restrictions and exclusions apply. For details, contact HP Customer Support.

HP Flat Panel Monitor L2035	Panel	Type	20-inch Active Matrix TFT (thin film transistor)
		Viewable Image Area (diagonal)	20.1 in (51 cm)
		Screen Opening (W x H)	16.2 x 12.17 in (41.1 x 30.9 cm)
		Viewing Angle (typical)*	Up to 170° H/170° V (10:1 minimum contrast ratio)
		Brightness (typical*)	Up to 250 nits (cd/m ²)
		Contrast Ratio (typical)*	Up to 400:1
		Response Rate (typical)*	16 ms (typical, rise + fall)
		Pixel Pitch	0.255 mm
		Color Depth Support	16.7 million colors
On Screen Display (OSD) Controls	Buttons or Switches	PiP (Picture in Picture), Input select, auto adjust, OSD up, OSD down, OSD menu select, power	
	Languages	English, French, German, Spanish, Italian	
	User Controls	Brightness, contrast, positioning, color temperature, individual color control, serial number display, full screen resolutions, clock, clock phase, video picture-in-picture (size and position), input selection (includes separate direct access key for dedicated swap between inputs 1 and 2), factory reset	

Technical Specifications - Monitors

Signal Interface/ Performance	Horizontal Frequency	30 to 94 kHz (VGA input); 30 to 92 KHz (DVI input) (for modes with pixel clock less than 157 MHz)	
	Vertical Frequency	48 to 85 Hz (VGA input); 30 to 92 KHz (DVI input) (for modes with pixel clock less than 157 MHz)	
	Graphics Controller	Pixelworks PW171	
	Native Resolution	1600 x 1200 @ 60 Hz (recommended)	
	Preset VESA Graphic Modes (non-interlaced)	1600 x 1200 @ 60 Hz, 75 Hz (VGA input)	
		1280 x 1024 @ 60 Hz, 75 Hz, 85 Hz	
		1280 x 960 @ 60 Hz	
		1152 x 900 @ 66 Hz	
		1024 x 768 @ 60 Hz, 75 Hz, 85 Hz	
		800 x 600 @ 60 Hz, 85 Hz	
		640 x 480 @ 60 Hz, 75 Hz, 85 Hz	
		Text Mode	720 x 400 @ 70 Hz
		Mac Mode	1152 x 870 @ 75 Hz and 832 x 624 @ 75 Hz
		Sun Mode	1152 x 900 @ 66 Hz
	Maximum Pixel Clock Speed	202 MHz (VGA input); 162 MHz (DVI input)	
	User Programmable Modes	Yes, 10	
	Anti-Glare	Yes	
	Anti-Static	Yes	
	Default Color Temperature	6500 K	
	Video Input	Plug and Play	Yes
Input Signal		Four connectors, including one 15-pin mini D-sub VGA, one DVI-I (VGA analog and digital input), one composite video, and one s-video	
Input Impedance		75 ohms \pm 10%	
Sync Input		Separate sync (HSYNC/VSYNC); composite sync, Sync on Green	
Video Cable		VGA to VGA; VGA to DVI-I; DVI-D to DVI-I	
Power	Video Cable Length	5.9 ft (1.8 m)	
	Input Power	Auto-Ranging, 90 to 132 VAC and 195 to 265 VAC; internal power supply, 50 Hz/60 Hz	
	Frequency	47.5 to 63 Hz	
	Maximum	< 75 W	
	Power Saving	< 5 W	
	Power Cable Length	5.9 ft (1.8 m)	

Technical Specifications - Monitors

Mechanical	Dimensions (H x W x D)	Unpacked with stand	17.36 to 20.9 x 17.8 x 8.27 in (44.1 to 53.1 x 45.2 x 21.0 cm)
		Unpacked without stand (head only)	14.29 x 17.8 x 3.19 in (36.3 x 45.2 x 8.1 cm)
		Packaged	11.5 x 21.9 x 23.9 in (29.2 x 55.6 x 60.6 cm)
	Weight	Unpacked	With stand: 20.28 lb (9.2 kg); Without stand: 12.35 lb (5.6 kg)
			Packaged
		Tilt Range	-5° to + 25° vertical
		Swivel Range	-35° to + 35°
	Environmental	Height Adjustable	Yes, range 3.54 in (9.0 cm)
		Pivot Rotation	Yes
		Base	Attached
Temperature – Operating		46° to 95° F (10° to 35° C)	
Temperature – Non-operating		6° to 140° F (-10° to 60° C)	
Humidity – Operating		20% to 80% non-condensing	
Humidity – Non-operating		5% to 85%	
Altitude – Operating		+ 12,000 ft (+3,657.6 m)	
Altitude – Non-operating	+ 40,000 ft (+12,192 m)		
Options	HP Desktop Access Center	Sold separately, the HP Desktop Access Center features integrated microphone/headset jacks, dual function headset for phone/PC support, a MultiBay slot for adding an optical drive (sold separately), and four USB ports for easy integration of third-party digital solutions; part number DK985A. For more information, refer to the HP Desktop Access Center QuickSpecs.	

Technical Specifications - Monitors

Other	Accessories Included	VGA to VGA cable – connects the graphic card's VGA analog connector to the monitor's input #1 (VGA analog) connector VGA to DVI-I cable – connects the graphic card's VGA connector to the monitor's input #2 (DVI-I analog) connector DVI-D to DVI-I cable – connects the graphic card's DVI-D digital connector to the monitor's input #2 (DVI-I digital) connector
	User Guide Languages	English, B. Portuguese, French, LA Spanish, Korean, S. Chinese, T. Chinese, Bahasa, Japanese, Danish, Finnish, German, Norwegian, Spanish, Swedish, Greek, Polish, Russian, Slovenian, Turkish
	Warranty Languages	English, Canadian French, LA Spanish, Brazilian Portuguese, Danish, German, Castilian Spanish, French, Italian, Dutch, Norwegian, Finnish, Swedish, Bahasa Indonesian, Korean, T. Chinese, S. Chinese
	Color	Carbonite/Silver
	VESA External Mounting	Yes (Standard 4 hole pattern, 100 mm)
	Kensington Lock-Ready	Yes
Certification and Compliance		Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCIB/CCEE Approval, CISPR Requirements, Eastern European Approvals, *Energy Star Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 9241-3,7,8 VDT Guidelines, ISO 13406-2 Pixel Defect Guidelines, Mexican NOM Approval, MIC Requirements (New Zealand), MPR-II Compliant, Nordic Approvals (Nemko, Fimko, Demko, Semko), PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 03 (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Windows Certification (Microsoft® Windows® 98, Microsoft Windows 2000, and Microsoft Windows XP) * Energy Star Compliant available summer 2004.
Compatibility		Compatible with platforms using the VESA standard video modes and HP Compaq Business Desktops d500, d300, and d200 Series, Compaq Evo Desktops, and HP Workstations
Service and Warranty		Limited three years parts, labor, and on-site service, including backlight. Availability varies by region. Certain restrictions and exclusions apply. Consult HP Customer Service for details.

HP Flat Panel Monitor LP2065	Panel	Type	20-inch Active Matrix TFT (thin film transistor)
		Viewable Image Area	20.1 in (51 cm) (diagonal)
		Screen Opening	16.2 x 12.17 in (41.1 x 30.9 cm) (W x H)
		Viewing Angle (typical)*	Up to 178° horizontal/178° vertical (10:1 minimum contrast ratio)
		Brightness (typical)*	Up to 300 nits (cd/m2)
		Contrast Ratio (typical)*	Up to 800:1

Technical Specifications - Monitors

	Response Rate (typical)*	8 ms (gray to gray), 16 ms (rise + fall)
	Pixel Pitch	0.255 mm
	Color Depth Support	16.7 million colors
	Backlight Lamp Life (to half brightness)	45K hours
On Screen Display (OSD) Controls	Buttons or Switches	Input select, auto adjust/OSD up, OSD down, OSD menu select, power
	Languages	English, French, German, Spanish, Italian, Dutch, and Japanese
	User Controls	Brightness, contrast, positioning, color temperature, individual color control, serial number display, full screen resolutions, clock, clock phase, input selection, image control (including scaling), and factory reset
Signal Interface/ Performance	Horizontal Frequency	30 to 94 kHz (VGA input); 30 to 92 KHz (DVI input for modes with pixel clock less than 157 MHz)
	Vertical Frequency	48 to 85 Hz (VGA input); 30 to 92 KHz (DVI input for modes with pixel clock less than 157 MHz)
	Native Resolution	1600 x 1200 @ 60 Hz (recommended)
	Preset VESA Graphic Modes (non-interlaced)	1600 x 1200 @ 60 Hz, 75 Hz (VGA input) 1280 x 1024 @ 60 Hz, 75 Hz, 85 Hz 1280 x 960 @ 60 Hz 1152 x 900 @ 66 Hz 1024 x 768 @ 60 Hz, 75 Hz, 85 Hz 800 x 600 @ 60 Hz, 85 Hz 640 x 480 @ 60 Hz, 75 Hz, 85 Hz
	Text Mode	720 x 400 @ 70 Hz
	Mac Mode	1152 x 870 @ 75 Hz and 832 x 624 @ 75 Hz
	Sun Mode	1152 x 900 @ 66 Hz
	Maximum Pixel Clock Speed	202 MHz (VGA input); 162 MHz (DVI input)
	User Programmable Modes	Yes, 10
	Anti-Glare	Yes
	Anti-Static	Yes
	Default Color Temperature	6500 K

Technical Specifications - Monitors

Video Input	Plug and Play	Yes		
	Input Signal	Four connectors, including one 15-pin mini D-sub VGA, one DVI-I (VGA analog and digital input), one composite video, and one s-video		
	Self Powered USB 2.0 Hub	One upstream, four downstream ports (cable included)		
	Input Signal	Two DVI-I connectors (dual VGA analog or dual digital input possible)		
	Input Impedance	75 ohms \pm 10%		
	Sync Input	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green		
	Video Cable	Two VGA to DVI-I; two DVI-D to DVI-I		
	Video Cable Length	5.9 ft (1.8 m)		
	Power	Input Power	Auto-Ranging, 90 to 132 VAC and 195 to 265 VAC; internal power supply, 50 Hz/60 Hz	
		Frequency	47.5 to 63 Hz	
Typical Power Consumption		55 watts (without USB ports); 70 watts (USB ports fully loaded)		
Maximum		< 75 W		
Power Saving		< 2 watts		
Power Cable Length		5.9 ft (1.8 m)		
Mechanical		Dimensions (H x W x D)	Unpacked with stand	16.7 to 21.8 x 17.4 x 8.67 in (42.5 to 55.5 x 44.3 x 22.0 cm)
	Unpacked w/o stand (head only)		13.58 x 17.4 x 3.42 in (34.5 x 44.3 x 8.7 cm)	
	Packaged		11.77 x 22.2 x 16.77 in (29.9 x 56.4 x 42.6 cm)	
	Weight	Unpacked	With stand: 20.28 lb (9.2 kg); Without stand: 12.35 lb (5.6 kg)	
		Packaged	26.3 lb (11.95 kg)	
	Tilt Range	-5° to + 25° vertical tilt		
	Swivel Range	-45° to + 45°		
	Height Adjustable	Yes, range 5.1 in (13.0 cm)		
	Pivot Rotation	Yes		
	Base	Detachable, ships attached		

Technical Specifications - Monitors

Environmental	Temperature – Operating	46° to 95° F (10° to 35° C)
	Temperature – Non-operating	6° to 140° F (-10° to 60° C)
	Humidity – Operating	20% to 80% non-condensing
	Humidity – Non-operating	5% to 85%
	Altitude – Operating	+12,000 ft (+3,657.6 m)
	Altitude – Non-operating	+40,000 ft (+12,192 m)
Options	HP Silver Flat Panel Speaker Bar - Part number: EE418AA	Powered directly by the monitor or the PC, the Speaker Bar seamlessly attaches to the monitor's lower bezel to bring full audio support to select HP flat panel monitors. Features include dual speakers with full sound range and external jack for headphones. Sold separately. For more information, refer to the HP Silver Flat Panel Speaker Bar QuickSpec.
Other	Accessories Included	VGA to DVI-I cable – connects the graphic card's VGA connector to the monitor's input #1 or 2 (DVI-I analog) connector.
		DVI-D to DVI-I cable – connects the graphic card's DVI-D digital connector to the monitor's input #1 or #2 (DVI-I digital) connector.
	User Guide Languages	English, B. Portuguese, French, LA Spanish, Korean, S. Chinese, T. Chinese, Bahasa, Japanese, Danish, Finnish, German, Norwegian, Spanish, Swedish, Greek, Polish, Russian, Slovenian, Turkish
	Software	HP Display Assistant Utility makes it possible to adjust displays settings through the PC using two-way communication via DDCI.
		HP Display Lite Saver allows ability to power up and down display at predetermined hours of the day to save power and backlight life.
		Pivot Pro software from Portrait Displays, Inc. interacts with your PC's native graphics driver to enable seamless portrait screen redraws with a simple mouse-click or keyboard command. Pivot Pro supports 90-degree portrait and landscape views. Language support is available in English, Japanese, French, German, Spanish, Italian, and Traditional and Simplified Chinese.
	User Guide Languages	English
Warranty Languages	English	
Color	Carbonite/Silver	
VESA External Mounting	Yes (Standard 4 hole pattern, 100 mm)	
Kensington Lock-Ready	Yes	

Technical Specifications - Monitors

Certification and Compliance	Canadian Requirements/CSA, CE Marking, CISPR Requirements, , Energy Star Compliant, FCC Approval, ISO 13406-2 Pixel Defect Guidelines, Mexican NOM Approval,, MPR-II Compliant, PC2001 Compliant, PC99 Certified, TCO 03 (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Microsoft Windows Certification (Microsoft Windows 98, Microsoft Windows 2000, and Microsoft Windows XP)
Compatibility	Compatible with platforms using the VESA standard video modes. Recommended for use with HP products.
Service and Warranty	Three years parts, labor, and on-site service. 24-hour 365-day 1-800 technical support. Replacement options include 2nd business day on-site service or next business day direct replacement. With direct replacement, HP will ship a replacement display product directly to you. Using the shipping labels provided, return your failed display to HP. Certain restrictions and exclusions apply. For details, contact HP Customer Support.

HP Flat Panel Monitor L2335	Panel	Type	23-inch Active Matrix TFT (thin film transistor)
		Viewable Image Area (diagonal)	23 in (58.4 cm)
		Screen Opening (W x H)	19.53 x 12.24 in (49.6 x 31.1 cm)
		Viewing Angle (typical)*	Up to 170° H/170° V (10:1 minimum contrast ratio)
		Brightness (typical)*	Up to 250 nits (cd/m ²)
		Contrast Ratio (typical)*	Up to 500:1
		Response Rate (typical)*	16 ms (typical, rise + fall)
		Pixel Pitch	0.258 mm
		Color Depth Support	16.7 million colors
		* All specifications are provided by the component manufacturers. Performance specifications represent the highest specification of all HP's component manufacturers' typical level specifications for performance. Actual performance may vary either higher or lower.	
On Screen Display (OSD) Controls	Buttons or Switches	PiP (Picture in Picture), Input Select, Auto Adjust, OSD Up, OSD Down, OSD Menu Select, Power	
	Languages	English, French, German, Spanish, Italian	
	User Controls	Brightness, contrast, positioning, color temperature, individual color control, serial number display, full screen resolutions, clock, clock phase, video picture-in-picture (size and position), input selection (includes separate direct access key for dedicated swap between inputs 1 and 2), factory reset	

Technical Specifications - Monitors

Signal Interface/ Performance	Horizontal Frequency	30 to 94 kHz (VGA input); 30 to 92 KHz (DVI input) (for modes with pixel clock less than 157 MHz)	
	Vertical Frequency	48 to 85 Hz (VGA and DVI input)	
	Graphics Controller	Pixelworks PW172	
	Native Resolution	1920 x 1200 @ 60 Hz (recommended)	
	Preset VESA Graphic Modes (non-interlaced)		1920 x 1200 @ 60Hz
			1600 x 1200 @ 60 Hz, 75 Hz
			1280 x 1024 @ 60 Hz, 75Hz, 85 Hz
			1280 x 960 @ 60 Hz
			1152 x 900 @ 66 Hz
			1024 x 768 @ 60 Hz, 75 Hz, 85 Hz
			800 x 600 @ 60 Hz, 75Hz
			640 x 480 @ 60 Hz, 75 Hz
		Text Mode	720 x 400 @ 70 Hz
		Mac Mode	1152 x 870 @ 75 Hz and 832 x 624 @ 75 Hz
	Sun Mode	1152 x 900 @ 66 Hz	
	Maximum Pixel Clock Speed	202 MHz (VGA input); 162 MHz (DVI input)	
	User Programmable Modes	Yes, 10	
	Anti-Glare	Yes	
	Anti-Static	Yes	
	Default Color Temperature	6500 K	
Video Input	Plug and Play	Yes	
	Input Signal	Five connectors, including one 15-pin mini D-sub VGA, one DVI-I (VGA analog and digital input), one composite video, one s-video, component video	
	Input Impedance	75 ohms \pm 10%	
	Sync Input	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green	
	Video Cable	VGA to VGA; VGA to DVI-I; DVI-D to DVI-I	
Power	Video Cable Length	5.9 ft (1.8 m)	
	Input Power	Auto-Ranging, 90 to 132 VAC and 195 to 265 VAC; internal power supply, 50 Hz/60 Hz	
	Frequency	47.5 to 63 Hz	
	Maximum	< 100 W	
	Power Saving	< 5 W	
	Power Cable Length	5.9 ft (1.8 m)	

Technical Specifications - Monitors

Mechanical	Dimensions (H x W x D)	Unpacked	17.36 (min) to 20.9 (max) x 21.46 x 8.27 in (44.1 (min) to 53.1 (max) x 54.5 x 21.0 cm)
		Unpacked without stand (head only)	14.57 x 21.46 x 3.35 in (37.0 x 54.5 x 8.5 cm)
		Packaged	11.5 x 25.75 x 23.86 in (29.2 x 65.4 x 60.6 cm)
	Weight	Unpacked	22.27 lb (10.1 kg)
		Packaged	30.87 lb (14.0 kg)
		Tilt Range	-5° to + 25° vertical
		Swivel Range	-35° to + 35°
	Environmental	Height Adjustable	Yes, range 3.54 in (9.0 cm)
		Pivot Rotation	Yes
		Base	Attached
Temperature – Operating		46° to 95° F (10° to 35° C)	
Temperature – Non-operating		6° to 140° F (-10° to 60° C)	
Humidity – Operating		20% to 80% non-condensing	
Humidity – Non-operating		5% to 85%	
Altitude – Operating		+ 12,000 ft (+3,657.6 m)	
Altitude – Non-operating		+ 40,000 ft (+12,192 m)	
Options		HP Desktop Access Center	Sold separately, the HP Desktop Access Center Features integrated microphone/headset jacks, dual function headset for phone/PC support, a MultiBay slot for adding an optical drive (sold separately), and four USB ports for easy integration of third-party digital solutions; part number DK985A. For more information, refer to the HP Desktop Access Center QuickSpecs.

Technical Specifications - Monitors

Other	Accessories Included	<p>VGA to VGA cable – connects the graphic card's VGA analog connector to the monitor's input #1 (VGA analog) connector</p> <p>VGA to DVI-I cable – connects the graphic card's VGA connector to the monitor's input #2 (DVI-I analog) connector</p> <p>DVI-D to DVI-I cable – connects the graphic card's DVI-D digital connector to the monitor's input #2 (DVI-I digital) connector</p>
	User Guide Languages	English, B. Portuguese, French, LA Spanish, Korean, S. Chinese, T. Chinese, Bahasa, Japanese, Danish, Finnish, German, Norwegian, Spanish, Swedish, Greek, Polish, Russian, Slovenian, Turkish
	Warranty Languages	English, Canadian French, LA Spanish, Brazilian Portuguese, Danish, German, Castilian Spanish, French, Italian, Dutch, Norwegian, Finnish, Swedish, Bahasa Indonesian, Korean, T. Chinese, S. Chinese
	Color	Carbonite/silver
	VESA External Mounting	Yes (Standard 4 hole pattern, 100 mm)
	Kensington Lock-Ready	Yes
Certification and Compliance		<p>Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCIB/CCEE Approval, CISPR Requirements, Eastern European Approvals, *Energy Star Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 9241-3,7,8 VDT Guidelines, ISO 13406-2 Pixel Defect Guidelines, Mexican NOM Approval, MIC Requirements (New Zealand), MPR-II Compliant, Nordic Approvals (Nemko, Fimko, Demko, Semko), PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 03 (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Windows Certification (Microsoft® Windows® 98, Microsoft Windows 2000, and Microsoft Windows XP).</p> <p>* Energy Star Compliant available summer 2004.</p>
Compatibility		Compatible with platforms using the VESA standard video modes and HP Compaq Business Desktops d500, d300, and d200 Series, Compaq Evo Desktops, and HP Business Desktops d300 series.
Service and Warranty		Limited three years parts, labor, and on-site service, including backlight. Availability varies by region. Certain restrictions and exclusions apply. Consult HP Customer Service for details.

HP Flat Panel Monitor LP2465	Panel	Type	24-inch Active Matrix TFT (thin film transistor)
		Viewable Image Area	24 in (60.96 cm) (diagonal)
		Screen Opening	20.47 x 12.83 in (52.0 x 32.6 cm) (W x H)
		Viewing Angle (typical)*	178° H/ 178° V (10:1 minimum contrast ratio)
		Brightness (typical)*	500 nits (cd/m ²)
		Contrast Ratio (typical)*	1000:1
		Response Rate (typical)*	8 ms (typical gray to gray)

Technical Specifications - Monitors

	Pixel Pitch	0.270 mm
	Color Depth Support	16.7 million colors
	Backlight Lamp Life (to half brightness)	50K hours
	<i>*Response time 13 ms rise and fall, 6 ms gray to gray.</i>	
On Screen Display (OSD) Controls	Buttons or Switches	Input Select, Auto Adjust, OSD Up, OSD Down, OSD Menu Select, Power
	Languages	English, French, German, Spanish, Italian, Japanese, Dutch
	User Controls	Brightness, contrast, positioning, color temperature, individual color control, serial number display, full screen resolutions, clock, clock phase, input selection (includes separate direct access key for dedicated swap between inputs 1 and 2), factory reset
Signal Interface/ Performance	Horizontal Frequency	30 to 94 kHz (VGA input); 30 to 92 KHz (DVI input) (for modes with pixel clock less than 157 MHz)
	Vertical Frequency	48 to 85 Hz (VGA and DVI input)
	Native Resolution	1920 x 1200 @ 60 Hz (recommended) (native aspect ratio of 16:10)
	Preset VESA Graphic Modes (non-interlaced)	1920 x 1200 @ 60 Hz
		1600 x 1200 @ 60 Hz, 75 Hz
		1280 x 1024 @ 60 Hz, 75 Hz, 85 Hz
		1280 x 960 @ 60 Hz
		1152 x 900 @ 66 Hz
		1024 x 768 @ 60 Hz, 75 Hz, 85 Hz
		800 x 600 @ 60 Hz, 75 Hz
	640 x 480 @ 60 Hz, 75 Hz	
	Text Mode	720 x 400 @ 70 Hz
	Mac Mode	1152 x 870 @ 75 Hz and 832 x 624 @ 75 Hz
Sun Mode	1152 x 900 @ 66 Hz	
Maximum Pixel Clock Speed	202 MHz (VGA input); 162 MHz (DVI input)	
User Programmable Modes	Yes, 20	
Anti-Glare	Yes	
Anti-Static	Yes	
Default Color Temperature	6500 K	

Technical Specifications - Monitors

Video/Other Inputs	Plug and Play	Yes		
	Self Powered USB 2.0 Hub	One upstream, four downstream ports (located on side of monitor, cable included)		
	Input Signal	Two DVI-I (VGA analog and digital) inputs		
	Input Impedance	75 ohms \pm 10%		
	Sync Input	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green		
	Video Cable	VGA to DVI-I; DVI-D to DVI-D		
	Video Cable Length	5.9 ft (1.8 m)		
	Power	Input Power	Auto-Ranging, 90 to 132 VAC and 195 to 265 VAC; internal power supply, 50 Hz/60 Hz	
		Frequency	47.5 to 63 Hz	
		Typical Power Consumption	75 watts	
Maximum		< 110 watts		
Power Saving		< 2 watts		
Mechanical	Power Cable Length	6.2 ft (1.9 m)		
	Dimensions (H x W x D)	Unpacked w/ stand	14.6 (min) to 19.7 (max) x 22 x 9.1 in (37.1 (min) to 50.1 (max) x 55.4 x 23.2 cm)	
		Unpacked w/o stand (head only)	14.4 x 22 x 3.7 in (36.6 x 55.84 x 9.2 cm)	
		Packaged	11.7 x 22.1 x 25.6 in (29.8 x 56.0 x 65.1 cm)	
	Weight	Unpacked	23.6 lbs (10.7 kg)	
		Packaged	23.6 lbs (10.7 kg)	
	Environmental	Tilt Range	-5° to + 25° vertical	
		Swivel Range	-45° to + 45°	
		Height Adjustable	Yes, range 5.1 in (130 mm)	
		Pivot Rotation	Yes	
Base		Detachable, ships detached		
Temperature – Operating		46° to 95° F (10° to 35° C)		
Temperature – Non-operating		6° to 140° F (-10° to 60° C)		
Humidity – Operating		20% to 80% non-condensing		
Humidity – Non-operating		5% to 85%		
Altitude – Operating		+12,000 ft (+3,657.6 m)		
Altitude – Non-operating	+40,000 ft (+12,192 m)			
Other	Accessories Included	VGA to DVI-I cable – connects the graphic card's VGA connector to the monitor's input #2 (DVI-I analog) connector DVI-D to DVI-D cable – connects the graphic		

		card's DVI-D digital connector to the monitor's input #2 (DVI-I digital) connector
	Software	Pivot Pro software from Portrait Displays, Inc. interacts with your PC's native graphics driver to enable seamless portrait screen redraws with a simple mouse-click or keyboard command. Pivot Pro supports 90-degree portrait and landscape views. Language support is available in English, Japanese, French, German, Spanish, Italian, and Traditional and Simplified Chinese. HP Display Assistant is a software utility that allows monitor adjustment, color calibration, and security/asset management using the Display Data Channel Command Interface (DDC/CI) protocol of the connected desktop PC. HP Display LiteSaver feature allows you to schedule Sleep mode at preset times to help protect the monitor against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor.
	User Guide Languages	English, B. Portuguese, French, LA Spanish, Korean, S. Chinese, T. Chinese, Bahasa, Japanese, Danish, Finnish, German, Norwegian, Spanish, Swedish, Greek, Polish, Russian, Slovenian, Turkish
	Warranty Languages	English, Canadian French, LA Spanish, Brazilian Portuguese, Danish, German, Castilian Spanish, French, Italian, Dutch, Norwegian, Finnish, Swedish, Bahasa Indonesian, Korean, T. Chinese, S. Chinese
	Color	Carbonite/silver
	VESA External Mounting	Yes (Standard 4 hole pattern, 100 mm)
	Kensington Lock-Ready	Yes
Options	HP Silver Flat Panel Speaker Bar - Part number: EE418AA	Powered directly by the monitor or PC, the Speaker Bar seamlessly attaches to the monitor's lower bezel to bring full audio support to select HP flat panel monitors. Features include dual speakers with full sound range and an external jack for headphones. Sold separately. For more information, refer to the HP Flat Panel Speaker Bar QuickSpec.
	Certification and Compliance	Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCIB/CCEE Approval, CISPR Requirements, Eastern European Approvals, Energy Star Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 9241-3,7,8 VDT Guidelines, ISO 13406-2 Pixel Defect Guidelines, Mexican NOM Approval, MIC Requirements (New Zealand), MPR-II Compliant, Nordic Approvals (Nemko, Fimko, Demko, Semko), PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 03 (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Microsoft Windows Certification (Microsoft Windows 98, Microsoft Windows 2000, and Microsoft Windows XP)

Technical Specifications - Monitors

Compatibility	Compatible with platforms using the VESA standard video modes. Recommended for use with HP products.
Service and Warranty	Three years parts, labor, and on-site service. 24-hour, 90-day, toll-free technical support. Replacement options may include second business day on-site service, or next business day direct replacement, at HP's sole discretion. With direct replacement, HP will ship a replacement display product directly to you. Using the prepaid shipping labels provided, return your failed display to HP in the same packaging as the replacement. Certain restrictions and exclusions apply. For details see your product warranty or contact HP Customer Support.

© Copyright 2007 Hewlett-Packard Development Company, L.P.

All rights reserved. HP and the HP logo are trademarks of the Hewlett Packard Company in the U.S. and/or other countries.

Microsoft, Windows, Windows Vista, and Windows XP are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. NVIDIA and Quadro are trademarks of NVIDIA Corporation. All other product names mentioned herein may be trademarks of their respective companies.

HP shall not be liable for technical or editorial errors or omissions contained herein. The information is provided as is without warranty of any kind and is subject to change without notice. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty